


150 PSI SEISMIC GATOR ±6" MOVEMENT FLANGED

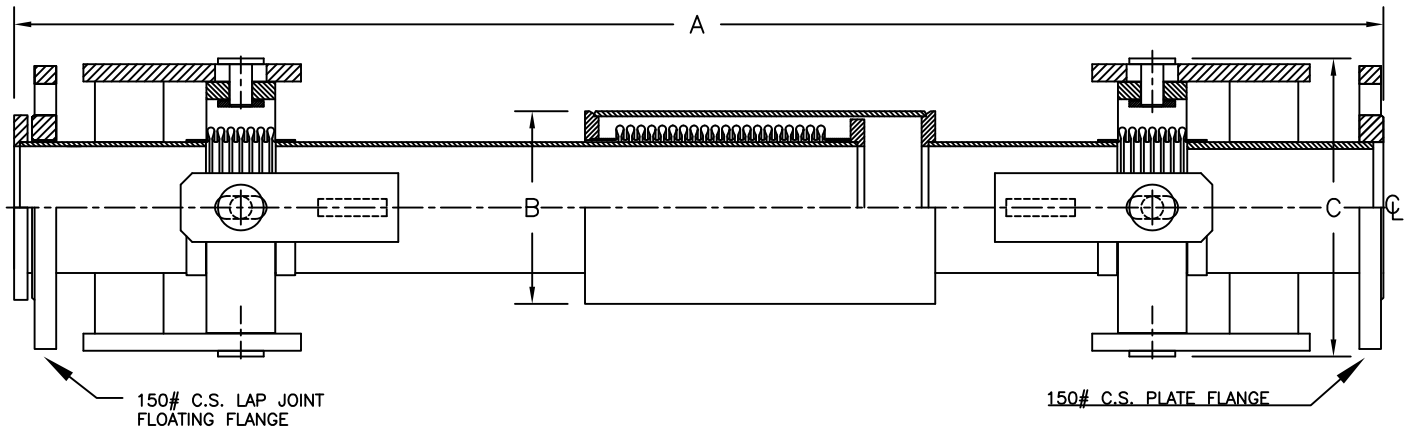

QTY	SIZE		A (in)	B (in)	C (in)	EFFECTIVE AREA (in ²)	SPRING RATE (lb/in)	WEIGHT (lb)	NOTES
	in	mm							
	10	250	95	16	23	135	710		
	12	300	95	18.5	26	182	811		


DESIGN DATA:

TEMP. 70°F. (21 C)
PRESS. 150 PSI (1034 KPa)
TEST PRESS. 225 PSI (1551 KPa)

MATERIAL:

BELLOWS—MULTI-PLY STAINLESS STEEL
OTHER PARTS—CARBON STEEL

MOVEMENT 6" (150 mm) ALL DIRECTIONS



*NOTE: ANCHOR LOADS=(TEST PSI X EFFECTIVE AREA) + (SPRING RATE X 12)

Metraflex
for pipes in motion

2323 W. HUBBARD ST.
CHICAGO, IL 60612
TEL: 312-738-3800
FAX: 312-738-0415
WWW.METRAFLEX.COM

DESCRIPTION: SEISMIC GATOR ±6" MOVEMENT
FLANGED ENDS

DRAWN BY: DTH DATE: 7/6/2017

APPROVED: XXX DATE: MM/DD/YYYY

SCALE: N/A DRAWING NUMBER:

GIL06F

CUSTOMER: _____

PROJECT: _____

ENGINEER: _____