


**I/O Interface: DC Output Bus Bars for 32.5V @ 43A, 1.4kW.**  
**AC Input Terminal Block for 90 to 264VAC 1P with**  
**DB25 Option Connector**

32.5V @ 43A Output on the DC  
Bus Bars with 1/4" Holes




AC Terminal block with  
8-32 screws for 90 to 264VAC 1P  
AC Line.


**Option Connector DB25:**

Pin 1: Remote Sense (+)  
 Pin 3: Power Supply Fail with LED (-128L)  
 Pin 4: Remote Sense (-)  
 Pin 14: Logic Return  
 Pin 16: AC Fail (-1C)  
 Pin 18: Remote Enable/Disable (-2T)

All unused pins will have NC

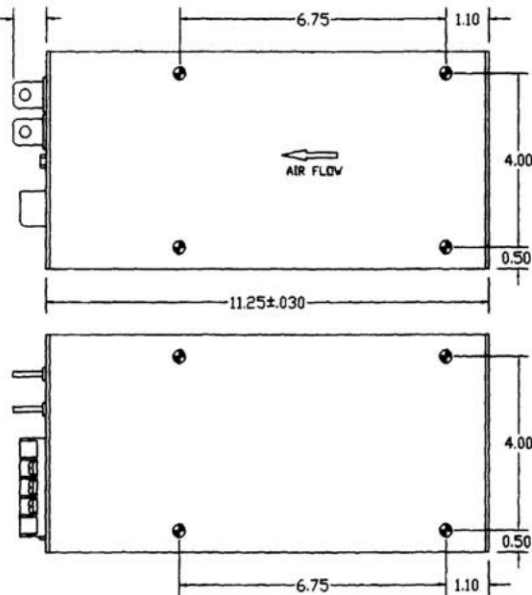

4 Mounting holes (8-32) are  
provided on one side and bottom.  
Max penetration 3/32"



**Replacement for Cherokee  
Model CAR1432F**

Output  
Voltage  
Adjust Pot



**PM3327B-6-1-3-F, 1.4kW, 11/15/2016**

Pioneer Magnetics' reserves the right to change the specifications at any time without prior notice.  
 It is Pioneer Magnetics' policy to improve products as new techniques and components become available.  
 1745 Berkeley Street, Santa Monica CA 90404. Tel: (310) 829-6751 Fax: (310) 453-3929.  
 E-mail: [pmi@pioneeermagnetics.com](mailto:pmi@pioneeermagnetics.com). Web Address: <http://www.pioneeermagnetics.com>