


DR-B


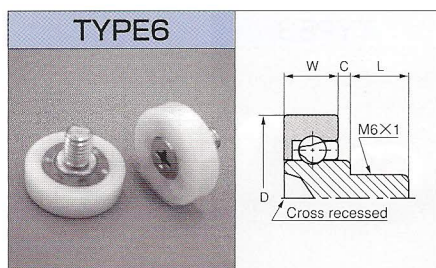


Code	Part No.	D _{-0.1} [mm]	W _{-0.2} [mm]	C _{±0.4} [mm]	L _{±0.5} [mm]	Load ^{*1} [N] (kgf)	Type	Q'ty [pcs/box]	Gross Weight [kg/box]
020200	DR-19-B0.5	19	6	0.5	8	49 (5)	6	2,000	12.5
020207	DR-19-B1-14	19	6	1	14	49 (5)	6	1,500	11.1
020208	DR-19-B1.5	19	6	1.5	8	49 (5)	6	2,000	12.9
020212	DR-19-B3.5	19	6	3.5	8	49 (5)	6	1,500	11.0
020404	DR-22-B0.5-4.5	22	7	0.5	4.5	196 (20)	6	1,000	8.4
020400	DR-22-B0.5	22	7	0.5	8	196 (20)	6	1,000	9.8
020408	DR-22-B1-10	22	7	1	10	196 (20)	6	1,000	9.5
020428	DR-22-B3-10.5	22	7	3	10.5	196 (20)	6	1,000	11.5
020427	DR-22-B3.6-12.4	22	7	3.6	12.4	196 (20)	6	1,000	10.9
020415	DR-22-B3.6-14.5	22	7	3.6	14.5	196 (20)	6	1,000	11.9
020600	DR-24-B0.5	24	7	0.5	8	196 (20)	6	1,000	10.4
020608	DR-24-B3-10.5	24	7	3	10.5	196 (20)	6	1,000	11.7
020702	DR-26-B0.5-4.5	26	7	0.5	4.5	196 (20)	6	1,000	9.7
020700	DR-26-B0.5	26	7	0.5	8	196 (20)	6	1,000	10.1
020720	DR-26-B3-10.5	26	7	3	10.5	196 (20)	6	800	10.7
020719	DR-26-B3.6-12.4	26	7	3.6	12.4	196 (20)	6	800	11.3
020714	DR-26-B5-11	26	7	5	11	196 (20)	6	800	8.8
020800	DR-28-B0.5	28	7	0.5	8	196 (20)	6	500	6.7
020803	DR-28-B2-15	28	7	2	15	196 (20)	6	500	6.7
020805	DR-28-B3-10.5	28	7	3	10.5	196 (20)	6	500	6.9
021000	DR-30-B0.5	30	7	0.5	8	196 (20)	6	500	6.8
021005	DR-30-B3-10.5	30	7	3	10.5	196 (20)	6	500	7.6
021004	DR-30-B3.6-12.4	30	7	3.6	12.4	196 (20)	6	500	12.5

***1 Allowable Load at 300min -1 (300r.p.m.)**

Size limits can be modified for practical applications. Please contact our sales/engineering departments for further information and assistance.

DR-B

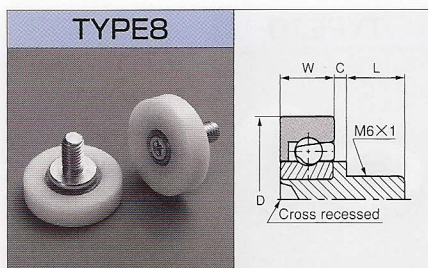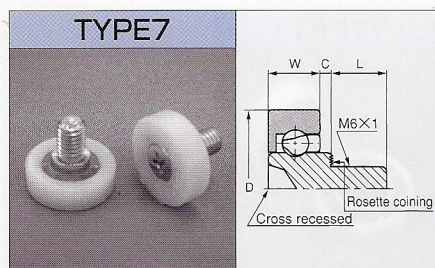

Code	Part No.	D _{-0.1} [mm]	W _{-0.2} [mm]	C _{±0.4} [mm]	L _{±0.5} [mm]	Load ^{*1} [N] (kgf)	Type	Q'ty [pcs/box]	Gross Weight [kg/box]
020205	DR-19-B1-5.5	19	6	1	5.5	49 (5)	7	2,000	11.5
020204	DR-19-B1	19	6	1	8	49 (5)	7	2,000	13.5
020210	DR-19-B2-4.5	19	6	2	4.5	49 (5)	7	2,000	12.1
020209	DR-19-B2	19	6	2	8	49 (5)	7	2,000	14.0
020211	DR-19-B2.7	19	6	2.7	8	49 (5)	7	1,500	10.2
020214	DR-19-B3	19	6	3	8	49 (5)	7	1,500	10.7
020406	DR-22-B1	22	7	1	8	196 (20)	7	1,000	9.0
020411	DR-22-B2-5.5	22	7	2	5.5	196 (20)	7	1,000	9.3
020409	DR-22-B2	22	7	2	8	196 (20)	7	1,000	10.3
020413	DR-22-B3	22	7	3	8	196 (20)	7	1,000	11.3
020418	DR-22-B4-4.5	22	7	4	4.5	196 (20)	7	1,000	10.3
020416	DR-22-B4	22	7	4	8	196 (20)	7	1,000	11.7
020420	DR-22-B5	22	7	5	8	196 (20)	7	1,000	12.3
020422	DR-22-B6	22	7	6	8	196 (20)	7	1,000	12.8
020602	DR-24-B2	24	7	2	8	196 (20)	7	1,000	11.4
020604	DR-24-B3	24	7	3	8	196 (20)	7	1,000	11.7
020605	DR-24-B4	24	7	4	8	196 (20)	7	1,000	12.4
020606	DR-24-B5	24	7	5	8	196 (20)	7	1,000	12.5
020607	DR-24-B6	24	7	6	8	196 (20)	7	1,000	13.3
020705	DR-26-B2	26	7	2	8	196 (20)	7	800	9.2
020707	DR-26-B3	26	7	3	8	196 (20)	7	800	9.7
020710	DR-26-B4	26	7	4	8	196 (20)	7	800	10.1
020716	DR-26-B6-6	26	7	6	6	196 (20)	7	800	10.7
020715	DR-26-B6	26	7	6	8	196 (20)	7	800	11.1
020801	DR-28-B2	28	7	2	8	196 (20)	7	500	6.7
021002	DR-30-B3	30	7	3	8	196 (20)	7	500	11.3
020429	DR-22-BH2-11	22	7	2	11	196 (20)	8	1,000	12.3
020430	DR-22-BH3-11	22	7	3	11	196 (20)	8	1,000	11.4
020722	DR-26-BH2-11	26	7	2	11	196 (20)	8	800	10.6
020804	DR-28-BH2-11	28	7	2	11	196 (20)	8	500	6.9

***1 Allowable Load at 300min -1 (300r.p.m.)**

Size limits can be modified for practical applications. Please contact our sales/engineering departments for further information and assistance.