


No.	Tag No.	Model	TYPE	MOUNT	WET MATERIAL	CAPILLARY LENGTH	CONNECTION		RANGE		ACCURACY	ACCESSORY							Page	REMARKS
							SIZE (Inch)	RATING (#)	RANGE	UNIT		SNUBB ER	GAUGE SAVER	SIPHON	FLUSHING RING	Valve Manifold		OIL FILLED		
															Type	Material				
23	02 - PG - 2002 B	PB.4.11.4NM.AD.TS.OR.PS.MC	BOURDON	—	SS316L	—	1/2	NPT (M)	0 — 40	MPa	±1.0%F.S.	—	—	—	—	—	—	—	15	
24	02 - PG - 2003 A	PB.4.XX.TS.OR.PS/NESS.S6L.CAP.X1	PG + DFS with Capillary	2" STANCHION	SUS316L	3 m	1	300 RF	0 — 4	MPa	±1.6%F.S.	—	—	—	—	—	—	16	SUS316 Flange	
25	02 - PG - 2003 B	PB.4.XX.TS.OR.PS/NESS.S6L.CAP.X1	PG + DFS with Capillary	2" STANCHION	SUS316L	3 m	1	300 RF	0 — 4	MPa	±1.6%F.S.	—	—	—	—	—	—	16	SUS316 Flange	
26	02 - PG - 2006 A	PB.4.11.4GM.AD.TS.OR.PS/NESS	DIAPHRAGM SEAL	DIRECT	SUS316L	—	1	2500 RJ	0 — 25	MPa	±1.0%F.S.	—	—	—	—	—	—	17	SUS316 Flange	
27	02 - PG - 2006 B	PB.4.11.4GM.AD.TS.OR.PS/NESS	DIAPHRAGM SEAL	DIRECT	SUS316L	—	1	2500 RJ	0 — 25	MPa	±1.0%F.S.	—	—	—	—	—	—	17	SUS316 Flange	
28	02 - PG - 2022 A	PB.4.11.4GM.AD.TS.OR.PS/NESS	DIAPHRAGM SEAL	DIRECT	SUS316L	—	1	2500 RJ	0 — 25	MPa	±1.0%F.S.	—	—	—	—	—	—	17	SUS316 Flange	
29	02 - PG - 2022 B	PB.4.11.4GM.AD.TS.OR.PS/NESS	DIAPHRAGM SEAL	DIRECT	SUS316L	—	1	2500 RJ	0 — 25	MPa	±1.0%F.S.	—	—	—	—	—	—	17	SUS316 Flange	
30	02 - PG - 2007	PB.4.11.4NM.AD.TS.OR.PS.MC	BOURDON	—	SS316L	—	1/2	NPT (M)	0 — 25	MPa	±1.0%F.S.	—	—	—	—	—	—	15		
31	02 - PG - 2008	PB.4.11.4GM.AD.TS.OR.PS/NESS	DIAPHRAGM SEAL	DIRECT	SUS316L	—	1	2500 RJ	0 — 25	MPa	±1.0%F.S.	—	—	—	—	—	—	17	SUS316 Flange	
32	02 - PG - 2009	PB.4.11.4GM.AD.TS.OR.PS/NESS	DIAPHRAGM SEAL	DIRECT	SUS316L	—	1	1500 RJ	0 — 25	MPa	±1.0%F.S.	—	—	—	—	—	—	14	SUS316 Flange	
33	02 - PG - 2010	PB.4.11.4GM.AD.TS.OR.PS/NESS	DIAPHRAGM SEAL	DIRECT	SUS316L	—	1	2500 RJ	0 — 25	MPa	±1.0%F.S.	—	—	—	—	—	—	17	SUS316 Flange	
34	02 - PG - 2011	PB.4.11.4GM.AD.TS.OR.PS/NESS	DIAPHRAGM SEAL	DIRECT	SUS316L	—	1	2500 RJ	0 — 25	MPa	±1.0%F.S.	—	—	—	—	—	—	17	SUS316 Flange	
35	02 - PG - 2012	PB.4.11.4NM.AD.TS.OR.PS.MC	BOURDON	—	SS316L	—	1/2	NPT (M)	0 — 4	MPa	±1.0%F.S.	—	—	Yes	—	—	—	15,29		
36	02 - PG - 2013	PB.4.11.4NM.AD.TS.OR.PS.MC	BOURDON	—	SS316L	—	1/2	NPT (M)	0 — 1	MPa	±1.0%F.S.	—	—	Yes	—	—	—	15,29		
37	02 - PG - 2014	PB.4.11.4NM.AD.TS.OR.PS.MC	BOURDON	—	SS316L	—	1/2	NPT (M)	0 — 0.6	MPa	±1.0%F.S.	—	—	Yes	—	—	—	15,29		
38	02 - PG - 2016	PB.4.11.4GM.AD.TS.OR.PS/NESS	DIAPHRAGM SEAL	DIRECT	SUS316L	—	1	2500 RJ	0 — 25	MPa	±1.0%F.S.	—	—	—	—	—	—	17	SUS316 Flange	
39	02 - PG - 2017	PB.4.11.4GM.AD.TS.OR.PS/NESS	DIAPHRAGM SEAL	DIRECT	SUS316L	—	1	2500 RJ	0 — 25	MPa	±1.0%F.S.	—	—	—	—	—	—	17	SUS316 Flange	
40	02 - PG - 2018	PB.4.11.4GM.AD.TS.OR.PS/NESS	DIAPHRAGM SEAL	DIRECT	SUS316L	—	1	2500 RJ	0 — 25	MPa	±1.0%F.S.	—	—	—	—	—	—	17	SUS316 Flange	
41	02 - PG - 2019	PB.4.11.4GM.AD.TS.OR.PS/NESS	DIAPHRAGM SEAL	DIRECT	SUS316L	—	1	2500 RJ	0 — 25	MPa	±1.0%F.S.	—	—	—	—	—	—	17	SUS316 Flange	
42	02 - PG - 2020	PB.4.11.4GM.AD.TS.OR.PS/NESS	DIAPHRAGM SEAL	DIRECT	SUS316L	—	1	2500 RJ	0 — 25	MPa	±1.0%F.S.	—	—	—	—	—	—	17	SUS316 Flange	
43	02 - PG - 3001	PB.4.11.4NM.AD.TS.OR.PS.MC	BOURDON	—	SS316L	—	1/2	NPT (M)	0 — 4	MPa	±1.0%F.S.	—	—	Yes	—	—	—	15,29		
44	02 - PG - 3002	PB.4.11.AD.TS.OR.PS CSLS6L.S6.1"ANSI300#RF.05.MC	DIAPHRAGM SEAL	DIRECT	SS316L	—	1	300 RF	0 — 4	MPa	±1.0%F.S.	—	—	—	—	—	—	18	SS316 Flange	
45	02 - PG - 3003 A	PB.4.11.AD.TS.OR.PS CSLS6L.S6.1"ANSI300#RF.05.MC	DIAPHRAGM SEAL	DIRECT	SS316L	—	1	300 RF	0 — 4	MPa	±1.0%F.S.	—	—	—	—	—	—	18	SS316 Flange	

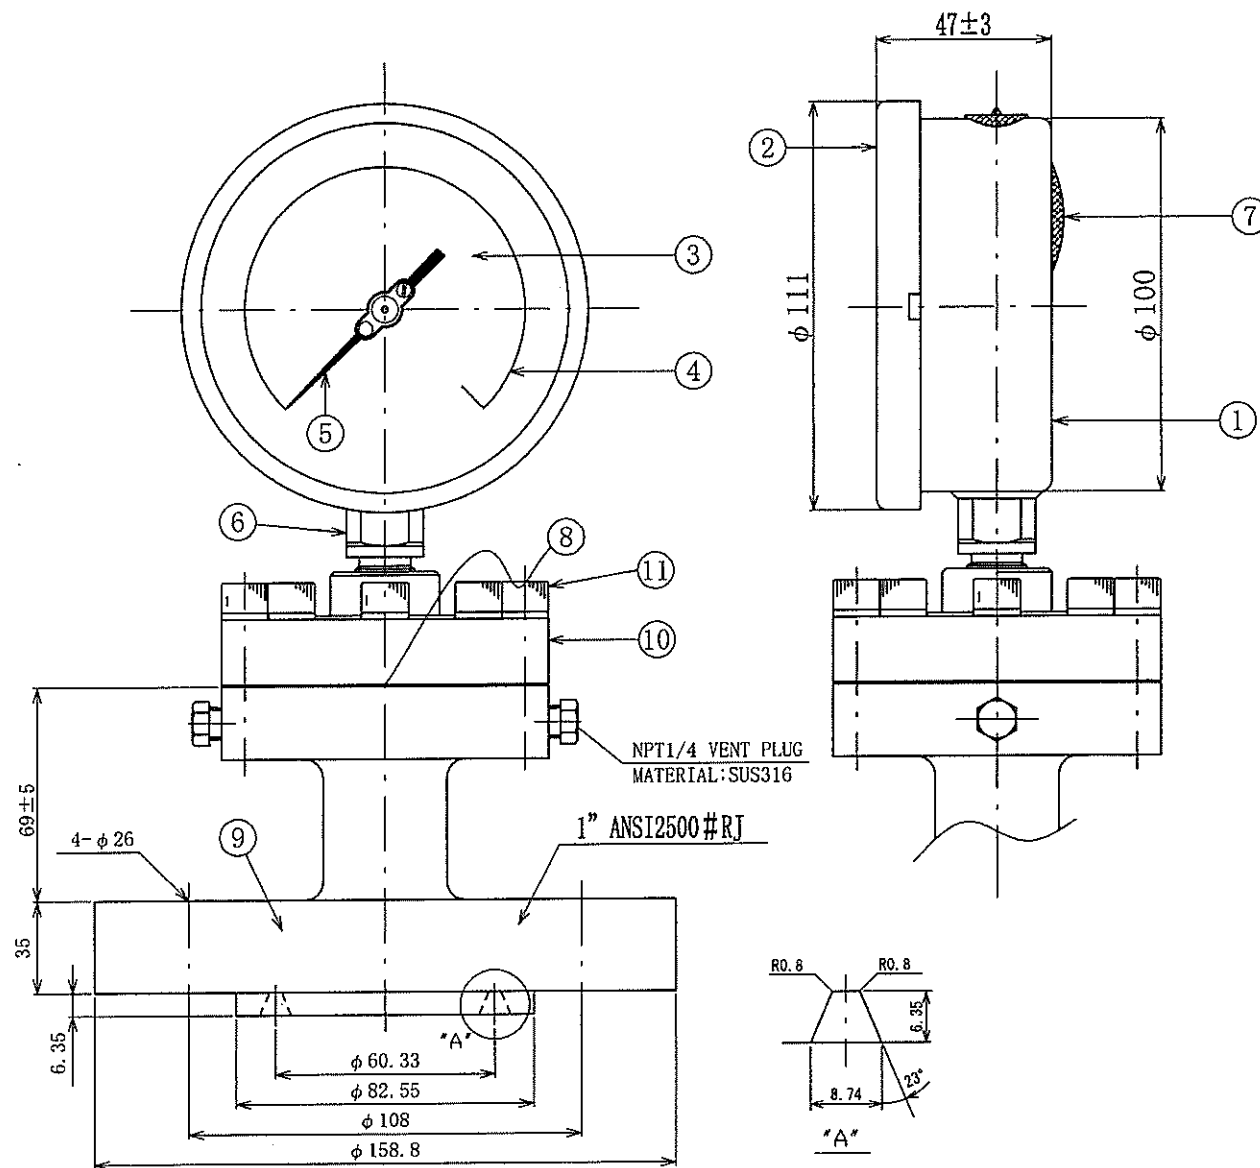

SYM	REVISION	REV. BY	DATE
ALLOWANCE ±1.5 (EXCEPT APPOINTED SIZE)			
11	BOLTS	SUS304	
10	UPPER FLANGE	SUS304	
9	FLANGE	REFER TO SPEC SHEET	
8	DIAPHRAGM	REFER TO SPEC SHEET	
7	BLOW OUT CAP	NEOPRENE	
6	SOCKET	SS316L	
5	POINTER	ALUM.	
4	DIAL	ALUM.	
3	WINDOW	SAFETY GLASS	
2	BEZEL	SS304	
1	CASE	SS304	
No.	NAME	MATERIAL	
SCALE	DR. BY Yamaguchi	Mar. -8-' 16	
f.	APPD Saito	Mar. -8-' 16	
NESS NESSTECH INC.			
TITLE 4" SEALED DIAPHRAGM GAUGE WITH I SECTION FLANGE (ANSI)			
MODEL NO.	PB. 4. 11/NESS		
DRAWING NO.	2-38-146274-2		17