



TECHNICAL SPECIFICATIONS FOR TYPE J 2000-592.14/380-400V/50HZ

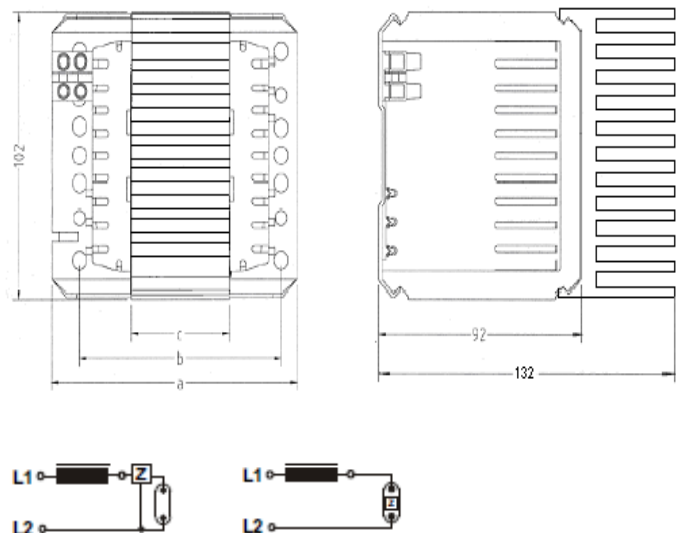

J2000.592.14

J2000.592.14Z

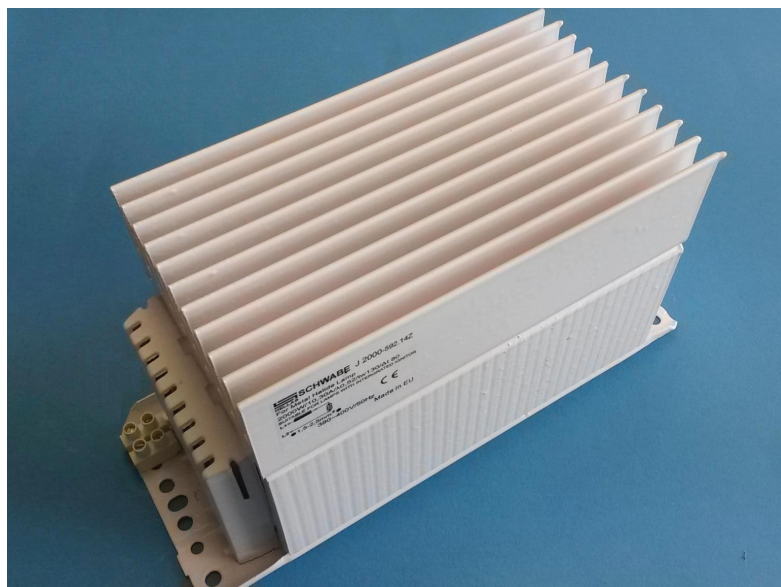

Electromagnetic Ballasts for M.Halide lamps.
Shape 92x102mm
Vacuum impregnated with polyester resin
Screw terminals: 2,5 mm²
tw 130, Protection class I
ISO 9001/2008

EN 61347:2008+A1:2011, EN 61347-2-9:2001+A1:2003+A2:2006 , EN 60923:2005+A1:2006
IEC 61347 (Safety)
IEC 62384 (Working Method)
Capacitor: 60Mf/400V



Ballasts for Metal Halide Lamps (380-400V/ 60Hz)

BALLAST	LAMP		Nominal Current	Cos φ	TEMPERATURE		DIMENSIONS				
	TYPE	POWER			tw	Δt	L	L1	L2	W	H
J2000.592.14Z	HI	2000W	8,8 A	0,52	130°C	75	248 mm	233 mm	185 mm	102 mm	132 mm
J2000.592.14	HI	2000W	10,3A	0,52	130°C	75	248 mm	233 mm	185 mm	102 mm	132 mm
J2000.592.14Z	HI	2000W	10,3A	0,52	130°C	75	248 mm	233 mm	185 mm	102 mm	132 mm