
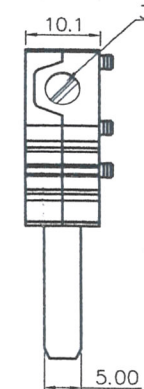
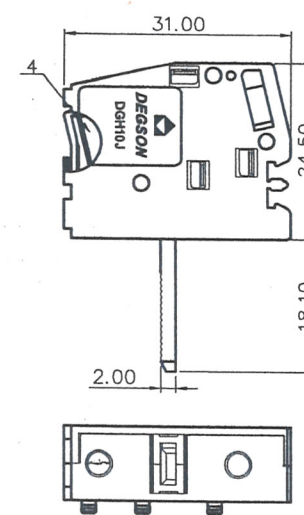
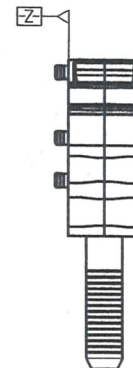
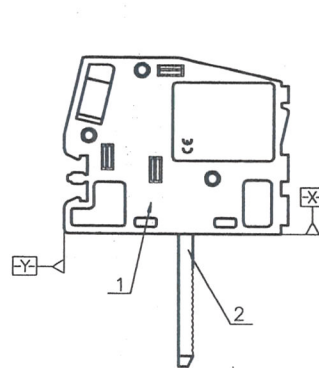


DGH10J-01P-1Y-01A(H)

REVISION RECORD

REV	ECN	DESCRIPTION	DRFT	DATE
-----	-----	-------------	------	------

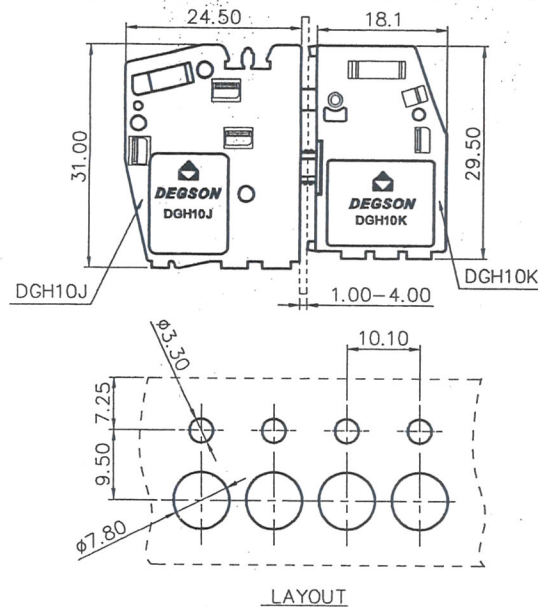

NOTES1:

UL Standard

- 1.Rated Voltage/Current : 300V / 65A
- 2.Withstanding Voltage : AC1600V/1Min.
- 3.Torque Value : M4.0 , 10.53Lb.in
- 4.Wire Range : 24~6AWG

IEC Standard

1. Pollution Degree	3
Overvoltage Category	III
Rate Impulse Voltage(KV)	8.0V
Rate Voltage(V)	500V
Rate Current(A)	76A

- 2.Torque Value : M4.0 , 1.2N·m
- 3.Wire Range : 0.5~16mm²





NOTES2:

- 1.Dimension shall be interpreted per ASME Y14.5-2009
- 2.Pitch : 10.10mm, Poles : N=01P
- 3.Stripping length : 10mm
- 4.Operating temperature : -40°C~+105°C
- 5.Undimensioned Tolerances:

Pitch Range In mm	Nominal Dimension Range In mm	±	□
Over 6 TO 10	Over 30 TO 60	0.1/10	
Over 10 TO 24	Over 60 TO 100	<	
Over 24 TO 30	Over 100 TO 150	±2*	
Over 30 TO 36	Over 150 TO 200		

6.RoHS Compliance

DGH10K-01P-1Y-00A(H)

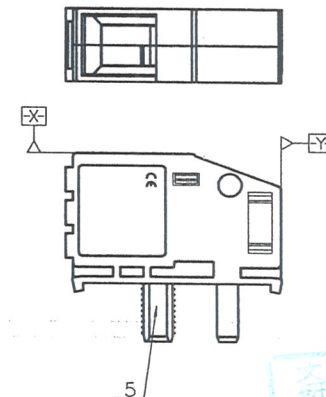

ITEM	NAME OF PART	MATERIAL	NOTES
5	Housing-K	PA66	UL94V-0
4	Cage	CopperAlloy	Ni Plated
3	Screw	Steel	Zn Plated
2	Current Carrier	CopperAlloy	Sn Plated
1	Housing-J	PA66	UL94V-0

PART NO.:	/	NAME:	NINGBO DEGSON ELECTRICAL CO., LTD
APPD:	Apple 2017.3.14	NAME:	DGH10-01P-1Y-00A(H)
CHKD:	CLB 2017.3.14	TITLE:	ASSEMBLY DRAWING
DRFT:	Apple 2015.01.06	REV	TO
THIRD ANGLE PROJECTION		DRAWING NO.:	DGH10-C01
		SHEET	1/1
		DO NOT SCALE DRAWING	SCALE 1:1

2017.03.28
(仅限内部使用, 对外无效)