


TECHNICAL SPECIFICATIONS

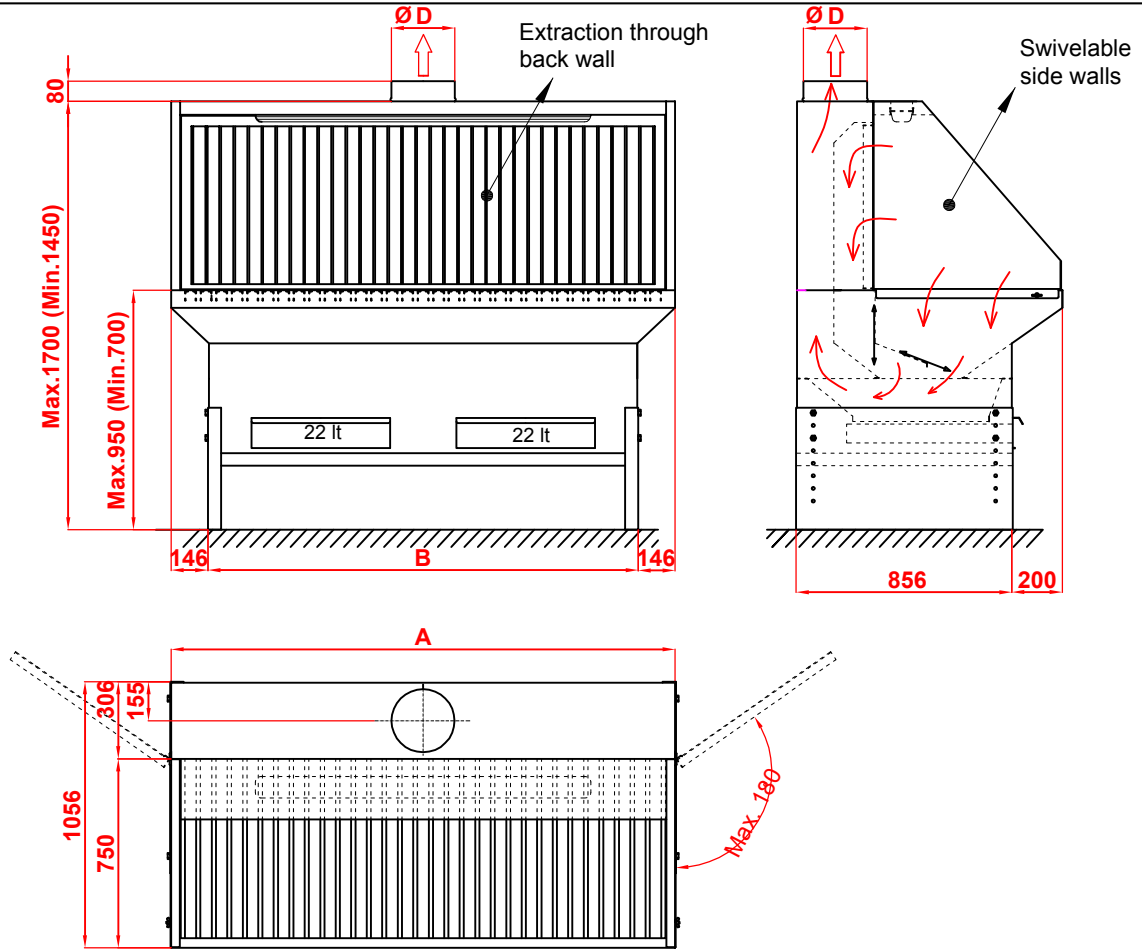

- There are two extraction paths: from the back-wall and through bottom-bars. This provides a strong extraction effect and high occupational safety.
- The capacity of both extraction paths can be adjusted from 0% up to 100%, depending on the requirements.
- The standard workbench table has bars, made of steel.
- The bars of the workbench table can also be delivered with wooden bars, on request.

DESCRIPTION	T-1000	T-1500	T-2000
A	1000 mm	1500 mm	2000 mm
B	708 mm	1208 mm	1708 mm
ØD	200 mm	250 mm	280 mm
Dust drawer	1 x 22 lt	1 x 22 lt	2 x 22 lt
Net weight (with steel bars)	245 kg	335 kg	420 kg
Net weight (with wood bars)	262 kg	361 kg	455 kg
Recommended air-suction volume	2000 - 2600 m ³ /h	3000 - 3800 m ³ /h	4000 - 5000 m ³ /h
Pressure loss of the workbench, Δp	110 - 190 Pa	110 - 190 Pa	110 - 190 Pa
Lighting - IP 65	1 x 14 W - 663 mm	1 x 28 W - 1273 mm	1 x 28 W - 1273 mm