


OUTPUT	POLE	VOLTS	FREQ	TIME RATING	MODEL	FRAME NO.	CUSTOMER:
30HP	6	$\frac{208}{415}, \frac{230}{460}, \frac{220}{440}, 380$	$50, 60, \frac{50}{60}, \frac{50}{60}$	S1	FBDP-HD	200M	ORDER NO:

* TERMINAL BOX: WITH TERMINAL BLOCK

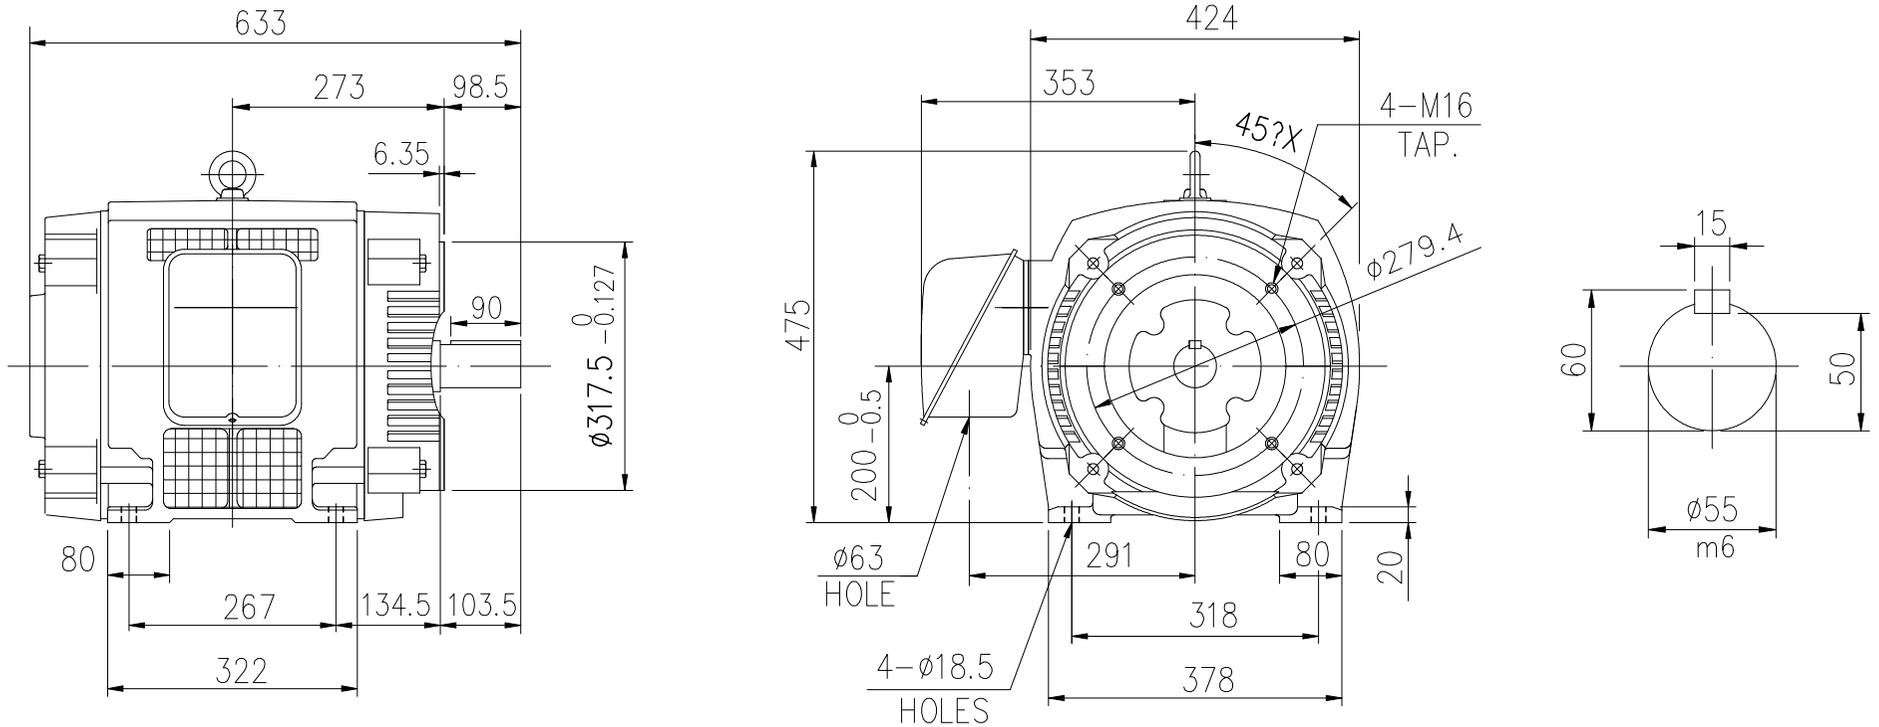

PRELIMINARY DRAWING FOR REFERENCE ONLY.

APPROX WEIGHT						SCALE	1:10
260KG						DWG. NO: AS-971114	
BEARING NO.		DRIP-PROOF TYPE SQUIRREL CAGE ROTOR	OUTLINE 3-PHASE INDUCTION MOTOR	DESIGNED	MARK.LIN MAR.07,2008	DIMENSIONS IN MM	
L.S	O.S			CHECKED	T.M.LIAO MAR.07,2008	3RD ANGLE PROJECTION	
6313zz	6212zz			APPROVED	T.M.LIAO MAR.07,2008		