
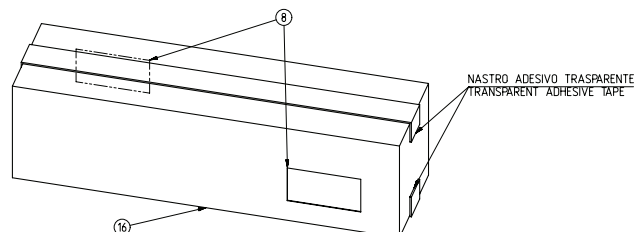


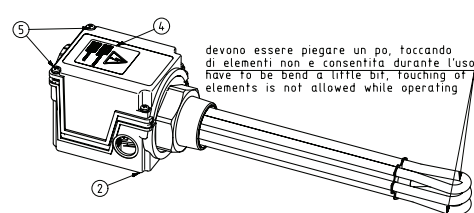


6 DEVE ESSERE APERTO
TO BE OPENED

DETAIL A

1. COLLAUDO PNEUMATICO 10BAR (1 MPa)
PNEUMATIC PRESSURE TEST 10BAR (1 MPa)
2. PROVA DI RIGIDITA' 1600V x 3"
HIGH VOLTAGE TEST 1600V x 3"
3. ISOLAMENTO 5000 MOhm
INSULATION 5000 MOhm



Viessmann
FZC 7783557 Teil 000 Vers. 01
Änderungs-Nr.: 338017

16	SCATIA CAROTEA 425/40/145 V1550N	1	1,000	1379/1610	
17	CAD COPRIS 52 X MAP 1.797	1	0,075	170/1330	
18	CAD 52 X 1000 MERO	1	0,230	1507/1710	
19	SCATIA LUMINII 5052429	1	1,000	1375/1550	CONFERMA
20	INSTRUMENT 30 542329	1	1,000	1500/1021	CONFERMA
21	INSTRUMENT PCEI 5	1	2,000	1018/1400	CONFERMA
22	SNP 10 13 5 CDR 93	1	1,000	1509/140	CONFERMA
23	INSTRUMENT 1013 TRANSPAR 43045	1	1,000	1512/1620	CONFERMA
24	ETICHETA 10548 BIANCO	2	2,000	1371/1440	
25	ETICHETA 10548 BIANCO	1	1,000	1458/1500	
26	ETICHETA 10160 A5 70306	1	1,000	1416/154	
27	ETICHETA 10167 70176	1	1,000	1402/16425	
28	ETICHETA 10548 BIANCO 1 ASSIEMBLA E 10510NE	1	1,000	1371/1517	
29	CAD 73200 MERO 50	1	1,000	1518/1013	
30	ASSIEMBLA 10510NE MERO	1	1,000	1518/1013	
31	INSTRUMENT 10548 BIANCO 5 INCL.OTD 10548 10548	1	1,000	1371/1609/1394	

		DENOMINAZIONE		CP	DATA	CODICE	NOTE	Scala
INCOLLOY s.p.a. 		RESISTENZA ELETTRICA					DISEGNO N. 18GL1EL50	1.1
25-07-2009 		CLIENTE		Viessmann Werke GmbH & Co. KG				
25-07-2010 		REV. DATA AUT. VERIFIC. CONT.		DESCRIZIONE				
25-07-2010 		250107 relia. mch		250107 relia. mch. C-CHANGED. COMP. 3 WAS 37189150				
25-07-2010 		250107 relia. mch		CUSTOMER CODE UPDATED				
25-07-2010 		250107 relia. mch		N-Phase ADDED				
MATERIALE INCOLLOY-825 RICOTTURA 1630° 81AKS								
D'AM GUINIA 8.5 RIP CURVA NE T. 92-1 SIGILLATURA 3.11.106 TRATTAMENTO								

001	7783557	230	6000 +5%, -10%	10.7	24,99 - 29,16	5812179-01
Pos	Carte client	Volt	Watt	W/cm2	Ohm MIN - MAX N.Phase	TYPE DESIGNATION