
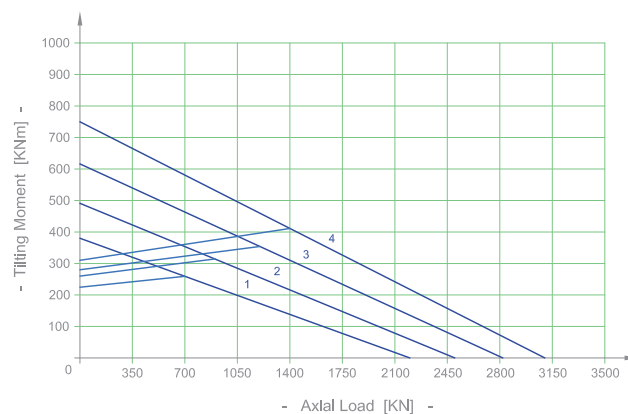




## E.25.B

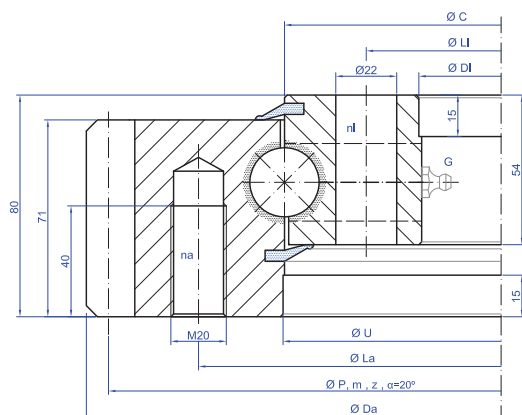

| Bearing Type     | Dimensions |                 |         |                  | Fixing holes |          |          |          | Gear teeth |    |         | Tooth Force  |              | Mass         |
|------------------|------------|-----------------|---------|------------------|--------------|----------|----------|----------|------------|----|---------|--------------|--------------|--------------|
|                  | Da<br>mm   | U<br>+IT8<br>mm | C<br>mm | Di<br>+IT8<br>mm | La<br>mm     | na<br>n° | Li<br>mm | ni<br>n° | P<br>mm    | m  | z<br>n° | Fz nor<br>KN | Fz max<br>KN | Weight<br>KG |
| 1 E.900.25.00.B  | 898        | 755             | 754     | 657              | 816          | 24       | 695      | 24       | 882        | 9  | 98      | 50,8         | 71,1         | 128          |
| 2 E.1000.25.00.B | 997        | 855             | 854     | 757              | 916          | 28       | 795      | 28       | 981        | 9  | 109     | 50,8         | 71,1         | 145          |
| 3 E.1100.25.00.B | 1096       | 955             | 954     | 857              | 1016         | 30       | 895      | 30       | 1080       | 9  | 120     | 50,8         | 71,1         | 155          |
| 4 E.1200.25.00.B | 1198       | 1055            | 1054    | 957              | 1116         | 30       | 995      | 30       | 1180       | 10 | 118     | 55,5         | 77,6         | 171          |

G = N°4 x Grease nipples DIN 71412 AM 8x1 equally-spaced

## E.20.C

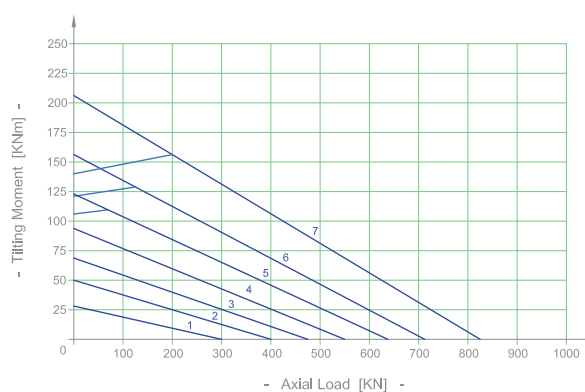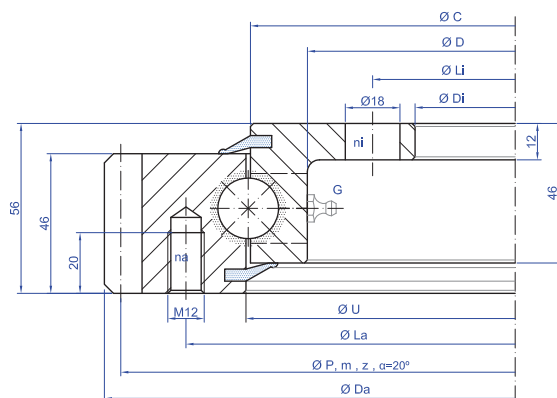

| Bearing Type     | Dimensions |         |         |         |          | Fixing holes |          |          |          | Gear teeth |   |         | Tooth Force  |              | Mass         |
|------------------|------------|---------|---------|---------|----------|--------------|----------|----------|----------|------------|---|---------|--------------|--------------|--------------|
|                  | Da<br>mm   | U<br>mm | C<br>mm | D<br>mm | Di<br>mm | La<br>mm     | na<br>n° | Li<br>mm | ni<br>n° | P<br>mm    | m | z<br>n° | Fz nor<br>KN | Fz max<br>KN | Weight<br>KG |
| 1 E.505.20.00.C  | 504        | 415,5   | 412,5   | 375     | 304      | 455          | 10       | 332      | 12       | 495        | 5 | 99      | 17,8         | 24,9         | 29           |
| 2 E.650.20.00.C  | 640,8      | 545,5   | 542,5   | 505     | 434      | 585          | 14       | 462      | 14       | 630        | 6 | 105     | 21,2         | 29,7         | 40           |
| 3 E.750.20.00.C  | 742,8      | 645,5   | 642,5   | 605     | 534      | 685          | 16       | 562      | 16       | 732        | 6 | 122     | 21,2         | 29,7         | 47           |
| 4 E.850.20.00.C  | 838,8      | 745,5   | 742,5   | 705     | 634      | 785          | 18       | 662      | 16       | 828        | 6 | 138     | 21,2         | 29,7         | 53           |
| 5 E.950.20.00.C  | 950,4      | 845,5   | 842,5   | 805     | 734      | 885          | 18       | 762      | 18       | 936        | 8 | 117     | 28,3         | 39,6         | 64           |
| 6 E.1050.20.00.C | 1046       | 945,5   | 942,5   | 905     | 834      | 985          | 20       | 862      | 20       | 1032       | 8 | 129     | 28,3         | 39,6         | 69           |
| 7 E.1200.20.00.C | 1198       | 1096    | 1093    | 1055    | 984      | 1135         | 22       | 1012     | 20       | 1184       | 8 | 148     | 28,3         | 39,6         | 82           |

G = N°4 x Grease nipples DIN 71412 AM 8x1 equally-spaced