



WL16

Max Flow: 200 gpm (757 lpm)



WL16 In-Tank Filters

Working Pressures to: 200 psi
1380 kPa
13.8 bar

Rated Static Burst to: 300 psi
2070 kPa
20.7 bar

Flow Range to: 200 gpm
757 lpm

Features

WL16 in-tank filters meet the HF4 automotive standard. The quick disconnect cover allows for easy and efficient filter change-outs. An optional secondary inlet port offers the use of a second return line. These units can be top or side reservoir mounted. Use the optional anti-backflow valve (X011053) when installing this filter assembly to the side of a reservoir. DT high-performance replacement filters are available in four different media grades to fit any application.

- Head Material: aluminum
- Housing Material: Steel



Beta Rating

- Performance to $\beta_{5(c)}=1000$

Porting Size Options

- 1½" NPT
- SAE-24 O-ring
- 1½" SAE 4-Bolt Flange Code 61

Replacement Filter Lengths

- 9.04" / 230 mm
- 18.08" / 459 mm
- 27.51" / 699 mm

Standard Bypass Ratings

- 50 psi / 345 kPa / 3.5 bar
- 25 psi / 172.5 kPa / 1.72 bar

Assembly Weight

- Single Length, 5.25 lbs / 2.3 kg
- Double Length, 16 lbs / 7.3 kg
- Triple Length, 23 lbs / 10 kg

Operating Temperatures

- -45° to 250°F (-43° to 121°C)


Filter Collapse Ratings

- 150 psid / 1035 kPa / 10.3 bar


WL16 Specification Illustrations

All dimensions are shown in millimeters [inches].

Assembly - Side View

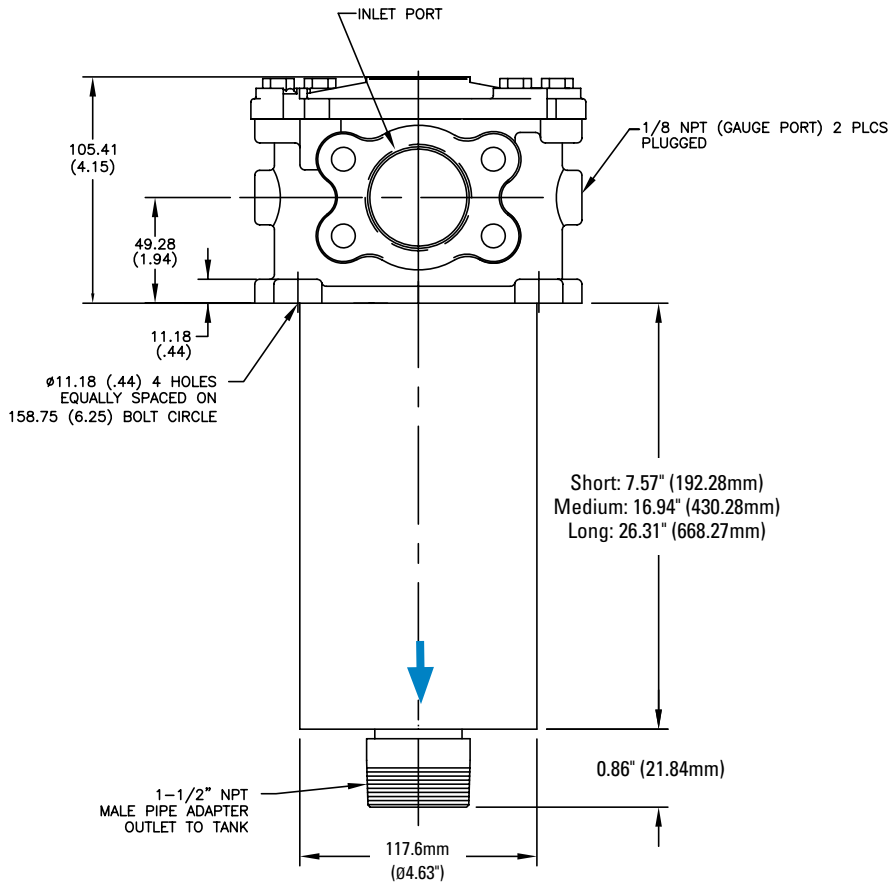

Head - Top View

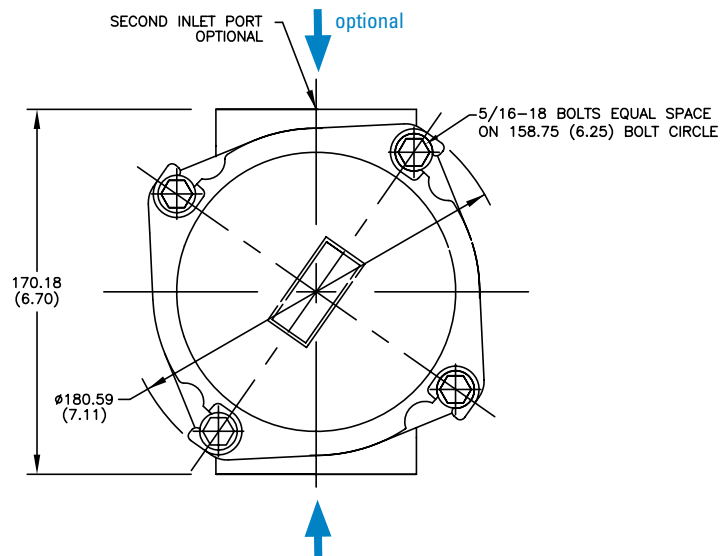

Applications

- Cooling Circuits
- Fluid Conditioning Systems
- Lube Oil Systems
- Meets HF4 Specification
- Process Systems
- Return Lines
- Side Loop Systems



WL16

Max Flow: 200 gpm (757 lpm)



WL16 Components

High-Performance DT Filter Choices


Media Type	$\beta_{x(c)} = 1000$ Rating based on ISO 16889	Length		Donaldson Part No.	Comments
		in	mm		
DT Synteq Synthetic	2 μ m	9.04	230	P568816	DT-HF4-9-2UM
	5 μ m	9.04	230	P566270	DT-HF4-9-5UM
	8 μ m	9.04	230	P566271	DT-HF4-9-8UM
	12 μ m	9.04	230	P566272	DT-HF4-9-14UM
	23 μ m	9.04	230	P566273	DT-HF4-9-25UM
	5 μ m	18.08	459	P566274	DT-HF4-18-5UM
	8 μ m	18.08	459	P566275	DT-HF4-18-8UM
	12 μ m	18.08	459	P566276	DT-HF4-18-14UM
	23 μ m	18.08	459	P566277	DT-HF4-18-25UM
	5 μ m	27.51	699	P566278	DT-HF4-27-5UM
	8 μ m	27.51	699	P566279	DT-HF4-27-8UM
	14 μ m	27.51	699	P566280	DT-HF4-27-14UM
	25 μ m	27.51	699	P566281	DT-HF4-27-25UM

All Donaldson DT filters utilize glass fiber media with an epoxy-based resin system for the ultimate in chemical compatibility.
All Donaldson DT filters are potted with epoxy-based adhesives.
Standard collapse designs are double wire-backed using epoxy-coated steel mesh for maximum pleat support and dirt capacity.
Viton® seals are standard on all Donaldson DT filters. Viton® is a registered trademark of E. I. DuPont de Nemours and Company.




Performance Data

WL16 Housing Only

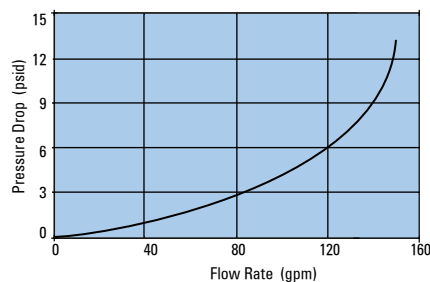


WL16 Bypass Valve

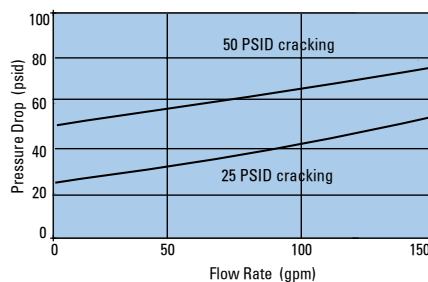


WL16 9" DT Filter Only

DT-HF4-9, 9"/229mm

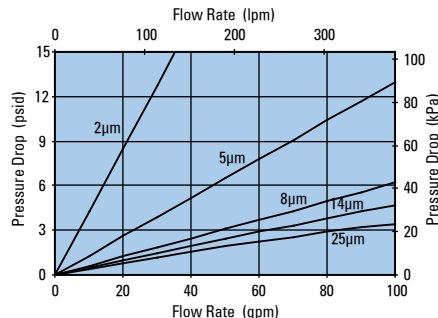


WL16 18" DT Filter Only

DT-HF4-18, 18"/457mm

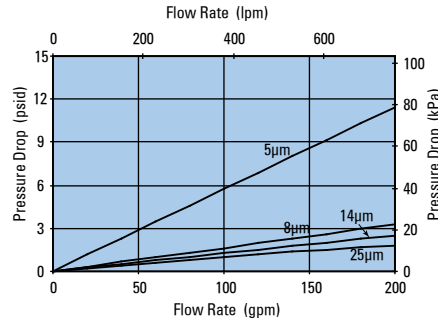

WL16 27" DT Filter Only

DT-HF4-27, 27"/686mm

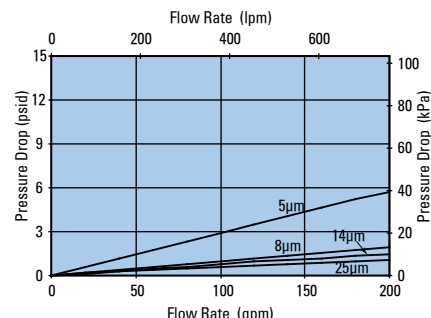

Filter Assembly Choices

Port Size	Bypass Rating	Seal Material	Indicator Style & Location	Housing Length	Donaldson Part No.
(2) SAE-24	25 psi / 1.72 bar	Buna-N	Port Machined & Plugged	9" (228.6mm)	P574232
(2) SAE-24	25 psi / 1.72 bar	Buna-N	Port Machined & Plugged	18" (457.2mm)	P574233
(2) SAE-24	25 psi / 1.72 bar	Buna-N	Port Machined & Plugged	27" (685.8mm)	P574234
(2) 1-1/2" SAE 4 Bolt Flange	25 psi / 1.72 bar	Buna-N	Port Machined & Plugged	18" (457.2mm)	P574235
(1) 1-1/2" SAE 4 Bolt Flange	50 psi / 3.45 bar	Buna-N	Port Machined & Plugged	18" (457.2mm)	P574236
(1) 1-1/2" SAE 4 Bolt Flange	50 psi / 3.45 bar	Buna-N	Port Machined & Plugged	27" (685.8mm)	P574237
(2) SAE-24	50 psi / 3.45 bar	Buna-N	Port Machined & Plugged	18" (457.2mm)	P575922

Indicator Choices

Indicator Pressure Setting	Connector Style	Donaldson Part No.
Visual Pressure Guages		
25 psi / 172 kPa	NA	X011059
50 psi / 345 kPa	NA	X011060
Electrical Service Indicator		
18 psi / 124 kPa	Hirschman	X011061
35 psi / 241 kPa	Hirschman	X011064
18 psi / 124 kPa	Brad Harrison	X011065
35 psi / 241 kPa	Brad Harrison	X011066

Head/Bowl/Housing Seal Kits

Donaldson Part No.	Material
X011140	Buna
X011141	Viton