



TWIST-SET POSITION INDICATOR

EXD

DATA SHEET: EXPLOSION PROOF SWITCH BOX EExd IIB T6

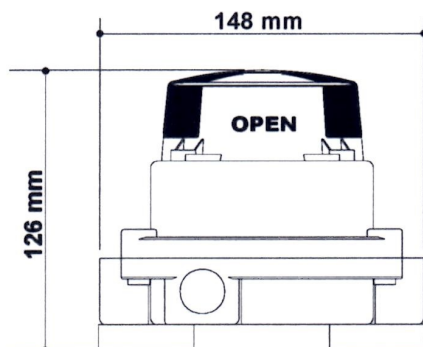

HOUSING:

Materials: Lid & body - Aluminium LM 24
Bearing - Bronze
Shaft - Stainless Steel

Electrical Entries: 2 x M20 (PG 13.5 or 1/2" NPT)
Optional 3 gland entries

Mounting: VDI/VDE3845 (NAMUR)

Enclosure: IP 67

Certified To: EEx d IIB T6

Certificate No: Sira 02ATEX1193

SWITCHES:

Type: Single Pole Double Throw

Rating: 250 Volts 10 Amps

Temperature: -20°C to 80°C

Contacts: Gold Plated


OPTIONS:

Model No:

TS EXD V3-2	2 Limit switches with solenoid terminals
TS EXD V3-4	4 Limit switches with solenoid terminals
TS EXD POT	1 KOHM Potenciometer
TS EXD POT-2	1 KOHM Potenciometer with 2 switches
TS EXD LINEAR	2 Switches set to any angle 0 - 90 degrees.

WIRING DIAGRAM:

COM	BLUE
N/O	RED
N/C	BLACK
COM	BLUE
N/O	RED
N/C	BLACK

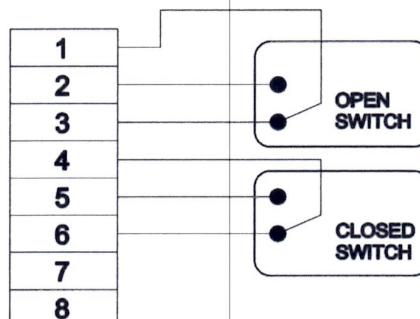

TWIST-SET

DRW NO.:
SOL - B

DATE:

ALL RIGHTS RESERVED ©