

EH40 SERIES

1/4 - 1/2" PIPE SIZE


7




Features:

The EH40 is a 2-way, unidirectional, full port solenoid valve that is great for a wide range of fluids and gases. This pilot operated valve can be used to control the flow of media such as high pressure air, water, natural gas, hydrogen, nitrogen, and other gases or light liquids compatible with materials of construction. Available in both 1/4" (EH40-04) and 1/2" (EH40-08) sizes, the EH40 is the workhorse of our collection and offers a cartridge design that alleviates your demanding maintenance requirements. The EH40 requires 50 PSIG minimum pressure differential between inlet and outlet for operation. The design is optimal for pressures of 50 to 10,000 PSIG. The Normally Closed DC powered EH40 valves must be mounted upright and vertical, while all other EH40 valves can be universally mounted. **Filters are recommended for all applications.**

Dimensions

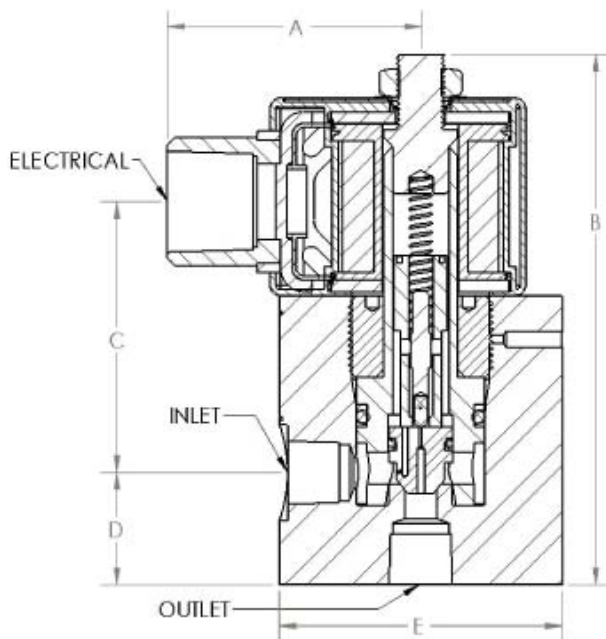

Normally Closed

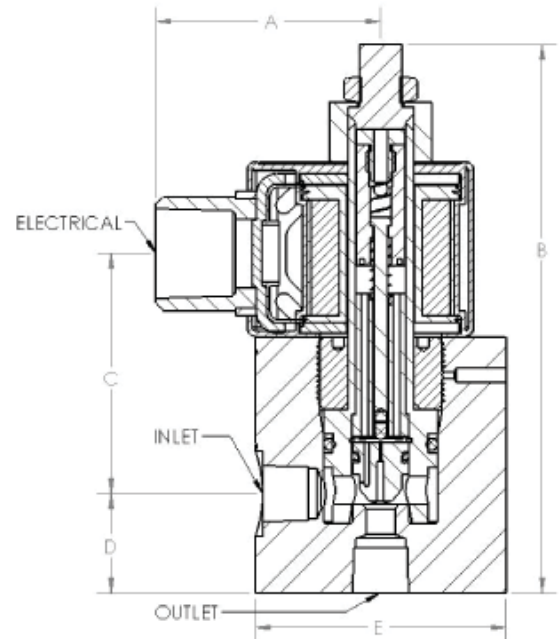

Normally Open

	Inlet/ Outlet	Electrical	Ship Weights (lbs.)	Reference Dimensions (inches)				
				A	B	C	D	E
EH40-04 Normally Closed	¼" NPT	½" NPT Conduit	2.85	2.0	4.1	2.1	0.9	ø 2.20
EH40-04 Normally Open			3.10	2.0	4.8	2.1	0.9	ø 2.20
EH40-08 Normally Closed	½" NPT		6.05	2.0	4.7	2.2	1.3	ø 2.95
EH40-08 Normally Open			6.04	2.0	5.4	2.2	1.3	ø 2.95

EH40 SERIES















1/4 - 1/2" PIPE SIZE

8




How To Order

Base Model Number	Connection Size	AC/DC Voltage and Hertz	Suffix Option Field (s)																																				
EH40	<table><tr><td>04</td><td>¼"</td></tr><tr><td>08</td><td>½"</td></tr></table>	04	¼"	08	½"	<table><tr><td>A024</td><td>24 / 60</td></tr><tr><td>A120</td><td>120 / 60</td></tr><tr><td>A240</td><td>240 / 60</td></tr><tr><td>D012</td><td>12 DC</td></tr><tr><td>D024</td><td>24 DC</td></tr><tr><td>D120</td><td>120 DC</td></tr></table>	A024	24 / 60	A120	120 / 60	A240	240 / 60	D012	12 DC	D024	24 DC	D120	120 DC	<table><tr><td>DN</td><td>Din Connector (Not Explosion Proof)</td></tr><tr><td>GS</td><td>General Service (Not Explosion Proof)</td></tr><tr><td>HY</td><td>Hydrogen Service (Helium leak test)</td></tr><tr><td>NO</td><td>Normally Open</td></tr><tr><td>OX</td><td>Oxygen Clean</td></tr><tr><td>TC</td><td>Tube Connector</td></tr><tr><td>T5</td><td>Class 5 Leakage Test</td></tr><tr><td>XP</td><td>22 Watt Coil (Higher Pressure)</td></tr><tr><td>S4</td><td>SAE J1926 Size "4" Connection</td></tr><tr><td>S8</td><td>SAE J1926 Size "8" Connection</td></tr></table>	DN	Din Connector (Not Explosion Proof)	GS	General Service (Not Explosion Proof)	HY	Hydrogen Service (Helium leak test)	NO	Normally Open	OX	Oxygen Clean	TC	Tube Connector	T5	Class 5 Leakage Test	XP	22 Watt Coil (Higher Pressure)	S4	SAE J1926 Size "4" Connection	S8	SAE J1926 Size "8" Connection
04	¼"																																						
08	½"																																						
A024	24 / 60																																						
A120	120 / 60																																						
A240	240 / 60																																						
D012	12 DC																																						
D024	24 DC																																						
D120	120 DC																																						
DN	Din Connector (Not Explosion Proof)																																						
GS	General Service (Not Explosion Proof)																																						
HY	Hydrogen Service (Helium leak test)																																						
NO	Normally Open																																						
OX	Oxygen Clean																																						
TC	Tube Connector																																						
T5	Class 5 Leakage Test																																						
XP	22 Watt Coil (Higher Pressure)																																						
S4	SAE J1926 Size "4" Connection																																						
S8	SAE J1926 Size "8" Connection																																						

Possible EH40 Options & Add-Ons

							
72" Lead Length	Din Connector	Screw Terminal	1/4 Tab (spade)	General Service	Hydrogen Service	Normally Open	Oxygen Clean
							
SAE Port	Tube Connector	Class V Leakage Testing	Stainless Steel Tags	Viton O-Rings	22 W Coil		

The following are standard on the EH40:

		
Explosion Proof	Stainless Steel Valve Body	NEMA 4X

Certifications



CRN - Canadian Registration Number

EH40 SERIES

1/4 - 1/2" PIPE SIZE

9

Construction

Valve Body:	316 SS
Piston:	PEEK®
O Ring (Standard):	Buna-N (-50° to 225°F)
O Ring (Optional):	Viton (0° to 400°F)
Piston Rings:	302 SS / PTFE / Buna / Viton
Cartridge:	316 SS & 430 SS
Pilot / Seal:	303 SS / PTFE
Spring:	302 SS
Plunger:	430 SS
Bonnet Retainer:	430 SS

*Consult Sales for maximum allowable inlet pressures for Fluid Temps Exceeding 300°F.

Pressure

Maximum pressures shown are measured in PSIG

	1/4" Pipe Size	1/2" Pipe Size
Normally Closed AC Voltage (Standard):	7,500	7,500
Normally Closed AC Voltage (Higher Wattage):	10,000	10,000
Normally Closed DC Voltage (Standard):	3,500	3,600
Normally Closed DC Voltage (Higher Wattage):	10,000	7,200
Normally Open AC Voltage:	5,500	6,500
Normally Open DC Voltage (Higher Wattage):	5,500	6,200
Minimum Required Pressure Differential:	50	50

Flow

	1/4" Pipe Size	1/2" Pipe Size
C _v	1.1	4.5

Electrical (Coil)

	Standard	High Wattage
Power:	10 Watts	22 Watts
AC Inrush:	1 amp @ 120V AC	2.5 amp @ 120V AC
AC Holding:	0.1 amp @ 120V AC	0.2 amp @ 120V AC
Insulation:	Class "F"	Class "H"
Duty:	Continuous	Continuous
Connection:	1/2" NPT, 18" Leads	1/2" NPT, 18" Leads
Enclosure		
Explosion Proof (Standard):	NEMA 3, 3S, 4, 4X, 7, 9	NEMA 3, 3S, 4, 4X, 7, 9
General Service:	NEMA 1, 2, 3, 3S, 4, 4X	NEMA 1, 2, 3, 3S, 4, 4X

Possible Media



General Gases
and Liquids



Fuels &
Light Oils



Flammable
Gases



Hydrogen



Oxygen



Corrosives



Sea & Salt
Water



Viscous
Liquids



Steam



Cryogenics

(856) 829-4580
info@magnatrol.com
www.clarkcooper.com

CLARK COOPER
SPECIALIZING IN ADVANCED APPLICATIONS