



Matière : Fonte

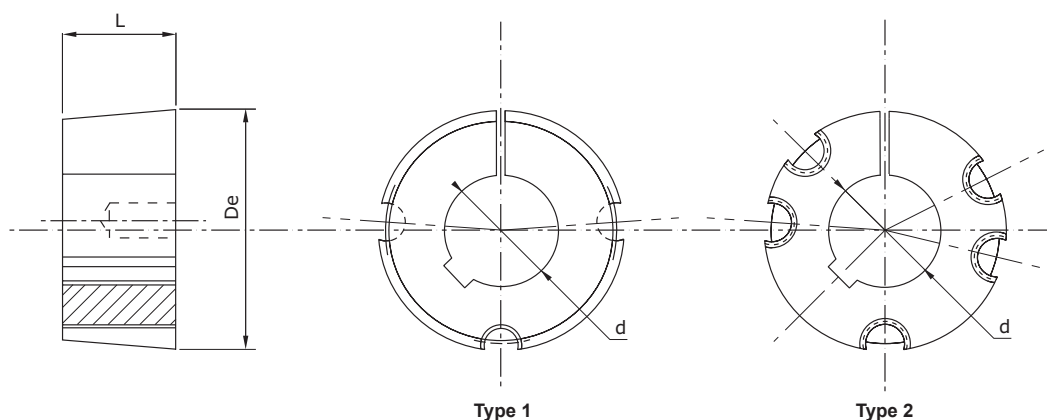


Référence	Alésage en mm (d)	De	L	VIS	Type	Couple Trans. (Nm)	Couple serrage (Nm)	Kg
MA1008A..	9-10-11-12-14-16-18-19-20-22-24-25	35.0	22.3	1/4" x 1/2"	1	136	5.6	0.16
MA1108A..	28.20 9-10-11-12-14-16-18-19-20-22-24-25-28Δ	38.0	22.3	1/4" x 1/2"	1	147	5.6	0.16
MA1210A..	30.25 11-12-14-16-18-19-20-22-24-25-28-30-32	47.5	25.4	3/8" x 5/8"	1	407	19.6	0.32
MA1215A..	30.40 14-19-20-24-25-28	47.5	38.1	3/8" x 5/8"	1	407	19.6	0.50
MA1610A..	40.25 14-16-18-19-20-22-24-25-28-30-32-35-38-40Δ-42Δ	57.0	25.4	3/8" x 5/8"	1	486	19.6	0.50
MA1615A..	40.40 14-16-18-19-20-22-24-25-28-30-32-35-38-40Δ-42Δ	57.0	38.1	3/8" x 5/8"	1	486	19.6	0.60
MA2012A..	50.30 14-16-18-19-20-22-24-25-28-30-32-35-38-40-42-45-48-50Δ	70.0	31.8	7/16" x 7/8"	1	808	30.4	0.75
MA2517A..	65.45 16-18-19-20-22-24-25-28-30-32-35-38-40-42-45-48-50-55-60	85.5	44.5	1/2" x 1"	1	1310	48.0	1.06
MA3020A..	75.50 25-28-30-32-35-38-40-42-45-48-50-55-60-65-70-75	108.0	50.8	5/8" x 1" 1/4	1	2710	90.0	2.50
MA3030A..	75.75 35-38-40-42-45-48-50-55-60-65-70-75	108.0	76.2	5/8" x 1" 1/2	1	2710	90.0	3.75
MA3525A..	35-38-40-42-45-48-50-55-60-65-70-75-80	127.0	64.9	1/2" x 1" 1/2	2	5060	113.0	4.20
MA3535A..	90.90 35-38-40-42-45-48-50-55-60-65-70-75-80-85-90Δ	127.0	88.9	1/2" x 1" 1/2	2	5060	113.0	5.13
MA4030A..	40-42-45-48-50-55-60-65-70-75-80-85-90-100Δ	146.0	76.2	5/8" x 1" 1/2	2	8740	169.0	6.75
MA4040A..	100.100 40-42-45-48-50-55-60-65-70-75-80-85-90-100Δ	146.0	101.6	5/8" x 1" 3/4	2	8740	169.0	7.68
MA4545A..	115.115 55-60-65-70-75-80-85-90-100Δ-115Δ-120Δ	162.0	115.0	3/4" x 2"	2	12400	192.0	10.56
MA5050A..	125.125 70-75-80-85-90-100-105-110-115-120-125	177.6	127.0	7/8" x 2" 1/4	2	12400	272.0	15.17

.. Diamètre d'alésage

Δ Clavette basse

Dimensions des rainures de clavettes standards

d	a	JS9	F
de 10 à 12	4		D + 1,8
" 12 " 17	5	± 0,015	D + 2,3
" 17 " 22	6		D + 2,8
" 22 " 30	8	± 0,018	D + 3,3
" 30 " 38	10		D + 3,3
" 38 " 44	12		D + 3,3
" 44 " 50	14	± 0,021	D + 3,8
" 50 " 58	16		D + 4,3
" 58 " 65	18		D + 4,4
" 65 " 75	20		D + 4,9
" 75 " 85	22	± 0,026	D + 5,4
" 85 " 95	25		D + 5,4
" 95 " 110	28		D + 6,4
" 110 " 130	32	± 0,031	D + 7,4



Dimensions des rainures de clavettes basses Δ

d	a	F
28	8	D + 1,3
35	10	D + 1,3
40 / 42	12	D + 1,3
50	14	D + 2,8
65	18	D + 2,8
90	25	D + 3,4
100	28	D + 5,4