

A20P-1EQ□□

□ : Lens Color
 Q□ : Lamp
 E : Standard
 1 : Flush
 A20P : Pilot Light

A:Amber
 G:Green
 R:Red
 S:Blue
 W:White
 Y:Yellow
 PW:Pure White


0:Without Lamp
 LED
 2:6V AC/DC
 3:12V AC/DC
 4:24V AC/DC
 H:110V AC/DC
 M3:230/240V AC/DC
 Incandescent Lamp
 5:6V AC/DC
 6:12V AC/DC
 7:24V AC/DC




Product Specifications

Rated insulation voltage : 250V
 Max.Flash Energy : 2.6W
 Insulation resistance : 100MΩ
 Dielectric strength : 2000V AC ,1 minute
 Panel thickness : 0.8mm ~ 6mm
 Degree of protection : IP 65
 Storage temperature : -45°C to +85°C
 Operating temperature : -25°C to +55°C

Screw Type Pilot Light

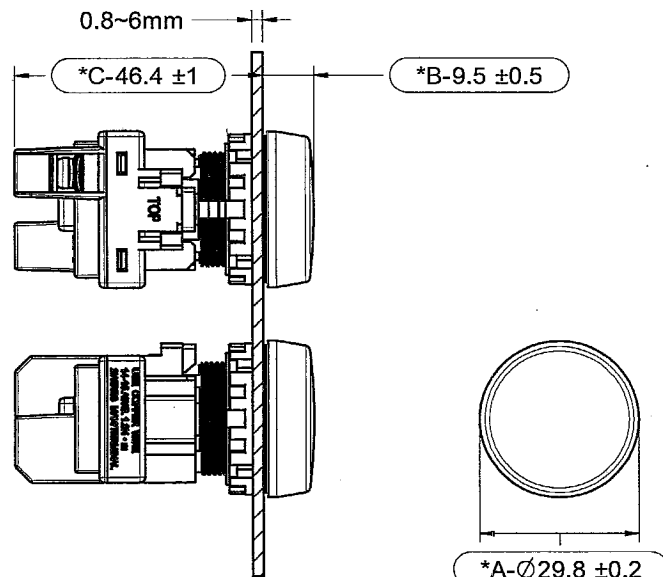

Hole Dia

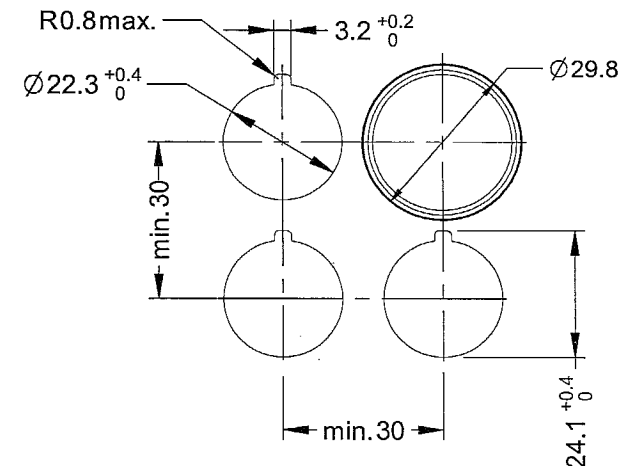

定案
 C
 REV.

文件管制
 MAY 06, 2014
 文管中心

DECA®SwitchLab Inc.

DESIGN Jim	CHECK Virginia	APPROVE G. elia
DATE 2014/05/06	DATE 2014/05/06	DATE 2014/05/06

PART NAME	UNIT	SCALE
Pilot Light (Flush)	MM	0.7 : 1
DRAWING NO.		SHEET
A20P-1EQxx		1 / 1