

Electric Products

MCB / MC&TOR / MMS / MCCB /
ACB / FDB / SMDB / VCB



LSIS

Miniature Circuit Breakers

Page 4

- 1, 2, 3 and 4 pole series up to 125AF
- B, C and D Characteristics

Residual Current Circuit Breakers

Page 6

- 2 and 4 pole series up to 100AF
- Sensitivity up to 300mA
- Overcurrent protection type available

Surge Protective Device

Page 8



Contactors & Overload Relays

Page 16

Metasol series

- 3 and 4 pole series up to 2650AF Mini-contactors available
- AC/DC common use coil from 150AF
- Thermal (Bimetallic) and electronic type overload relays are available
- CE marked and UL approved

Mini Contactors

Page 24

Digital Motor Protection Relay

Page 25

Manual Motor Starters

Page 26



Susol/Metasol series

- 2, 3 and 4 pole series up to 1600AF
- Rated ambient temperature at 40°C calibrated for 50°C available
- CE marked according to IEC standard and UL approved MCCBs are also available.

Metasol series

- 2, 3 and 4 pole series up to 1200AF
- CE marked according to IEC standard



Susol/Metasol series

- 65, 85 and 150kA breaking capacity
- High functional digital trip relays
- CE marked and Marine classification




Susol series



Miniature Circuit Breakers





1, 2, 3 and 4pole series up to 125AF [IEC 60898, IEC 60947-2]

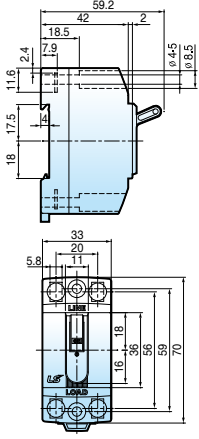

Type		MCB						
		BKN	BKN-c	BKN-b		BS32c	BS32d	
Protection		Overload and short circuit		Overload and short circuit		Overload and short circuit		
Rated current		1, 2, 3, 4, 6, 10, 13, 16, 20, 25, 32, 40, 50, 63A		1, 2, 3, 4, 6, 10, 16, 20, 25, 32, 40, 50, 63A		6, 10, 15, 20, 30A	10, 15, 20, 30A	
Characteristic		B, C, D curve	B, C, curve	B, C, D curve		-	-	
Poles		1P, 1P+N, 2P, 3P, 3P+N, 4P	1P, 2P, 3P, 4P	1P, 1P+N, 2P, 3P, 3P+N, 4P		-	-	
Breaking capacity		1pole	2~4pole	1pole	2~4pole	2pole		
		1A ~ 63A 6kA at 230/400VAC (NF: 4.5kA)	1A ~ 63A 6kA at 400VAC	1A ~ 63A 10kA at 240/415VAC	1A ~ 63A 10kA at 415VAC	1.5kA	2.5kA	
Standard		IEC 60898		IEC 60898, IEC 60947-2		IEC 60898, KS		
Approval		CCC, SABS, SEMKO CB	SEMKO CB	KEMA CB, SABS, CE, NF*		CCC	-	
Type of trip		Thermal magnetic release		Thermal magnetic release		-	-	
Endurance	Electrical	4,000 operations		4,000 operations		4,000 operations		
	Mechanical	10,000 operations		10,000 operations		10,000 operations		
Mount		On 35mm DIN rail		On 35mm DIN rail		DIN rail / Screw		
Width		17.8mm per pole		17.8mm per pole		33mm per pole		
Terminal		Lug type (Cable up to 25mm²)	Dual type (Lug & Screw)	Lug type (Cable up to 25mm²)		Screw clamp type (Cable up to 5.5mm²)		
Auxiliary switch, AX & AL Optional		 1 changeover contact 6A at 240VAC, 3A at 415VAC (AX) 6A at 230VAC, 3A at 415VAC (AL) 2A at 48VDC, 1A at 125VDC Lug terminal Cable capacity 2.5mm² 9mm wide *Only for BKN		 1 changeover contact 6A at 240VAC, 3A at 415VAC (AX/ AL) 6A at 24VDC, 2A at 48VDC, 1A at 130VDC Lug terminal Cable capacity 0.75~2.5mm² 8.8mm wide				
Dimension								
Remarks		-		-		-		

* NF : Breaking capacity 6kA

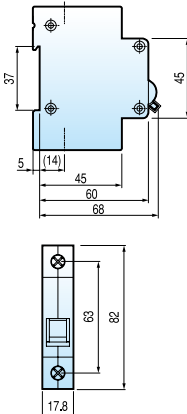





	MCB						
	BKH		BKP	BF-a	BF-c	BFN	
	Overload and short circuit		Overload and short circuit	Overload and short circuit		Overload and short circuit	
	63, 80, 100, 125A		3, 6, 10, 16, 20, 25, 32A	10~100A		5, 10, 15, 20, 30, 40, 50A	
	C, D curve		B, C, D curve	-		-	
	1P, 2P, 3P, 3P+N, 4P		1P+N	1p, 2p, 3p		1p, 2p, 3p	
	1pole	2~4pole	-	-		1pole	2~3pole
	63A ~ 125A 10kA at 230VAC	63A ~ 125A 10kA at 400VAC	3A ~ 32A 4.5kA at 230VAC (NF: 3kA)	10A~100A 10kA at 240VAC 2.5kA at 415VAC	10A~100A 5kA at 240VAC 2.5kA at 415VAC	5A~50A 10kA at 230VAC	5A~50A 10kA at 400VAC
	IEC 60947-2		IEC 60898	IEC 60947-2		IEC 60947-2	
	CCC, SEMKO CB, SABS, CE		CCC, SEMKO CB, NF, SABS, CE	-		SEMKO CB, CE	
	Thermal magnetic release		Thermal magnetic release	Thermal magnetic release		Thermal magnetic release	
	1,500 operations		4,000 operations	1,500 operations		1,500 operations	
	10,000 operations		10,000 operations	10,000 operations		10,000 operations	
	On 35mm DIN rail		On 35mm DIN rail	Holder mounting (Bolt on with fixing brackets)		Plug-in	
	27mm per pole		17.8mm	25mm per pole		25mm per pole	
	Lug type (Cable up to 50mm²)		Lug type (Cable up to 10mm²)	Clamp type		Lug type (14-6 AWG.)	
							
	IEC 60947-2 (SABS)		-	-		-	

Residual Current Circuit Breakers

2 and 4 pole series up to 63AF

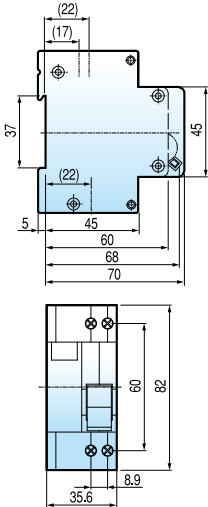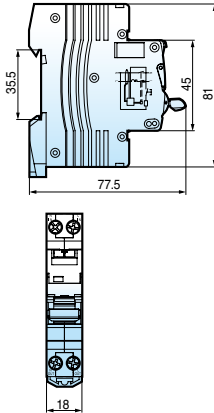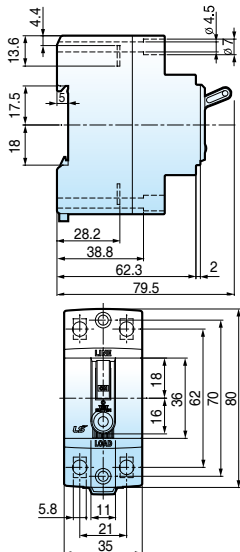

Type	RCBO					
	RKP	RKS	RKS-b	RKC	32KGRc	32KGRd
Protection	Ground fault and overcurrent	Ground fault and overcurrent		Ground fault and overcurrent	Ground fault and overcurrent	
Rated current	3 (C, D curve), 6, 10, 16, 20, 25, 32A (B, C, D curve)	6, 10, 16, 20, 25, 32A (40, 50A) * (B, C curve)		6, 10, 16, 20, 25, 32A (B, C curve)	15, 20, 30A	
Rated residual current	-	-		-	-	
Operating, $I_{\Delta n}$	30, 100, 300mA (Non-adjustable)	30, 100mA (Non-adjustable)		10, 30mA (Non-adjustable)	15, 30mA (Non-adjustable)	
Non-operating, $I_{\Delta no}$	$0.5I_{\Delta n}$	$0.5I_{\Delta n}$		$0.5I_{\Delta n}$	$0.5I_{\Delta n}$	
Poles	1P+N	1P+N		1P+N	2pole	
Rated voltage	230VAC	230VAC 240VAC		240VAC	110/240VAC	
Residual current off-time	≤ 0.1 sec.	≤ 0.3 sec.		≤ 0.01 sec	≤ 0.03 sec	
Standard	IEC 61009	IEC 61009		IEC 61009	IEC 61009, KS	
Approval	CCC, SEMKO CB, CE, SABS	SEMKO CB, CE, SABS	SEMKO CB, CE	BV CB	CCC	
Type of trip	-	-		-	-	
Ground fault	Electronic	Electronic		Electronic	Electronic	
Overcurrent	Thermal-magnetic	Thermal-magnetic		Thermal-magnetic	Bimetallic	
Breaking capacity	4.5kA	10kA		6kA (32A 4.5kA)	1.5kA 2.5kA	
Conditional short circuit capacity	-	-		-	-	
Endurance Electrical	4,000 operations	4,000 operations		4,000 operations	4,000 operations	
Mechanical	10,000 operations	10,000 operations		10,000 operations	10,000 operations	
Mount	On 35mm DIN rail	On 35mm DIN rail		On 35mm DIN rail	On 35mm DIN rail / Screw	
Width	35.6mm	18mm		18mm	35mm	
Terminal	Lug type (Cable up to 10mm ²)	Lug type (Cable up to 10mm ²)		Lug type (Cable up to 10mm ²)	Screw clamp type (Cable up to 5.5mm ²)	
Type of operation	AC	AC		A/AC	-	
Dimension						

* 40, 50A are available only for RKS-b

7

Surge Protective Device

BK Series

Din-rail type

Product description

The BK Series AC/DIN type surge protect protects a 50/60Hz electric system from surge voltages. Also, the system allows replacement of the protective element (MOV), ensuring convenience and economy. However, as only the protective module is provided, other components should be added when the system is installed in accordance with the site condition. When the protective device is activated (in an anomaly or an accident), the red lever in the status indicator protrudes.



Product rating <Uc: 385V>

Item			AC Type					
			BK05S-T3	BK10S-T2	BK20S-T2	BK30S-T2	BK40S-T2	BK12S-T1 Note9)
No. of poles [Pole]			2, 4P	1, 1+N, 2, 3, 3+N, 4P				
Rated voltages Un [V]			230/440V					
Max. continued-operation voltage	Uc [V]	-	385	385	385	385	385	385
		N-PE		255	255	255	255	255
Voltage protection level	Up [kV]	-	≤0.8	≤1.5	≤1.8	≤2.0	≤2.5	≤2.5
		N-PE	-	≤1.0	≤1.2	≤1.5	≤2.0	≤2.5
	Up [kV] 	-	≤2.0	≤1.5	≤1.8	-	≤2.5	-
		N-PE	-	≤2.5	≤2.5	-	≤3.5	-
Nominal discharge current In [kA]				10	20	30	40	-
Max. discharge current Imax [kA]			-	20	40	60	80	-
Impulse current Iimp [kA]			-	-	-	-	-	12.5(10/350)
Open circuit voltage Uoc [kV]			10	-	-	-	-	-
Grades Test class			Class III	Class II				Class I (Built-in type)
Reaction time			< 25ns					
Status indication Note2)			Have Status indication					
Operating temperature range			-40℃~80℃					
Cross-sectional area of the connecting wires			6~16mm ²	6~32mm ²				16~32mm ²
Accessories			AL Note9)					-
Standard			IEC 61643-11 / KS C IEC 61643-11 / UL1449					
Certification Note6)			CE, UL, KS, S	CE, UL, KS, S	CE, UL, KS, S	CE, UL	CE, UL, KS, S	CE

Note)

- When the protective device is activated (in an anomaly or an accident) in products with Class II and III indication features, the red lever in the status indicator protrudes.
- With a product with Class I indication feature, a green light will turn on when the protective device is in a normal condition. The green light will go off when the protective device is activated (for an anomaly or an accident.)
- The AL contact accessories are not sole separately. You need to choose these accessories when you place your order for the product. Please be mindful of this fact when you place your order.
- The Class I products are integrated with the MOVs, which cannot be detached.
- Depending on the authentication will be separated by CE / KS or UL / S separate products. Please be mindful of this fact when you place your order.

Product description

The BK Series AC/DIN type surge protect protects a 50/60Hz electric system from surge voltages. Also, the system allows replacement of the protective element (MOV), ensuring convenience and economy. However, as only the protective module is provided, other components should be added when the system is installed in accordance with the site condition. When the protective device is activated (in an anomaly or an accident), the red lever in the status indicator protrudes.



Product rating <Uc: 460V>

Item			AC Type			
			BK10S-T2	BK20S-T2	BK30S-T2	BK40S-T2
No. of poles	[Pole]		1, 1+N, 2, 3, 3+N, 4P			
Rated voltages	Un [V]		254/440V			
Max. continued-operation voltage	Uc [V]	-	460	460	460	460
		N-PE	255	255	255	255
Voltage protection level	Up [kV]	-	≤1.5	≤2.0	≤2.2	≤2.5
		N-PE	≤1.0	≤1.2	≤1.5	≤2.0
	Up [kV] ^(Note1)	-	-	-	-	-
		N-PE	-	-	-	-
Nominal discharge current	In [kA]		10	20	30	40
Max. discharge current	Imax [kA]		20	40	60	80
Impulse current	Iimp [kA]		-	-	-	-
Open circuit voltage	Uoc [kV]		-	-	-	-
Grades	Test class		Class II			
Reaction time			< 25ns			
Status indication ^(Note2)			Have Status indication			
Operating temperature range			-40℃~80℃			
Cross-sectional area of the connecting wires			6~32mm ²			
Accessories			AL ^(Note3)			
Standard			IEC 61643-11, UL1449			
Certification ^(Note4)			CE, S	CE, S, UL	CE, S, UL	CE, S, UL

Note)

- When the protective device is activated (in an anomaly or an accident) in products with Class II and III indication features, the red lever in the status indicator protrudes.
- With a product with Class I indication feature, a green light will turn on when the protective device is in a normal condition. The green light will go off when the protective device is activated (for an anomaly or an accident.)
- The AL contact accessories are not sole separately. You need to choose these accessories when you place your order for the product. Please be mindful of this fact when you place your order.
- Depending on the authentication will be separated by CE / KS or UL / S separate products. Please be mindful of this fact when you place your order.



Surge Protective Device

BK Series

DC Din-rail type

Product description

The BK Series DC/DIN type surge protect protects a DC electric system from surge voltages. Also, the system allows replacement of the protective element (MOV), ensuring convenience and economy. However, as only the protective module is provided, other components should be added when the system is installed in accordance with the site condition. When the protective device is in a normal condition, the indication display will be green. The display will turn black when the protective device is activated (for an anomaly or an accident.)



Product rating

Item		DC Type			
		BK20S-DC110	BK20S-DC600	BK20S-DC1000	BK20S-DC1500
No. of poles	[Pole]	2P	3P		
Rated voltages	Un [V]	DC110	DC600	DC1000	DC1500
Max. continued-operation voltage	Uc [V]	DC220	DC700	DC1200	DC1500
Voltage protection level	Up [kV]	≤1.0	≤2.5	≤3.9	≤4.5
Nominal discharge current	In [kA]	20	20	20	20
Max. discharge current	I _{max} [kA]	40	40	40	40
Impulse current	I _{imp} [kA]	-	-	-	-
Grades	Test Class	Class II			
Reaction time		< 25ns			
Status indication		Have Status indication			
Operating temperature range		-40℃~80℃			
Cross-sectional area of the connecting wires		6mm ² or more			
Accessories		AL (Note1)			
Standard		IEC 61643-11 / UL1449			
Certification		CE	CE, UL	CE, UL	CE
SPD Disconnector	MCCB	TD100 2P 32A	TD100 3P 32A	TD100 4P 32A	TSD250N/H 4P 63A (Under development)
	MCB	BK63H-DC 2P 40A	BK63H-DC 3P 40A	BK63H-DC 4P 40A	-

Note) 1. The AL contact accessories are not sole separately.

You need to choose these accessories when you place your order for the product.

Please be mindful of this fact when you place your order.



SD Series

SPD Disconnecter


Product description

SPD Disconnecter is a device that separates the SPD from the system during SPD failure and maintenance work. It has a trip function that can detect and cut off leakage current caused by SPD deterioration (varistor burnout, etc.) and has a high surge resistance to prevent the unintended trip operation of the Disconnecter.



Product rating

Item		SD10-T2	SD20-T2	SD30-T2	SD40-T2	SD13-T1
Grades	Test Class	Class II, III		Class II		Class I
No. of poles				1,2,3,4 Pole		
Nominal discharge current	I_n [kA]	10kA	20kA	30kA	40kA	-
Max. discharge current	I_{max} [kA]	20kA	40kA	60kA	80kA	-
Impulse current	I_{imp} [kA]	-	-	-	-	12.5kA
Short circuit current	I_{sc} [kA]			25kA		
Rated voltages	U_e [V]			230 / 400V		
Rated insulation voltage	U_i [V]			500V		
Voltage protection level	U_p [kV]	0.25kV	0.4kV	0.5kV	0.7kV	0.3kV
Frequency				50 / 60Hz		
Min. delay current	I_t			3A (<10s)		
Min. instantaneous current	I_i			5A(>0.1s), 10A(<0.1s)		
Protection degree				IP20		
Max. connection wire range				25mm ²		
AL connection wire range				1.5mm ²		
Operating temperature range				-25°C~60°C		
Ambient humidity				20%~90%		
Din-Rail				EN60715 (35mm)		

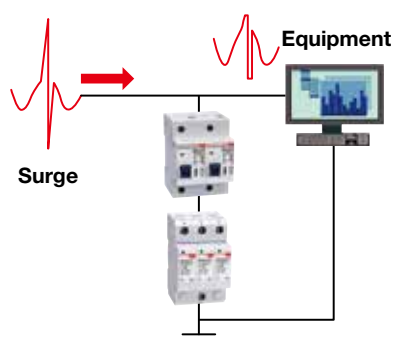

- Convenient SPD replacement
- High surge resistance
- Leakage current detection
- Prevent malfunctions in case of short circuit
- Easy installation using DIN rail

* AL available for SD20-T2 and SD-40T2

Surge Protective Device

SP Series

Box type

Product description

The SP series surge protective device is applied to the alternating current 50/60Hz, 220V/380V power system and provides the protection from the surge overvoltage of an electric system. Moreover, the protection module, disconnectable device (fuse), and fastened power and ground wires are organized into the all-in-one steel cabinet with convenient installation and stability.

If the protective device is normal, the display becomes green. The display becomes red after operation (abnormal or after an accident).

Product rating

- Single phase 2W+G (SPL)



SPD Type			SPL (AC 110/220V)	SPL (AC 220V)	
			SPL3-20S	SPL2-40S	SPL2-80S
Class			Class III	Class II	
Rated system [Pole]			2W+G	2W+G	
Rated voltage, Un AC [V]			110, 220	220	
Max. continuous operating voltage, Uc AC [V]			275	385	
Voltage protection level, Up [kV]			1.5	2.5	3.0
Operation voltage, Uoc [kV/kA]			20/10	20	40
Nominal discharge current, In (8/20μs) [kA, per mode]			-	40	80
Maximum discharge current, Imax (8/20μs) [kA, per mode]			-	-	-
Response time, tA [ns]			< 5 ns	< 5 ns	
Operating temperature range [°C]			-40 ~ +70°C	-40 ~ +70°C	
Operating frequency [Hz]			50/60 Hz	50/60 Hz	
Mounting on			Screw	Screw	
Operation status indication			Normal operation: Green, Abnormal/After an accident: Red		
Protection degree			IP20	IP20	
Protection mode			L-N, N-PE (G), L-PE (G)	L-N, N-PE (G)	
Ground			TN	TN	
Certification			CE	KS, CE	

Product rating

- Three phase 3W+G (SPT) AC 220V



SPD Type			SPT (AC 220V)			
			SPT2-40S	SPT2-80S	SPT1-120S	SPT1-160S
Class			Class II		Class I, Class II	
Rated system [Pole]			3W+G			
Rated voltage, Un AC [V]			220			
Max. continuous operating voltage, Uc AC [V]			385			
Voltage protection level, Up [kV]			2.5	3.0	2.0	2.0
Nominal discharge current, In (8/20μs) [kA, per mode]			20	40	-	-
Maximum discharge current, Imax (8/20μs) [kA, per mode]			40	80	120	160
Lightning impulse current, Iimp (10/350μs) [kA, per mode]			-	-	6.5	6.5
Response time, tA [ns]			< 5 ns			
Operating temperature range [°C]			-40 ~ +70°C			
Operating frequency [Hz]			50/60 Hz			
Mounting on			Screw			
Operation status indication			Normal operation: Green, Abnormal/After an accident: Red			
Protection degree			IP20			
Protection mode			L-PE (G)			
Ground			TN			
Certification			KS, CE			

* SPT can not be used in Delta wiring grounding system

Product rating

- Three phase 3W+G (SPT) AC 380V



SPD Type			SPT (AC 380V)			
			SPT2-40S	SPT2-80S	SPT1-120S	SPT1-160S
Class			Class II		Class I, Class II	
Rated system [Pole]			3W+G			
Rated voltage, Un AC [V]			380			
Max. continuous operating voltage, Uc AC [V]			385			
Voltage protection level, Up [kV]			2.5	3.0	2.0	2.0
Nominal discharge current, In (8/20μs) [kA, per mode]			20	40	-	-
Maximum discharge current, Imax (8/20μs) [kA, per mode]			40	80	120	160
Lightning impulse current, Iimp (10/350μs) [kA, per mode]			-	-	6.5	6.5
Response time, tA [ns]			< 5 ns			
Operating temperature range [°C]			-40 ~ +70°C			
Operating frequency [Hz]			50/60 Hz			
Mounting on			Screw			
Operation status indication			Normal operation: Green, Abnormal/After an accident: Red			
Protection degree			IP20			
Protection mode			L-PE (G)			
Ground			TN			
Certification			KS, CE			

* SPT can not be used in Delta wiring grounding system

Product rating

- Three phase 3W+G (SPT) AC 440V



SPD Type			SPT (AC 440V)			
			SPT2-40S	SPT2-80S	SPT1-120S	SPT1-160S
Class			Class II		Class I, Class II	
Rated system [Pole]			3W+G			
Rated voltage, Un AC [V]			440			
Max. continuous operating voltage, Uc AC [V]			385			
Voltage protection level, Up [kV]			2.5	3.0	2.0	2.0
Nominal discharge current, In (8/20μs) [kA, per mode]			20	40	-	-
Maximum discharge current, Imax (8/20μs) [kA, per mode]			40	80	120	160
Lightning impulse current, Iimp (10/350μs) [kA, per mode]			-	-	6.5	6.5
Response time, tA [ns]			< 5 ns			
Operating temperature range [°C]			-40 ~ +70°C			
Operating frequency [Hz]			50/60 Hz			
Mounting on			Screw			
Operation status indication			Normal operation: Green, Abnormal/After an accident: Red			
Protection degree			IP20			
Protection mode			L-PE (G)			
Ground			TN			
Certification			KS, CE			

* SPT can not be used in Delta wiring grounding system

Surge Protective Device

SP Series

Box type

Product rating

- Three phase 4W +G (SPY) 127S



SPD Type	SPY (AC 127/220V)				
	SPY2-40S	SPY2-80S	SPY1-120S	SPY1-160S	SPY1-200S *
Class	Class II		Class I, Class II		
Rated system	[Pole]	4W+G			
Rated voltage, Un	AC	[V]	127/220		
Max. continuous operating voltage, Uc	AC	[V]	385		
Voltage protection level, Up	[kV]	2.5	3.0	2.0	2.0
Nominal discharge current, In (8/20μs)	[kA, per mode]	20	40	-	-
Maximum discharge current, Imax (8/20μs)	[kA, per mode]	40	80	120	160
Lightning impulse current, Iimp (10/350μs)	[kA, per mode]	-	-	6.5	6.5
Response time, tA	[ns]	< 5 ns			
Operating temperature range	[°C]	-40 ~ +70°C			
Operating frequency	[Hz]	50/60 Hz			
Mounting on		Screw			
Operation status indication		Normal operation: Green, Abnormal/After an accident: Red			
Protection degree		IP20			
Protection mode		L-N, N-PE (G)			
Ground		TN			
Certification		KS, CE			

* The wiring direction of SPY1-200S is located on the side. (Refer to external dimension)

Product rating

- Three phase 4W+G (SPY) 220S



SPD Type	SPY (AC 220/380V)					
	SPY2-40S	SPY2-80S	SPY1-120S	SPY1-160S	SPY1-200S *	
Class	Class II		Class I, Class II			
Rated system	[Pole]	4W+G				
Rated voltage, Un	AC [V]	220/380				
Max. continuous operating voltage, Uc	AC [V]	385				
Voltage protection level, Up	[kV]	2.5	3.0	2.0	2.0	2.0
Nominal discharge current, In (8/20μs)	[kA, per mode]	20	40	-	-	-
Maximum discharge current, Imax (8/20μs)	[kA, per mode]	40	80	120	160	200
Lightning impulse current, Iimp (10/350μs)	[kA, per mode]	-	-	6.5	6.5	12.5
Response time, tA	[ns]	< 5 ns				
Operating temperature range	[°C]	-40 ~ +70°C				
Operating frequency	[Hz]	50/60 Hz				
Mounting on		Screw				
Operation status indication		Normal operation: Green, Abnormal/After an accident: Red				
Protection degree		IP20				
Protection mode		L-N, N-PE (G)				
Ground		TN				
Certification		KS, CE				

* The wiring direction of SPY1-200S is located on the side. (Refer to external dimension)

Product rating

- limp 12.5kA Class I SPD



SPD Type		SPL1-13/50S	SPT1-13S	SPY1-13/50S
Class		Class I		
Rated system	[Pole]	2W+G	3W+G	4W+G
Rated voltage, U_n	AC [V]	220	380	380/220
Max. continuous operating voltage, U_c	AC [V]	320		
Voltage protection level, U_p	[kV]	L-N : 1.2, N-PE : 1.8	L-N : 1.2, N-PE : 1.8	L-N : 1.2, N-PE : 1.8
Nominal discharge current, I_n (8/20 μ s)	[kA, per mode]	-	-	-
Maximum discharge current, I_{max} (8/20 μ s)	[kA, per mode]	-	-	-
Lightning impulse current, I_{imp} (10/350 μ s)	[kA, per mode]	12.5/50	12.5	12.5/50
Response time, t_A	[ns]	< 5 ns		
Operating temperature range	[°C]	-40 ~ +70°C		
Operating frequency	[Hz]	50/60 Hz		
Mounting on		Screw		
Operation status indication		Normal operation: Green, Abnormal/After an accident: Red		
Protection degree		IP20		
Protection mode		L-N, N-PE (G)	L-PE (G)	L-N, N-PE (G)
Ground		TN/TT/IT		
Certification		KS, CE		

* SPT can not be used in Delta wiring grounding system

Product rating

- limp 25kA Class I SPD



SPD Type		SPL1-25/50S	SPT1-25S	SPY1-25/100S
Class		Class I		
Rated system	[Pole]	2W+G	3W+G	4W+G
Rated voltage, U_n	AC [V]	220	380	380/220
Max. continuous operating voltage, U_c	AC [V]	320		
Voltage protection level, U_p	[kV]	L-N : 1.3, N-PE : 2.0	L-N : 1.3, N-PE : 2.0	L-N : 1.3, N-PE : 2.0
Nominal discharge current, I_n (8/20 μ s)	[kA, per mode]	-	-	-
Maximum discharge current, I_{max} (8/20 μ s)	[kA, per mode]	-	-	-
Lightning impulse current, I_{imp} (10/350 μ s)	[kA, per mode]	25/50	25	25/100
Response time, t_A	[ns]	< 5 ns		
Operating temperature range	[°C]	-40 ~ +70°C		
Operating frequency	[Hz]	50/60 Hz		
Mounting on		Screw		
Operation status indication		Normal operation: Green, Abnormal/After an accident: Red		
Protection degree		IP20		
Protection mode		N-PE (G)	L-PE (G)	L-N, N-PE (G)
Ground		TN/TT/IT		
Certification		KS, CE		

* SPT can not be used in Delta wiring grounding system

Contactors & Overload relays

Metasol MC 3P 18 to 150A

MC type Magnetic Contactors



Frame size			18AF				22AF			
Type			MC-6a	MC-9a	MC-12a	MC-18a	MC-9b	MC-12b	MC-18b	MC-22b
	Screws clamp terminals		●	●	●	●	●	●	●	●
	Lug clamp terminals		-	-	-	-	-	-	-	-
Number of poles			3pole				3pole			
Rated operational voltage, Ue			690V				690V			
Rated insulation voltage, Ui			690V				690V			
Rated frequency			50/60Hz				50/60Hz			
Rated impulse withstand voltage, Uimp			6kV				6kV			
Maximum operating rate in operating cycles per hour(AC3)			1800 operations per hour				1800 operations per hour			
Durability	Mechanical		15 mil. operations				15 mil. operations			
	Electrical		2.5 mil. operations				2.5 mil. operations			
Current and power	AC-1, Thermal current	A	25	25	25	32	25	27	32	45
	AC-3, 200/240V	kW	2.2	2.5	3.5	4.5	2.5	3.5	4.5	5.5
		A	9	11	13	18	11	13	18	22
	380/440V	kW	3	4	5.5	7.5	4	5.5	7.5	11
		A	7	9	12	18	9	12	18	22
	500/550V	kW	3	4	7.5	7.5	4	7.5	7.5	15
		A	6	7	12	13	7	12	13	20
	690V	kW	3	4	7.5	7.5	4	7.5	7.5	15
		A	4	5	9	9	6	9	9	18
	1000V	kW	-	-	-	-	-	-	-	-
		A	-	-	-	-	-	-	-	-
		A	-	-	-	-	-	-	-	-
Rated Short-time withstand current (IEC 60947)	1s	A	210	250	280	300	250	280	300	400
	10s	A	105	110	120	130	110	120	154	186
	30s	A	70	70	80	85	70	80	100	130
	1min	A	61	61	61	70	61	61	84	90
	3min	A	40	45	47	50	45	50	60	60
	10min	A	30	30	30	40	30	30	40	50
	≥15min	A	25	26	28	30	26	28	30	45
UL rating (50/60Hz)	Continuous current	A	25	25	25	32	25	25	40	40
	Single phase 110~120V	HP	0.5	0.5	0.75	1	0.5	0.75	1	2
	220~240V	HP	1.5	1.5	2	3	1.5	2	3	3
	200~208V	HP	2	2	3	7.5	2	3	7.5	7.5
	Three phase 220~240V	HP	3	3	5	7.5	3	5	7.5	10
	440~480V	HP	5	5	7.5	10	5	7.5	10	15
	550~600V	HP	7.5	7.5	10	15	7.5	10	15	20
Size and weight	NEMA size		00	00	0	1	00	0	1	
	AC control	Weight	0.33				0.34			
	DC control	Size(W×H×D)	45×73.5×80.4				45×73.5×87.4			
	DC control	Weight	0.4				0.41			
Auxiliary(standard)		Size(W×H×D)	45×73.5×96.6				45×73.5×103.6			
			1NO or 1NC				1NO1NC			
Auxiliary	Front mount		UA-1				UA-1			
	Side mount		UA-2, UA-4				UA-2, UA-4			

Note) Minimum conduct current of Auxiliary contactor is DC 17V 5mA.

MT type Thermal Overload Relays



Type			MT-12/□	MT-32/□
	Screws clamp terminals		●	●
	Lug clamp terminals		-	-
Rated operational voltage, Ue			690V	690V
Rated insulation voltage, Ui			690V	690V
Rated impulse withstand voltage, Uimp			6kV	6kV
Trip class			10A, 20	10A, 20
Setting range			0.1~18A	0.1~40A
Size and weight	Weight	kg	0.1	0.17
	Size(W×H×D)	mm	45×73.2×63.7	45×75×90

* The safety cover of magnetic contactor and thermal overload relay is optional.



40AF		65AF		100AF			150AF	
MC-32a	MC-40a	MC-50a	MC-65a	MC-75a	MC-85a	MC-100a	MC-130a	MC-150a
•	•	•	•	•	•	•	•	•
-	-	•	•	•	•	•	•	•
3pole		3pole		3pole			3pole	
1000V		1000V		1000V			1000V	
1000V		1000V		1000V			1000V	
50/60Hz		50/60Hz		50/60Hz			50/60Hz	
8kV		8kV		8kV			8kV	
1800 operations per hour		1800 operations per hour		1800 operations per hour			1200 operations per hour	
12 mil. operations		12 mil. operations		12 mil. operations			5 mil. operations	
2 mil. operations		2 mil. operations		2 mil. operations	1 mil. operations		4 mil. operations	
55	60	100	115	125	135	160	200	250
7.5	11	15	18.5	22	25	30	37	45
32	40	55	65	75	85	105	130	150
15	18.5	22	30	37	45	55	60	75
32	40	50	65	75	85	105	130	150
18.5	22	30	33	37	45	55	60	70
28	32	43	60	64	75	85	90	100
18.5	22	30	33	37	45	55	55	55
20	23	28	35	42	45	65	60	60
22	22	30	30	37	37	37	75	75
17	17	23	23	28	28	28	50	50
600	700	1000	1050	1100	1200	1320	1350	1800
260	300	550	700	750	800	900	950	1200
160	190	330	380	400	450	500	700	800
100	120	250	270	300	350	400	550	600
70	80	150	200	220	270	270	350	450
55	65	90	120	140	170	180	200	300
50	60	87	96	114	150	160	175	280
50	60	70	100	110	135	160	200	250
2	3	3	5	5	7.5	10	10	15
5	7.5	10	15	15	15	20	20	25
7.5	15	20	25	25	30	30	40	40
10	15	25	30	30	40	40	40	50
20	30	40	50	50	60	75	75	100
25	30	50	60	60	75	75	75	75
1P	2				3			4
0.55		1.05		1.93			2.4	
69×83×90		79×106×119		94×140×135.8			119×158×130.3	
0.77		1.3		2.8				
69×83×117.1		79×106×146.4		94×140×172.3				
2NO2NC		2NO2NC		2NO2NC			2NO2NC	
UA-1		UA-1		UA-1			UA-1	
UA-2, UA-4		UA-2, UA-4		UA-2, UA-4			UA-2, UA-4	



MT-32/□	MT-63/□	MT-95/□	MT-150/□
•	•	•	•
-	•	•	•
690V	690V	690V	690V
690V	690V	690V	690V
6kV	6kV	6kV	6kV
10A, 20	10A, 20	10A, 20	10A, 20
0.1~40A	4~65A	7~100A	34~150A
0.17	0.31/0.33	0.48/0.5	0.67
45×75×90	55×81×100	70×97×110	95×109×113

Contactors & Overload relays

Metasol MC 3P 225 to 2100A



MC type Magnetic Contactors

Frame size				225AF		400AF		
Type				MC-185a	MC-225a	MC-265a	MC-330a	MC-400a
	Screws clamp terminals			●	●	●	●	●
	Lug clamp terminals			-	-	-	-	-
Number of poles				3pole		3pole		
Rated operational voltage, Ue				1000V		1000V		
Rated insulation voltage, Ui				1000V		1000V		
Rated frequency				50/60Hz		50/60Hz		
Rated impulse withstand voltage, Uimp				8kV		8kV		
Maximum operating rate in operating cycles per hour(AC3)				1200 operations per hour		1200 operations per hour		
Durability	Mechanical			5 mil. operations		5 mil. operations		2.5 mil. operations
	Electrical			1 mil. operations		1 mil. operations		0.5 mil. operations
Current and power	AC-1, Thermal current	A		300	350	400	500	520
	AC-3 200/240V	kW		55	75	80	90	125
		A		185	225	265	330	400
	380/440V	kW		90	132	147	160	200
		A		185	225	265	330	400
	500/550V	kW		110	132	147	160	225
		A		180	200	225	250	350
	690V	kW		110	140	160	200	250
		A		120	150	185	220	300
	1000V	kW		132	132	147	147	147
		A		90	90	105	105	105
	Rated Short-time withstand current (IEC 60947)			2000	2500	3500	4000	4600
UL rating (50/60Hz)	1s	A		1500	1700	2400	3000	4400
	30s	A		1000	1200	1500	2500	2974
	1min	A		800	1000	1100	1700	1846
	3min	A		520	700	800	1000	1313
	10min	A		350	500	600	620	760
	≥15min	A		320	400	500	553	699
	Continuous current	A		300	350	400	500	520
	Single phase	110~120V	HP	15	15	-	-	-
		220~240V	HP	30	40	-	-	-
	Three phase	200~208V	HP	60	60	75	100	125
		220~240V	HP	60	75	100	100	150
		440~480V	HP	125	150	200	200	300
Size and weight	550~600V	HP		125	150	200	200	300
	NEMA size					5		
Auxiliary(standard)	AC control	Weight	kg	5.4		9.2		
	DC control	Size(W×H×D)	mm	138×203×185.1		163×243×204.4		
	Weight	kg						
	Size(W×H×D)	mm						
Auxiliary				2NO2NC		2NO2NC		
Side mount				AU-100, AU-100E (Max.4NO4NC)		AU-100, AU-100E (Max.4NO4NC)		
Front mount				-		-		

MT type Thermal Overload Relays



Type				MT-225/□	MT-400/□
Screws clamp terminals				●	●
Lug clamp terminals				-	-
Rated operational voltage, Ue				690V	690V
Rated insulation voltage, Ui				690V	690V
Rated impulse withstand voltage, Uimp				6kV	6kV
Trip class				10A, 20	10A, 20
Setting range				65~240A	85~400A
Size and weight		Weight	kg	2.5	2.6
		Size(W×H×D)	mm	147×141×184	151×171×198

* The safety cover of magnetic contactor and thermal overload relay is optional.



800AF			1260AF	2650AF			
MC-500a	MC-630a	MC-800a	MC-1260a	MC-1400a	MC-1700a	MC-2100a	MC-2650a
●	●	●	●	●	●	●	●
-	-	-	-	-	-	-	-
3pole			3pole	3pole			
1000V			1000V	1000V			
1000V			1000V	1000V			
50/60Hz			50/60Hz	50/60Hz			
8kV			8kV	8kV			
1200 operations per hour			300 operations per hour	300 operations per hour			
2.5 mil. operations			0.5 mil. operations	0.5 mil. operations			0.3 mil. operations
0.5 mil. operations			0.05 mil. operations	0.05 mil. operations			0.02 mil. operations
700	900	1050	1260	1400	1700	2100	2650
147	190	220	-	290	310	-	-
500	630	800	-	860	1050	-	-
265	330	440	-	550	700	900	-
500	630	800	-	860	1050	1450	-
265	330	500	-	-	-	-	-
400	500	720	-	-	-	-	-
300	400	500	-	800	1000	-	-
380	420	630	-	800	950	-	-
280	280	280	-	-	-	-	-
220	220	220	-	-	-	-	-
6000	7000	7500	8000	-	-	-	-
5050	6400	7000	7200	8000	10000	10000	10000
4400	4500	4900	5200	-	-	-	-
3400	3500	3800	4000	4500	5500	5500	5500
2000	2200	2500	2300	-	-	-	-
1400	1550	1550	3000	2600	3000	3000	3000
1100	1300	1300	1500	-	-	-	-
700	900	1050	1260	1400	1700	2100	2650
-	-	-	-	-	-	-	-
-	-	-	-	-	-	-	-
150	200	200					
200	250	300					
400	500	600					
400	500	600					
6		7					
22.4			23.5	33.8			47
285×312×245.3			285×352×246	431×380×246			431×392×246
2NO+2NC			2NO+2NC	2NO+2NC			
AU-100, AU-100E (Max.4NO4NC)			AU-100, AU-100E (Max.4NO4NC)	AU-100, AU-100E (Max.4NO4NC)			
-			-	-			



MT-800/□
●
-
690V
690V
6kV
10A, 20
200~800A
11.5
360×530×212

Contactors & Overload relays

Metasol MC 4P 18 to 85A

MC type Magnetic Contactors



Frame size				18AF			
Type				MC-6a/4	MC-9a/4	MC-12a/4	MC-18a/4
Screw clamp terminal				●	●	●	●
Number of poles				4pole			
Rated operational voltage (Ue)				690V			
Rated insulation voltage (Ui)				690V			
Rated frequency				50/60Hz			
Rated impulse withstand voltage, Uimp				6kV			
Maximum operating rate in operating cycles per hour(AC1)				1800 operations per hour			
Durability		Mechanical		15 mil. Operations			
		Electrical		0.5 mil. Operations		0.8 mil. Operations	
Current and Power	Thermal current		A	25	25	25	40
	AC-1	200/240V	kW	9	9	9	15
			A	25	25	25	40
		380/400V	kW	17	17	17	27
			A	25	25	25	40
		500/550V	kW	21	21	21	35
			A	25	25	25	40
		690V	kW	27	27	27	44
			A	25	25	25	40
	UL rating	Continuous current		A	25	25	25
(50/60Hz)	Single	110~120V	HP	0.5	0.5	0.75	1
	Phase	220~240V	HP	1.5	1.5	2	3
	Three	200~208V	HP	2	2	3	7.5
	Phase	220~240V	HP	3	3	5	7.5
		440~480V	HP	5	5	7.5	10
		550~600V	HP	7.5	7.5	10	15
Size and weight		AC	Weight	kg	0.33		
		Control	Size(W×H×D)	mm	45×73.5×80.4		
		DC	Weight	kg	0.4		
		Control	Size(W×H×D)	mm	45×73.5×96.6		
Auxiliary(standard)				-			
Auxiliary		Side Mount		UA-1			
		Front Mount		UA-2, UA-4			



22AF	40AF		85AF			
MC-22a/4	MC-32a/4	MC-40a/4	MC-50a/4	MC-65a/4	MC-75a/4	MC-85a/4
●	●	●	●	●	●	●
4pole	4pole		4pole			
690V	690V		690V			
690V	690V		1000V			
50/60Hz	50/60Hz		50/60Hz			
6kV	6kV		8kV			
1800 operations per hour	1800 operations per hour		1800 operations per hour			
15 mil. Operations	15 mil. Operations		12 mil. Operations			
1 mil. Operations	1 mil. Operations		1 mil. Operations			
40	50	60	80	100	110	135
15	18	22	30	37	41	51
40	50	60	80	100	110	135
27	35	42	56	70	76	95
40	50	60	80	100	110	135
35	43	52	70	88	97	120
40	50	60	80	100	110	135
44	55	66	88	110	120	150
40	50	60	80	100	110	135
32	45	50	70	80	90	100
2	2	3	3	5	5	7.5
3	5	5	7.5	10	15	15
7.5	7.5	10	10	15	20	25
7.5	10	10	15	20	25	30
10	20	25	30	40	50	50
15	20	25	30	40	50	50
0.4	0.59		1.2			
47.2×80×86.8	59×83.5×94.5		91×123.5×117.8			
0.5	0.7		1.29			
47.2×80×113.2	59×83.5×121		91×123.5×117.8			
-	-		-			
AU-1	AU-1		AU-1			
UA-2, UA-4	UA-2, UA-4		UA-2, UA-4			

Contactors & Overload relays

Metasol MC 4P 225 to 800A

MC type Magnetic Contactors



Frame size				225AF				
Type				MC-100a/4	MC-130a/4	MC-150a/4	MC-185a/4	MC-225a/4
Screw clamp terminal				●	●	●	●	●
Number of poles				4pole				
Rated operational voltage (Ue)				690V				
Rated insulation voltage (Ui)				1000V				
Rated frequency				50/60Hz				
Rated impulse withstand voltage, Uimp				8kV				
Maximum operating rate in operating cycles per hour(AC1)				1200 operations per hour				
Durability		Mechanical		5 mil. Operations				
		Electrical		0.8 mil. Operations				
Current and Power	Thermal current		A	200	250	275	300	350
	AC-1	200/240V	kW	57	60	76	87	100
				A	200	250	275	300
	380/400V		kW	106	110	142	165	185
				A	200	250	275	300
	500/550V		kW	132	137	180	205	230
				A	200	250	275	300
	690V		kW	165	170	225	255	290
				A	200	250	275	300
	UL rating	Continuous current		A	200	250	275	300
(50/60Hz)	Single	110~120V	HP	7.5	10	15	15	15
	Phase	220~240V	HP	15	20	25	30	40
	Three	200~208V	HP	30	40	40	60	60
	Phase	220~240V	HP	30	40	50	60	75
		440~480V	HP	60	75	100	125	150
		550~600V	HP	60	75	100	125	150
Size and weight		AC	Weight	kg	5.6 175×203×185			
		Control	Size(W×H×D)	mm				
		DC	Weight	kg				
		Control	Size(W×H×D)	mm				
Auxiliary(standard)				2NO2NC				
Auxiliary		Side Mount		AU-100 / AU-100E				
		Front Mount		-				

* - FLA = 722 A, LRA = 5618 A

** - FLA = 566 A, LRA = 4495 A



400AF			800AF		
MC-265a/4	MC-330a/4	MC-400a/4	MC-500a/4	MC-630a/4	MC-800a/4
●	●	●	●	●	●
	4pole			4pole	
	690V			690V	
	1000V			1000V	
	50/60Hz			50/60Hz	
	8kV			8kV	
	1200 operations per hour			1200 operations per hour	
	2.5 mil. Operations			2.5 mil. Operations	
	0.5 mil. Operations			0.5 mil. Operations	
400	500	520	700	900	1050
115	135	160	245	255	310
400	500	520	700	900	1050
215	250	300	450	470	570
400	500	520	700	900	1050
265	315	375	560	590	710
400	500	520	700	900	1050
335	390	470	710	740	900
400	500	520	700	900	1050
400	500	520	700	900	1050
-	-	-	-	-	-
-	-	-	-	-	-
75	100	125	150	200	200
100	125	150	200	250	300
200	200	300	400	500	600 *
200	200	300	400	500	600 **
9.9			26.3		
206×243×205			346×310×244		

2NO2NC			2NO2NC		
AU-100			AU-100		
-			-		

Mini Contactors

6 to 16A

Mini contactors

3NO main contacts
1 auxiliary contacts



Screw clamp type



Fast-on type



Cage clamp type



Solder pin type

Frame size		6A		9A		12A		16A	
Screw clamp type	AC coil	GMC-6M		GMC-9M		GMC-12M		GMC-16M	
	DC coil	GMD-6M		GMD-9M		GMD-12M		GMD-16M	
Fast-on type	AC coil	GMC-6MF		GMC-9MF		GMC-12MF		GMC-16MF	
	DC coil	GMD-6MF		GMD-9MF		GMD-12MF		GMD-16MF	
Cage clamp type	AC coil	GMC-6MC		GMC-9MC		GMC-12MC		GMC-16MC	
	DC coil	GMD-6MC		GMD-9MC		GMD-12MC		GMD-16MC	
Solder pin type	AC coil	GMC-6MP		GMC-9MP		GMC-12MP		GMC-16MP	
	DC coil	GMD-6MP		GMD-9MP		GMD-12MP		GMD-16MP	
Ratings / IEC60947-4		kW	A	kW	A	kW	A	kW	A
AC1		20		20		20		20	
AC3	200/240V	1.5	7	2.2	9	3	12	4	16
	380/440V	2.2	6	4	9	5.5	12	7.5	16
	500/550V	3	5	3.7	6	4	7	5.5	9
	690V	3	4	4	5	4	5	4	5
Ratings / UL508		hp	A	hp	A	hp	A	hp	A
continuous current		I _{th} = 20A (maximum for cage clamp type is 10A)							
single phase	120V	1/2		1/2		1 *		-	
	230V/240V	1		1.5		2 **		-	
three phase	240V	1.5		3		3		-	
	480V	3		5		7.5 ***		-	
	600V	3		5		7.5		-	
	Wire Range:	Copper, 75°C, Stranded, 18-12AWG							
NEMA size		00		00		00		0	
Additional auxiliary contacts		Screw clamp type		Fast-on type		Cage clamp type		Solder pin type	
	2-pole, Front mount	AU-2M 		AU-2MF 		AU-2MC 		AU-1MP 	
	4-pole, Front mount	AU-4M 		AU-4MF 		AU-4MC 			
	2-pole, Side mount	AU-1M 		AU-1MF 		AU-1MC 			

Note) * = 1/2 for cage clamp type, ** = 1.5hp for cage clamp type, *** = 5hp for cage clamp type
16AF : not approved from UL

Overload Relays

Bimetallic style Type GT			Setting ranges (A) 0.1 - 0.16 0.16 - 0.25 0.25 - 0.4 0.4 - 0.63 0.63 - 1 1 - 1.6 1.6 - 2.5 2.5 - 4	4 - 6 5 - 8 6 - 9 7 - 10 9 - 13 12 - 16		Base for separate mount	
	GT-12M						
	Differential						GTK-12M
	Non-differential (3-heater)						GTH-12M/3
Non-differential (2-heater)		GTH-12M					

Digital Motor Protection Relay



DMP -S/Sa



DMP -T/Ta



Model No.			DMP06-S/Sa	DMP60-S/Sa	DMP06-T/Ta	DMP60-T/Ta
Wiring			Screw type		Tunnel type	
Panel mount			Unit or Extension Note1)			
Operation time			Select either reverse time characteristics or definite time characteristics			
Protection		Over current	According to the setting time			
		Phase failure	3 sec.			
		Reverse phase	Within 0.1 sec.			
		Asymmetry	5 sec.			
		Stall	5 sec.			
		Lock	Within 0.5 sec.			
		Under current	3 sec.			
		Ground fault	Within 0.05~1 sec. Selectable (0.05~1.0sec)			
		Short circuit Note2)		Within 50ms		
Alarm			Variable (60~110% of the setting current)			
Current setting range (A)			0.5~6	5~60	0.5~6	5~60
Motor capacity (kW)		220~240V	0.09~0.75	1.1~11	0.09~0.75	1.1~11
		380~440V	0.12~1.5	2.2~22	0.09~1.5	2.2~22
Time setting range (sec)	Definite time	Delay in starting	0~60sec			
		Delay in operating	0~30sec			
	Inverse time		0~60sec			
	Reset		Manual reset			
Tolerance		Current	±5%			
		Time	±5% (or±0.5sec)			
Operating power Note3)		Voltage	AC 190~250V			
		Frequency	60Hz (50Hz)			
Aux. contact	OL	1a1b	3A/250Vac Resistive load			
	AL	1a	3A/250Vac Resistive load			
Insulation resistance			Over DC500V 100MΩ			
Surge impulse voltage(IEC1000-4-5)			1.2×50μS 6kV (Apply standard wave form)			
Fast transient burst(IEC1000-4-4)			2.5kV/5min			
Environment	Temperature	Operation	-25~70℃			
		Storage	-30~80℃			
	Humidity		30~90% RH (No freezing)			
Display		7-Segment	3 phase current, cause of a fault			
		Bar-Graph	60~110% of real load current			
Mounting type			35mm Din-rail/Panel			

Note1) In extension type, the digital EMPRI is calibrated with combining the display past and main body so, please cautious not to combine the display part and main body with different part No.

Note2) Instantaneous short circuit protection is optional

Note3) Operational voltage of AC 110V and 50Hz is optional

Manual Motor Starters

Quick selection table ... IEC rating



Frame			32AF																			
Type	Current adjustable type		MMS-32S										MMS-32H									
	Instantaneous type		-										MMS-32HI									
Breaking capacity			Standard										High breaking									
Handle Type			Toggle										Rotary									
Number of poles			3										3									
Rated operational voltage (Ue)			Up to 690V										Up to 690V									
Rated frequency			50/60 Hz										50/60 Hz									
Rated insulation voltage (Ui)			690V										690V									
Rated impulse voltage (Uimp)			6kV										6kV									
Utilization category	IEC 60 947-2 (Breaker)		Cat. A										Cat. A									
	IEC 60 947-4 (Motor starter)		AC 3										AC 3									
Mechanical endurance (Operating)			100,000										100,000									
Electrical endurance (Cycles)			100,000										100,000									
Max operating frequency per hour (Ope./h)			25										25									
Temperature compensation (Operation)			-20 ~ +60℃										-20 ~ +60℃									
Instantaneous short circuit release			13 × Ie max.										13 × Ie max.									
Overload protection			○										○									
Phase failure function			○										○									
Trip indicating function			×										×									
Test function			○										○									
Dimension(W × H × D)			45 × 105 × 54.4										45 × 105 × 60.3									
Weight (g)			320										360									
Rated breaking capacity (kA)	Rated operational current (Ie)	Thermal release Adjustment range (A)	220V 240V 230V	415V 400V		460V 440V		525V 500V		690V 600V		220V 240V 230V	415V 400V		460V 440V		525V 500V		690V 600V			
			Icu Ics	Icu Ics	Icu Ics	Icu Ics	Icu Ics	Icu Ics	Icu Ics	Icu Ics	Icu Ics	Icu Ics	Icu Ics	Icu Ics	Icu Ics	Icu Ics	Icu Ics	Icu Ics				
			0.16	0.1~0.16		100 100	100 100	100 100	100 100	100 100	100 100	100 100	100 100	100 100	100 100	100 100	100 100	100 100	100 100	100 100	100 100	100 100
			0.25	0.16~0.25		100 100	100 100	100 100	100 100	100 100	100 100	100 100	100 100	100 100	100 100	100 100	100 100	100 100	100 100	100 100	100 100	100 100
			0.4	0.25~0.4		100 100	100 100	100 100	100 100	100 100	100 100	100 100	100 100	100 100	100 100	100 100	100 100	100 100	100 100	100 100	100 100	100 100
			0.63	0.4~0.63		100 100	100 100	100 100	100 100	100 100	100 100	100 100	100 100	100 100	100 100	100 100	100 100	100 100	100 100	100 100	100 100	100 100
			1	0.63~1		100 100	100 100	100 100	100 100	100 100	100 100	100 100	100 100	100 100	100 100	100 100	100 100	100 100	100 100	100 100	100 100	100 100
			1.6	1~1.6		100 100	100 100	100 100	100 100	100 100	100 100	3 3	100 100	100 100	100 100	100 100	100 100	100 100	100 100	100 100	100 100	100 100
			2.5	1.6~2.5		100 100	100 100	100 100	100 100	50 38	5 3	100 100	100 100	100 100	100 100	100 100	100 100	100 100	100 100	8 8	8 8	
			4	2.5~4		100 100	100 100	100 100	50 38	15 11	3 3	100 100	100 100	100 100	100 100	100 100	100 100	100 100	100 100	6 6	6 6	
			6	4~6		100 100	100 100	100 100	15 11	10 8	3 3	100 100	100 100	100 100	100 100	100 100	100 100	100 100	100 100	6 6	6 6	
			8	5~8		100 100	100 100	100 100	15 11	10 8	3 3	100 100	100 100	100 100	100 100	50 38	50 38	6 6	6 6			
			10	6~10		100 100	50 38	15 11	6 5	3 3	100 100	100 100	100 100	100 100	50 38	50 38	6 6	6 6				
			13	9~13		100 100	50 38	10 8	6 5	3 3	100 100	100 100	100 100	50 38	42 32	6 6	6 6					
			17	11~17		50 38	20 15	10 8	6 5	3 3	100 100	50 38	20 15	10 8	4 4	4 4						
			22	14~22		40 30	15 11	8 6	6 5	3 3	100 100	50 38	20 15	10 8	4 4	4 4						
			26	18~26		40 30	15 11	8 6	6 5	3 3	100 100	50 38	20 15	10 8	4 4	4 4						
			32	22~32		30 22	15 11	6 4	5 4	3 3	100 100	50 38	20 15	10 8	4 4	4 4						
			40	28~40		- -	- -	- -	- -	- -	- -	- -	- -	- -	- -	- -	- -	- -	- -	- -	- -	- -
			50	34~50		- -	- -	- -	- -	- -	- -	- -	- -	- -	- -	- -	- -	- -	- -	- -	- -	- -
			63	45~63		- -	- -	- -	- -	- -	- -	- -	- -	- -	- -	- -	- -	- -	- -	- -	- -	- -
			75	55~75		- -	- -	- -	- -	- -	- -	- -	- -	- -	- -	- -	- -	- -	- -	- -	- -	- -
			90	70~90		- -	- -	- -	- -	- -	- -	- -	- -	- -	- -	- -	- -	- -	- -	- -	- -	- -
			100	80~100		- -	- -	- -	- -	- -	- -	- -	- -	- -	- -	- -	- -	- -	- -	- -	- -	- -



63AF										100AF									
MMS-63S					MMS-63H					MMS-100S					MMS-100H				
-					MMS-63HI					-					MMS-100HI				
Standard					High breaking					Standard					High breaking				
Rotary					Rotary					Rotary					Rotary				
3					3					3					3				
Up to 690V					Up to 690V					Up to 690V					Up to 690V				
50/60 Hz					50/60 Hz					50/60 Hz					50/60 Hz				
1,000V					1,000V					1,000V					1,000V				
8kV					8kV					8kV					8kV				
Cat. A					Cat. A					Cat. A					Cat. A				
AC 3					AC 3					AC 3					AC 3				
50,000					50,000					50,000					50,000				
25,000					25,000					25,000					25,000				
25					25					25					25				
-20 ~ +60°C					-20 ~ +60°C					-20 ~ +60°C					-20 ~ +60°C				
13 × I _e max.					13 × I _e max.					13 × I _e max.					13 × I _e max.				
○					○					○					○				
○					○					○					○				
×					×					○					○				
○					○					○					○				
55×125×112.3					55×125×112.3					70×165×138					70×165×138				
1,000					1,000					2,200					2,200				
220V 240V 230V	415V 400V	460V 440V	525V 500V	690V 600V	220V 240V 230V	415V 400V	460V 440V	525V 500V	690V 600V	220V 240V 230V	415V 400V	460V 440V	525V 500V	690V 600V	220V 240V 230V	415V 400V	460V 440V	525V 500V	690V 600V
I _{cu}	I _{cs}	I _{cu}	I _{cs}	I _{cu}	I _{cs}	I _{cu}	I _{cs}	I _{cu}	I _{cs}	I _{cu}	I _{cs}	I _{cu}	I _{cs}	I _{cu}	I _{cs}	I _{cu}	I _{cs}	I _{cu}	I _{cs}
-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
100	100	100	100	15	12	10	8	4	3	100	100	100	100	50	38	50	38	6	5
100	100	50	38	10	8	6	5	4	3	100	100	100	100	50	38	42	32	6	5
100	100	25	19	10	8	6	5	4	3	100	100	50	50	50	38	12	9	5	5
50	38	25	19	10	8	6	5	4	3	100	100	50	50	50	38	12	9	5	5
50	38	25	19	10	8	6	5	4	3	100	100	50	50	35	27	12	9	5	5
50	38	25	19	10	8	6	5	4	3	100	100	50	50	35	27	10	8	5	5
50	38	25	19	10	8	6	5	4	3	100	100	50	50	35	27	10	8	5	5
50	38	25	19	10	8	6	5	4	3	100	100	50	50	35	27	10	8	5	5
50	38	25	19	10	8	6	5	4	3	100	100	50	50	35	27	10	8	5	5
-	-	-	-	-	-	-	-	-	-	100	100	50	38	40	30	8	6	5	4
-	-	-	-	-	-	-	-	-	-	100	100	50	38	40	30	8	6	5	4
-	-	-	-	-	-	-	-	-	-	100	100	50	38	40	30	8	6	5	4

Molded Case Circuit Breakers

Susol MCCB 100AF to 800AF Series

Frame			TE100		TE160		TD100			TD160		
Frame size [AF]			100		160		100			160		
Rated current, In *			16~100		100,125,160		16, 20, 25, 32, 40, 50, 63, 80, 100			1P: 16, 20, 25, 32, 40, 50, 63, 80,100,125, 160 2, 3P: 100, 125, 160		
No. of poles			3,4		3,4		2*, 3, 4			1, 2*, 3, 4		
Rated operational voltage, Ue		AC [V]	690		690		690			240(1P), 690		
		DC [V]	500		500		500			250(1P), 500		
Rated impulse withstand voltage, Uimp [kV]			8		8		8			8		
Rated insulation voltage, Ui [V]			750		750		750			750		
Rated ultimate short-circuit breaking capacity, Icu			S	N	S	N	N	H	L	N	H	L
AC 50/60Hz	220/240V	[kA]	50	85	50	85	85	100	200	30(1P) 85	50(1P) 100	200
	380/415V	[kA]	37	50	37	50	50	85	150	50	85	150
	440/460V	[kA]	25	37	25	37	50	70	130	50	70	130
	480/500V	[kA]	18	25	18	25	30	50	65	30	50	65
	660/690V	[kA]	6	8	6	8	5	8	10	5	8	10
DC	250V	[kA]	37	50	37	50	42	65	100	16(1P) 42	25(1P) 65	100
	500V(2poles in series)	[kA]	37	50	37	50	42	65	100	42	65	100
Rated service breaking capacity, Ics [%Icu]			100%	100%	100%	100%	100%	100%	100%	100%	100%	100%
Rated short-circuit making capacity Icm												
AC 50/60Hz	220/240V	[kA]	105	187	105	187	187	220	440	105(1P) 187	105(1P) 220	440
	380/415V	[kA]	77.7	105	77.7	105	105	187	330	105	187	330
	440/460V	[kA]	52.5	77.7	52.5	77.7	105	154	286	105	154	286
	480/500V	[kA]	36	52.5	36	52.5	63	105	143	63	105	143
	660/690V	[kA]	9.2	13.6	9.2	13.6	8	14	17	8	14	17
Category of utilization			A		A		A			A		
Isolation behavior			●		●		●			●		
Trip unit (release)												
Thermal-Magnetic												
●fixed-thermal, fixed-magnetic		FTU	●		●		●			●		
●adjustable-thermal, fixed-magnetic		FMU					●			●**		
●adjustable-thermal, adjustable-magnetic		ATU	●		●		-			-		
●magnetic only		MTU	-		-		-			-		
Electronic			-		-							
●LSI		ETS	-		-		-			-		
●LSI		ETM	-		-		-			-		
Option	Earth-fault protection, Ig	Zone selective interlocking, ZSI	-		-		-			-		
		Ammeter	-		-		-			-		
		Communication	-		-		-			-		
		Earth-leakage protection module	-		-		-			-		
Connection	fixed	front-connection	●		●		●			●		
		rear-connection	●		●		●			●**		
	plug-in	front-connection	-		-		●			●**		
		rear-connection	-		-		●			●**		
Mechanical life		[operations]	25000		25000		25000			25000		
Electrical life @ 415 V AC		[operations]	10000		10000		10000			10000		
Basic dimensions, W×H×D (front connection)	1-pole	[mm]	-		-		-			35×140×86		
	3-pole	[mm]	76×130×82		76×130×82		90×140×86			90×140×86		
	4-pole	[mm]	101×130×82		101×130×82		120×140×86			120×140×86		
Weight (front connection)	1-pole	[kg]	-		-		-			0.57		
	3-pole	[kg]	1.05		1.05		1.5			1.5		
	4-pole	[kg]	1.35		1.35		1.8			1.8		
Reference standard			IEC60947-2		IEC60947-2		IEC60947-2			IEC60947-2		

Note) ● applicable or available

* Applicable to MCCBs equipped with FTU, FMU, ATU ** Not applicable to 1pole
* 2 pole MCCB in 3pole frame size

※ The trip unit ATU is available from 125A



TS100			TS160			TS250			TS400			TS630			TS800		
100			160			250			400			630			800		
40, 50, 63, 80, 100			(100)*, 125, 160			125, 160, 200, 250			300, 400			500, 630			800		
2*, 3, 4			2*, 3, 4			2*, 3, 4			2*, 3, 4			2*, 3, 4			2*, 3, 4		
690			690			690			690			690			690		
500			500			500			500			500			500		
8			8			8			8			8			8		
750			750			750			750			750			750		
N	H	L	N	H	L	N	H	L	N	H	L	N	H	L	N	H	L
100	120	200	100	120	200	100	120	200	100	120	200	100	120	200	100	120	200
50	85	150	50	85	150	50	85	150	65	85	150	65	85	150	65	100	150
50	70	130	50	70	130	50	70	130	65	85	130	65	85	130	65	100	130
42	65	85	42	65	85	42	65	85	42	65	85	42	65	85	42	85	100
10	15	20	10	15	20	10	15	20	10	20	35	10	20	35	10	20	35
50	85	100	50	85	100	50	85	100	50	85	100	50	85	100	50	85	100
50	85	100	50	85	100	50	85	100	50	85	100	50	85	100	50	85	100
100%	100%	100%	100%	100%	100%	100%	100%	100%	100%	100%	100%	100%	100%	100%	100%	100%	100%
220	264	440	220	264	440	220	264	440	220	264	440	220	264	440	220	264	440
105	187	330	105	187	330	105	187	330	143	187	330	143	187	330	143	220	330
105	154	286	105	154	286	105	154	286	143	187	286	143	187	286	143	220	286
88	143	187	88	143	187	88	143	187	88	143	187	88	143	187	88	187	220
17	30	40	17	30	40	17	30	40	17	40	74	17	40	74	17	40	74
A			A			A			A			A			A		
●			●			●			●			●			●		
●			●			●			●			●			●		
●			●			●			●			●			●		
-			●			●			●			●			●		
●			●			●			●			●			●		
●			●			●			●			●			●		
-			-			-			-			-			-		
-			-			-			-			-			-		
-			-			-			-			-			-		
-			-			-			-			-			-		
-			-			-			-			-			-		
-			-			-			-			-			-		
-			-			-			-			-			-		
-			-			-			-			-			-		
-			-			-			-			-			-		
-			-			-			-			-			-		
-			-			-			-			-			-		
25000			25000			25000			20000			20000			10000		
10000			10000			10000			6000			6000			3000		
-			-			-			-			-			-		
105×160×86			105×160×86			105×160×86			140×260×110			140×260×110			210×320×135		
140×160×86			140×160×86			140×160×86			186.5×260×110			186.5×260×110			280×320×135		
-			-			-			-			-			-		
2			2			2			5.4			5.4			15.1		
2.6			2.6			2.6			7.2			7.2			19.6		
IEC60947-2			IEC60947-2			IEC60947-2			IEC60947-2			IEC60947-2			IEC60947-2		

	Amb. Temp.	-5°C	0°C	10°C	20°C	25°C	30°C	35°C	40°C	45°C	50°C
Calibrated for 40°C	TD160	122.5%	120.0%	115.0%	110.0%	107.5%	105.0%	102.5%	100.0%	97.5%	95.0%
	TS250	122.5%	120.0%	115.0%	110.0%	107.5%	105.0%	102.5%	100.0%	97.5%	95.0%
	TS630	110.0%	109.0%	107.0%	105.0%	104.0%	103.0%	101.5%	100.0%	98.5%	97.0%
	TS800	110.0%	109.0%	107.0%	105.0%	104.0%	103.0%	101.5%	100.0%	98.5%	97.0%
Calibrated for 50°C	TD160	122.0%	120.0%	116.0%	112.0%	110.0%	108.0%	106.0%	104.0%	102.0%	100.0%
	TS250	122.0%	120.0%	116.0%	112.0%	110.0%	108.0%	106.0%	104.0%	102.0%	100.0%
	TS630	122.2%	112.0%	110.0%	108.0%	107.0%	106.0%	104.5%	103.0%	101.5%	100.0%
	TS800	112.2%	112.0%	110.0%	108.0%	107.0%	106.0%	104.5%	103.0%	101.5%	100.0%

Molded Case Circuit Breakers

Susol MCCB 1600AF Series

Electrical characteristics



Frame				TS1000			TS1250		TS1600			
Type				TS1000			TS1250		TS1600			
Ampere frame				1000			1250		1600			
Pole				3, 4			3, 4		3, 4			
Rated current, In		(A)	-5~40°C	800, 1000			1250		1600			
			50°C	800, 1000			1250		1560			
			65°C	800, 1000			1240		1420			
Rated insulation voltage, Ui		(V)		1000			1000		1000			
Rated impulse withstand voltage, Uimp		(kV)		8			8		8			
Rated operational voltage, Ue		(V)	AC50/60Hz	690			690		690			
			DC	-			-		-			
Rated short-circuit breaking capacity IEC60947-2 AC50/60H (sym)				N	H	L	N	H	N	H		
Rated ultimate short-circuit breaking capacity, (kA) (Icu)			220/240V	55	75	200	55	75	55	75		
			380/415V	50	70	150	50	70	50	70		
			440/460V	50	65	130	50	65	50	65		
			480/500V	40	50	100	40	50	40	50		
			660/690V	35	45	-	35	45	35	45		
DC		250V 2P	-	-	-	-	-	-	-			
		500V 2P	-	-	-	-	-	-	-			
		750V 3P	-	-	-	-	-	-	-			
Rated service breaking capacity (Ics)		%Icu		100%	75%	100%	100%	75%	100%	75%		
Rated short-circuit making capacity (kA) (Icw)		AC50/60Hz	1s	25		12		25		25		
			3s	-				-		-		
Overriding instantaneous protection			kA peak	50		30		50		50		
Isolation				○			○		○			
Category				B		A		B		B		
(Life cycle)		Mechanical life (operations)		10000		4000		10000		10000		
		Electrical life (operations)	440V	In/2	6000		4000		5000		5000	
				In	5000		3000		4000		2000	
		690V	In/2	4000		3000		3000		2000		
			In	2000		2000		2000		1000		
Pollution degree				3			3		3			
Dimension (mm)			3-pole	210×327×152.5								
(H×W×D)			4-pole	280×327×152.5								
Weight (kg)			3-pole	13								
			4-pole	16.8								

Overview

Classification	N type	A type	P type	S type
Externals				
Current protection	• L / S / I / G / Thermal	• L / S / I / G / Thermal • ZSI(Protective coordination)	• L / S / I / G / Thermal(Continuous) • ZSI(Protective coordination)	• P type
Other protection	-	• Earth leakage (Option)	• Earth leakage(Option) • Over/Under current • Over/Under frequency • Unbalance(Voltage/Current) • Reverse power	• P type
Measurement function	-	• Current (R / S / T / N)	• 3 Phase Voltage/Current RMS/Vector • Power(P, Q, S), PF(3-Phase) • Energy(Positive/Negative) • Frequency, Demand	• 3 Phase Voltage/Current RMS/Vector • Power(P, Q, S), PF(3-Phase) • Energy(Positive/Negative) • Frequency, Demand • Voltage/Current harmonics (1st~63th) • 3 Phase Waveforms • THD, TDD, K-Factor
Fine adjustment	-	-	• Fine adjustment for long/short time delay/instantaneous/ ground	• P type
Pre Trip Alarm	-	-	• Overload protection relays : DO (Alarm) (Ground fault is not available when using Pre trip alarm)	• P type
Digital Output	-	• 3DO (Fixed) • L, S/I, G Alarm	• 3DO (Programmable) • Trip, Alarm, General	• P type
IDMTL setting	-	-	• Compliance with IEC60255-3 SIT, VIT, EIT, DT	• P type
Communication	-	• Modbus/RS-485 • Profibus-DP	• Modbus / RS-485 • Profibus-DP	• Modbus / RS-485 • Profibus-DP
Power supply	• Self Power - Power source works over 25% of current of In (one pole)	• Self Power - Power source works over 25% of current of In (one pole) - External power source are required for comm. • AC/DC 100~250V • DC 24~60V	• AC/DC 100~250V • DC 24~60V * Basic protection function (L / S / I / G) is still under normal operation without control power.	• AC/DC 100~250V • DC 24~60V * Basic protection function (L / S / I / G) is still under normal operation without control power.
RTC timer	• Available	• Available	• Available	• Available
LED for trip info.	• Long time delay • Short time delay/Instantaneous • Ground fault	• N type	• N type	• N type
Fault recording	-	• 10 records (Fault/Current/Date and Time)	• 256 records (Fault/Current/Date and Time)	• 256 records • Last fault wave recording (3 Phase)
Event recording	-	-	• 256 records(Content, Status, Date)	• P type
Operating button	• Reset button	• Reset, Menu Up/Down, Left/Right, Enter	• A type	• A type

Molded Case Circuit Breakers

Metasol 30AF to 250AF Series

Frame Size(AF)		30	50		60	
Type		S-Type	N-Type	S-Type	H-Type	N-Type S-Type
Type and Pole	2 pole	ABS32c	ABN52c	ABS52c	ABH52c	ABN62c ABS62c
	3 pole	ABS33c	ABN53c	ABS53c	ABH53c	ABN63c ABS63c
	4 pole	ABS34c	ABN54c	ABS54c	ABH54c	ABN64c ABS64c
Rated current, In	(A)	(3, 5, 10) 15, 20, 30	15, 20, 30, 40, 50		15, 20, 30, 40, 50	15, 20, 30, 40, 50, 60
Rated operational voltage, Ue	AC(V)	690	690	690	690	690 690
	DC(V)	500	500	500	500	500 500
Rated insulation voltage, Ui	(V)	1000	1000	1000	1000	1000 1000
Rated impulse withstand voltage, Uimp	(kV)	8	8	8	8	8 8
Rated short-circuit breaking capacity(Icu) kA (Sym), KSC8321, IEC 60947-2						
AC	690V	2.5	2.5	5	10	2.5 5
	480/500V	7.5	7.5	10	35	7.5 10
	415/460V	14 (10)	14	18	50	14 18
	380V	18 (14)	18	22	50	18 22
	220/250V	30 (25)	30	35	100	30 35
DC	500V(3P)	5	5	10	30	5 10
	250V(2P)	5	5	10	30	5 10
Service breaking capacity(%Icu), Ics		100	100	100	100	100 100
Category of use		A	A	A	A	A A
Endurance (Number of operations)	Mechanical	25,000	25,000	25,000	25,000	25,000 25,000
	Electrical	10,000	10,000	10,000	10,000	10,000 10,000
Type of trip unit						
Thermal-magnetic release		fixed	fixed	fixed	fixed	fixed fixed
Hydraulic-magnetic release		-	-	-	-	- -
Magnetic release only without thermal trip						
Earth leakage protection	for 3 pole	▲	▲	▲	▲	▲ ▲
Accessories						
Electrical auxiliaries	Auxiliary switch	●	●	●	●	● ●
	Alarm switch	●	●	●	●	● ●
	Shunt trip	●	●	●	●	● ●
	Undervoltage trip	●	●	●	●	● ●
External accessories	Direct rotary handle	●	●	●	●	● ●
	Extended rotary handle	●	●	●	●	● ●
	Terminal shield	●	●	●	●	● ●
	Insulation barrier	●	●	●	●	● ●
	Rear connection	●	●	●	●	● ●
	Pad handle lock	●	●	●	●	● ●
	Plug-in device	●	●	●	●	● ●
Dimensions (mm)	W×H×D (3P)	75×130×60	75×130×60		90×155×60	75×130×60
Weight(kg)	2 pole	0.5	0.5	0.5	0.7	0.5 0.5
	3 pole	0.7	0.7	0.7	1	0.7 0.7
	4 pole	0.9	0.9	0.9	1.2	0.9 0.9

Note) 1. ● applicable or available

2. ▲ available as a separate breaker

3. The Ics(service breaking capacity) of ABN100e, ABL125/250AF are in ()



100		125			250			
N-Type		S-Type	H-Type	L-Type	N-Type	S-Type	H-Type	L-Type
ABN102c	ABN102e	ABS102c	ABH102c	ABL102c	ABN202c	ABS202c	ABH202c	ABL202c
ABN103c	ABN103e	ABS103c	ABH103c	ABL103c	ABN203c	ABS203c	ABH203c	ABL203c
ABN104c	ABN104e	ABS104c	ABH104c	ABL104c	ABN204c	ABS204c	ABH204c	ABL204c
15, 20, 30, 40, 50, 60, 75, 100		15, 20, 30, 40, 50, 60, 75, 100, 125			100, 125, 150, 175, 200, 225, 250			
690		690	690	690	690	690	690	690
500		500	500	500	500	500	500	500
1000		1000	1000	1000	1000	1000	1000	1000
8		8	8	8	8	8	8	8
5	7.5 (5)	8	10	10 (10)	8	8	10	10 (10)
10	14 (10)	25	35	35 (35)	18	26	35	35 (35)
18	31 (18)	37	50	60 (50)	26	37	50	60 (50)
22	31 (22)	42	50	60 (50)	30	42	50	60 (50)
35	50 (35)	85	100	100 (100)	65	85	100	100 (100)
10	15 (10)	20	30	30 (30)	10	20	30	30 (30)
10	15 (10)	20	30	30 (30)	10	20	30	30 (30)
100	()	100	100	()	100	100	100	()
A	A	A	A	A	A	A	A	A
25,000	25,000	25,000	25,000	25,000	25,000	25,000	25,000	25,000
10,000	10,000	10,000	10,000	10,000	5,000	5,000	5,000	5,000
fixed	fixed	fixed	fixed	fixed	fixed	fixed	fixed	fixed
-	-	-	-	-	-	-	-	-
▲	▲	▲	▲	▲	▲	▲	▲	▲
●	●	●	●	●	●	●	●	●
●	●	●	●	●	●	●	●	●
●	●	●	●	●	●	●	●	●
●	●	●	●	●	●	●	●	●
●	●	●	●	●	●	●	●	●
●	●	●	●	●	●	●	●	●
●	●	●	●	●	●	●	●	●
●	●	●	●	●	●	●	●	●
●	●	●	●	●	●	●	●	●
●	●	●	●	●	●	●	●	●
●	●	●	●	●	●	●	●	●
75×130×60		90×155×60			105×165×60			
0.5	0.5	0.7	0.7	0.7	1.1	1.1	1.1	1.1
0.7	0.7	1	1	1	1.2	1.2	1.2	1.2
0.9	0.9	1.2	1.2	1.2	1.6	1.6	1.6	1.6

Calibrated for 40°C	Amb. Temp.	-5°C	0°C	10°C	20°C	25°C	30°C	35°C	40°C	45°C	50°C
	In=15 to 30	111.9%	111.3%	110.0%	108.0%	106.6%	104.9%	102.7%	100.0%	96.8%	93.3%
	In=40 to 100	110.2%	109.8%	108.7%	107.0%	105.8%	104.3%	102.4%	100.0%	97.2%	94.0%
	In=100 to 225	114.3%	113.2%	110.6%	107.5%	105.8%	104.0%	102.0%	100.0%	97.9%	95.6%
	In=250 to 800	110.0%	109.0%	107.0%	105.0%	104.0%	103.0%	101.5%	100.0%	98.5%	97.0%

Molded Case Circuit Breakers

Metasol 400AF to 1200AF Series

Frame Size(AF)		400			
Type		N-Type	S-Type	H-Type	L-Type
Type and Pole	2 pole	ABN402c	ABS402c	ABH402c	ABL402c
	3 pole	ABN403c	ABS403c	ABH403c	ABL403c
	4 pole	ABN404c	ABS404c	ABH404c	ABL404c
Rated current, In	(A)	250, 300, 350, 400			
Rated operational voltage, Ue	AC(V)	690	690	690	690
	DC(V)	500	500	500	500
Rated insulation voltage, Ui	(V)	1000	1000	1000	1000
Rated impulse withstand voltage, Uimp	(kV)	8	8	8	8
Rated short-circuit breaking capacity(Icu) kA (Sym), KSC8321, IEC 60947-2					
AC	690V	5	8	10	14
	480/500V	18	35	50	65
	415/460V	37	50	65	85
	380V	42	65	70	100
	220/250V	50	75	85	125
DC	500V(3P)	10	20	40	40
	250V(2P)	10	20	40	40
Service breaking capacity(%Icu), Ics		100	100	100	75
Category of use		A	A	A	A
Endurance (Number of operations)	Mechanical	4,000	4,000	4,000	4,000
	Electrical	1,000	1,000	1,000	1,000
Type of trip unit					
Thermal-magnetic release		fixed	fixed	fixed	fixed
Hydraulic-magnetic release		-	-	-	-
Magnetic release only without thermal trip		-	-	-	-
Earth leakage protection	for 3 pole	▲	▲	▲	▲
Accessories					
Electrical auxiliaries	Auxiliary switch	●	●	●	●
	Alarm switch	●	●	●	●
	Shunt trip	●	●	●	●
	Undervoltage trip	●	●	●	●
External accessories	Direct rotary handle	●	●	●	●
	Extended rotary handle	●	●	●	●
	Terminal shield	●	●	●	●
	Insulation barrier	●	●	●	●
	Rear connection	●	●	●	●
	Mechanical interlock	●	●	●	●
	Plug-in device	●	●	●	●
Dimensions (mm)	W×H×D (3P)	140×257×109			
Weight(kg)	2 pole	5.2	5.2	5.2	5.2
	3 pole	6.2	6.2	6.2	6.2
	4 pole	7.8	7.8	7.8	7.8

Note) 1. ● applicable or available
2. ▲ available as a separate breaker



800			1000		1200		
N-Type	S-Type	L-Type	S-Type	L-Type	S-Type		L-Type
ABN802c	ABS802c	ABL802c	-	-	-	-	-
ABN803c	ABS803c	ABL803c	ABS1003b	ABL1003b	ABS1203b	ABS1203bE	ABL1203b
ABN804c	ABS804c	ABL804c	ABS1004b	ABL1004b	ABS1204b	-	ABL1204b
500, 630, 700, 800			1000		1200		
690	690	690	600	600	600	600	600
500	500	500	-	-	-	-	-
1000	1000	1000	690	690	690	690	690
8	8	8	6	6	6	6	6
8	10	14	-	-	-	-	-
25	45	65	50	75	50	50	75
37	65	85	65	85	65	65	85
45	75	100	65	85	65	65	85
50	85	125	100	125	100	100	125
10	20	40	-	-	-	-	-
10	20	40	-	-	-	-	-
100	100	75	50	50	50	50	50
A	A	A	A	A	A	A	A
2,500	2,500	2,500	2,500	2,500	2,500	2,500	2,500
500	500	500	500	500	500	500	500
fixed	fixed	fixed	fixed	fixed	fixed	-	fixed
-	-	-	-	-	-	Adjustable	-
-	-	-	-	-	-	-	-
▲	▲	▲	-	-	-	●	-
●	●	●	●	●	●	●	●
●	●	●	●	●	●	●	●
●	●	●	●	●	●	●	●
●	●	●	-	-	-	-	-
●	●	●	-	-	-	-	-
●	●	●	-	-	-	-	-
●	●	●	●	●	●	●	●
●	●	●	●	●	●	●	●
●	●	●	-	-	-	-	-
●	●	●	-	-	-	-	-
210×280×109			220×400×105		220×400×105		
11	11	11	-	-	-	-	-
11.5	11.5	11.5	19.6	19.6	-	-	-
18.2	18.2	18.2	-	-	25.7	25.7	25.7

Calibrated for 40°C	Amb. Temp.	-5°C	0°C	10°C	20°C	25°C	30°C	35°C	40°C	45°C	50°C
	In=15 to 30	111.9%	111.3%	110.0%	108.0%	106.6%	104.9%	102.7%	100.0%	96.8%	93.3%
	In=40 to 100	110.2%	109.8%	108.7%	107.0%	105.8%	104.3%	102.4%	100.0%	97.2%	94.0%
	In=100 to 225	114.3%	113.2%	110.6%	107.5%	105.8%	104.0%	102.0%	100.0%	97.9%	95.6%
	In=250 to 800	110.0%	109.0%	107.0%	105.0%	104.0%	103.0%	101.5%	100.0%	98.5%	97.0%

Earth Leakage Circuit Breakers

Metasol 30AF to 250AF Series

Frame Size(AF)			30	50		
Type			S-type	N-type	S-type	H-type
Type and pole		2-pole	EBS32c	EBN52c	-	-
		3-pole	EBS33c	EBN53c	EBS53c	EBH53c
		4-pole	EBS34c	-	EBS54c	EBH54c
Protective function			Overload, short-circuit and ground fault	Overload, short-circuit and ground fault		Overload, short-circuit and ground fault
Rated current, In		(A)	(5, 10) ^{Note 2)} , 15, 20, 30	15, 20, 30, 40, 50		15, 20, 30, 40, 50
Rated impulse withstand voltage, Uimp		(kV)	6	6		6
Instantaneous type	Rated residual current, I△n	(mA)	30, 100, 100/200/500 100/300/500	30, 100, 100/200/500, 100/300/500		30, 100, 100/200/500 100/300/500
	Residual current off-time at I△n	sec	≤ 0.1	≤ 0.1		≤ 0.1
	Rated operational voltage, Ue	AC (V)	220/460	220/460		220/460
Time delay type	Rated residual current	1A	0.1/0.2/0.5/1	0.1/0.2/0.5/1		0.1/0.2/0.5/1
	Intentional time delay	1s	0/0.2/0.5/1	0/0.2/0.5/1		0/0.2/0.5/1
	Rated residual current	2A	0.1/0.4/1/2	0.1/0.4/1/2		0.1/0.4/1/2
	Intentional time delay	2s	0.5/1/1.5/2	0.5/1/1.5/2		0.5/1/1.5/2
Rated short-circuit breaking capacity (Icu) kA (Sym), KSC8321, IEC 60947-2						
AC		460V	14 (10)	14	18	50
		415V	14 (10)	14	18	50
		220/250V	30 (25)	30	35	100
Service breaking capacity(%Icu), Ics			100	100	100	100
Category of use			A	A	A	A
Endurance	Mechanical		25,000	25,000	25,000	25,000
(Number of operations)	Electrical		10,000	10,000	10,000	10,000
Type of trip unit						
Overcurrent pick-up			Thermal-magnetic	Thermal-magnetic		
Earth leakage pick-up			Electronic	Electronic		
Accessories						
Electrical auxiliaries	Auxiliary switch		●	●	●	●
	Alarm switch		●	●	●	●
External accessories	Insulation barrier		●	●	●	●
	Terminal cover (Long)		●	●	●	●
	Terminal cover (Short)		●	●	●	●
	Rotary handle (Direct)		●	●	●	●
	Rotary handle (Direct, Key lock)		●	●	●	●
	Rotary handle (Extended)		●	●	●	●
	Rear terminal (Bar)					●
	Rear terminal (Round)		●	●	●	●
	Plug-in kit		●	●	●	●
	Pad handle lock		●	●	●	●
Dimensions (mm)	W×H×D (3P)		75×130×60	75×130×60		90×155×60
Weight(kg)	2 pole		-	0.5	-	-
	3 pole		0.7	0.7	0.7	1
	4 pole		0.9	-	0.9	1.2

Note) 1. ● applicable or available

2. The short-circuit breaking capacities in () are applied to the rated current in (5, 10A)



	60		100	125		250		
	N-type	S-type	N-type	S-type	H-type	N-type	S-type	H-type
	-	-	EBN102c	-	-	EBN202c	-	-
	EBN63c	EBS63c	EBN103c	EBS103c	EBH103c	EBN203c	EBS203c	EBH203c
	-	EBS64c	EBN104c	EBS104c	EBH104c	-	EBS204c	EBH204c
	Overload, short-circuit and ground fault		Overload, short-circuit and ground fault	Overload, short-circuit and ground fault		Overload, short-circuit and ground fault		
	60		60, 75, 100	15, 20, 30, 40, 50, 60, 75, 100, 125		100, 125, 150, 175, 200, 225, 250		
	6		6	6		6		
	30, 100, 100/200/500, 100/300/500		30, 100, 100/200/500, 100/300/500	30, 100, 100/200/500, 100/300/500		30, 100, 100/200/500, 100/300/500		
	≤ 0.1		≤ 0.1	≤ 0.1		≤ 0.1		
	220/460		220/460	220/460		220/460		
	0.1/0.2/0.5/1		0.1/0.2/0.5/1	0.1/0.2/0.5/1		0.1/0.2/0.5/1		
	0/0.2/0.5/1		0/0.2/0.5/1	0/0.2/0.5/1		0/0.2/0.5/1		
	0.1/0.4/1/2		0.1/0.4/1/2	0.1/0.4/1/2		0.1/0.4/1/2		
	0.5/1/1.5/2		0.5/1/1.5/2	0.5/1/1.5/2		0.5/1/1.5/2		
	14	18	18	37	50	26	37	50
	14	18	18	37	50	26	37	50
	30	35	35	85	100	65	85	100
	100	100	100	100	100	100	100	100
	A	A	A	A	A	A	A	A
	25,000	25,000	25,000	25,000	25,000	20,000	20,000	20,000
	10,000	10,000	10,000	10,000	10,000	5,000	5,000	5,000
	Thermal-magnetic		Thermal-magnetic	Thermal-magnetic		Thermal-magnetic		
	Electronic		Electronic	Electronic		Electronic		
	●	●	●	●	●	●	●	●
	●	●	●	●	●	●	●	●
	●	●	●	●	●	●	●	●
	●	●	●	●	●	●	●	●
	●	●	●	●	●	●	●	●
	●	●	●	●	●	●	●	●
	●	●	●	●	●	●	●	●
	●	●	●	●	●	●	●	●
	●	●	●	●	●	●	●	●
	●	●	●	●	●	●	●	●
	●	●	●	●	●	●	●	●
	●	●	●	●	●	●	●	●
	75×130×60		75×130×60	90×155×60		105×165×60		
	-	-	0.5	-	-	1.1	-	-
	0.7	0.7	0.7	1	1	1.2	1.2	1.2
	-	0.9	0.9	1.2	1.2	-	1.5	1.5

Earth Leakage Circuit Breakers

Metasol 400AF to 1200AF Series

Frame Size(AF)		400			
Type		N-Type	S-Type	H-Type	L-Type
Type and Pole	3-pole	EBN403c	EBS403c	EBH403c	EBL403c
	4-pole	EBN404c	EBS404c	EBH404c	EBL404c
Protective function		Overload, Short-circuit and Ground fault			
Rated current, I _n	(A)	250, 300, 350, 400			
Rated residual current, I _{Δn}	(mA)	30, 100/200/500mA			
Rated operational voltage, U _e	AC (V)	220/460	220/460	220/460	220/460
Rated impulse withstand voltage, U _{imp}	(kV)	6	6	6	6
Residual current off-time at I _{Δn}	sec	≤ 0.1	≤ 0.1	≤ 0.1	≤ 0.1
Rated short-circuit breaking capacity (I _{cu}) kA (Sym), KSC8321, IEC 60947-2					
AC	415/460V	37	50	65	85
	220/250V	50	75	85	125
Service breaking capacity(%I _{cu}), I _{cs}		100	100	100	75
Category of use		A	A	A	A
Endurance	Mechanical	4,000	4,000	4,000	4,000
(Number of operations)	Electrical	1,000	1,000	1,000	1,000
Type of trip unit					
Overcurrent pick-up		Thermal-magnetic			
Earth leakage pick-up		Electronic			
Accessories					
Electrical auxiliaries	Auxiliary switch	●	●	●	●
	Alarm switch	●	●	●	●
	Shunt trip	●	●	●	●
	Undervoltage trip	●	●	●	●
External accessories	Insulation barrier	●	●	●	●
	Terminal cover (Long) - 2, 3 pole	●	●	●	●
	Terminal cover (Long) - 4 pole	●	●	●	●
	Rotary handle (Direct)	●	●	●	●
	Rotary handle (Extended)	●	●	●	●
	Mechanical interlock - 2, 3 pole	●	●	●	●
	Mechanical interlock - 4 pole	●	●	●	●
	Rear terminal - 2 pole	●	●	●	●
	Rear terminal - 3 pole	●	●	●	●
	Rear terminal - 4 pole	●	●	●	●
	Plug-in kit	●	●	●	●
Dimensions (mm)	W×H×D (3P)	140×257×109			
Weight(kg)	2 pole	-	-	-	-
	3 pole	7	7	7	7
	4 pole	8.4	8.4	7	7

Note) 1. ● applicable or available



800				1000	1200
N-Type	S-Type	L-Type		S-Type	S-Type
EBN803c	EBS803c	EBL803c		EBS1003b	EBS1203b
-	-	-		-	-
Overload, Short-circuit and Ground fault				Overload, Short-circuit and Ground fault	
500, 630, 700, 800				1000	1200
30, 100/200/500mA				100/200/500mA	100/200/500mA
220/460	220/460	220/460		220/460	220/460
6	6	6		-	-
≤ 0.1	≤ 0.1	≤ 0.1		≤ 0.1	≤ 0.1
37	65	85		85	85
50	85	125		125	125
100	100	75		-	-
A	A	A		-	-
2,500	2,500	2,500		2,500	2,500
500	500	500		500	500
Thermal-magnetic				Thermal-magnetic	Thermal-magnetic
Electronic				Electronic	Electronic
•	•	•		•	•
•	•	•		•	•
•	•	•		-	-
•	•	•		-	-
•	•	•		-	-
•	•	•		-	-
•	•	•		-	-
•	•	•		-	-
•	•	•		-	-
•	•	•		-	-
•	•	•		-	-
•	•	•		-	-
•	•	•		-	-
•	•	•		-	-
210×280×109				220×565×105	
-	-	-		-	-
11.5	11.5	11.5		27.1	27.1
-	-	-		-	-

Air Circuit Breakers

Susol ACB Series

Circuit Breaker



Frame				AH-D						
Type				AH-06D	AH-08D	AH-10D	AH-13D	AH-16D	AH-20D	
Ampere frame		(AF)		630	800	1000	1250	1600	2000	
Rated current(A)	(In max)		at 40℃	200	400	1000	1250	1600	2000	
				400	630					
				630	800					
				(0.4 ~ 1.0) × In max						
Setting current (A)		Control trip relay (... × In max)		400 630	400 630 800	1000	1250	1600	2000	
Rated current of neutral pole (A)										
Rated insulation voltage(V)		(Ui)		1,000						
Rated operational voltage(V)		(Ue)		690						
Rated impulse withstand voltage (kV)		(Uimp)		12						
Frequency(Hz)				50/60						
Number of poles (P)				3/4						
Rated breaking capacity (kA sym)		(Icu)	IEC 60947-2 KS C 4620	220V/230V/380V/415V		85				
AC 50/60Hz				460V/480V/500V		85				
				550V/600V/690V		65				
Rated service breaking capacity (kA)		(Ics)		... %×Icu		100%				
Rated making capacity (kA peak)		(Icm)	IEC 60947-2 KS C 4620	220V/230V/380V/415V		187				
AC 50/60Hz				460V/480V/500V		187				
				550V/600V/690V		143				
Rated short-time withstand current (kA)		(Icw)		1 sec		65				
				2 sec		60				
				3 sec		50				
Operating time (ms)				Maximum total breaking time		40				
				Maximum closing time		80				
Life cycle (time)		Mechanical		20,000						
		Electrical		5,000						
Connections	Draw-out / Fixed			Horizontal connection		● ○ ○ ○				- ● - -
				Vertical connection						
				Front connection						
				Mixed connection						
Weight (kg) (3P/4P)	Draw-out type	Main body (With cradle)	Motor charging type		63/74				70/85	
			Manual charging type		61/72				68/83	
	Fixed type	Cradle only			29/32				33/40	
					34/44				38/47	
				Motor charging type		32/42				36/45
				Manual charging type						
External dimensions (mm)			Draw-out type	3P		430×334×375				
(H×W×D)				4P		430×419×375				
			Fixed type	3P		300×300×295				
				4P		300×385×295				
Trip relay				N, A, P, S type						
Certificate & Approval				KS / KEMA / KERI / GOST / CCC						
Marine clasiflcation				LR, ABS, DNV, KR, BV, GL, RINA, NK						

Note) 1. Life time means not guarantee, but limitation.

Quality guarantee: On/Off frequency on the basis of IEC60947-2 within the term of guarantee

2. In case of Marine ACB, please contact us.

3. The use of AN-D, AS-D, AH-D and AS-F in IT systems is limited to 500 V network voltage.

4. AH-20D, AH-40E types are equipped with vertical-only terminals.



AH-E								
AH-06E	AH-08E	AH-10E	AH-13E	AH-16E	AH-20E	AH-25E	AH-32E	AH-40E
630	800	1000	1250	1600	2000	2500	3200	4000
630	800	1000	1250	1600	2000	2500	3200	4000
(0.4 ~ 1.0) × In max								
630	800	1000	1250	1600	2000	2500	3200	4000
				1,000				
				690				
				12				
				50/60				
				3/4				
				100				
				100				
				85				
				100%				
				220				
				220				
				187				
				85				
				75				
				65				
				40				
				80				
				15,000				
				5,000				
				●				-
				○				●
				○				-
				○				-
				87/103				107/139
				85/101				102/145
				44/55				65/85
				44/55				61/81
				42/53				60/80
				430×412×375				
				430×527×375				
				300×378×295				
				300×493×295				
				N, A, P, S type				
				KS / KEMA / KERI / GOST / CCC				
				LR, ABS, DNV, KR, BV, GL, RINA, NK				

AH-G		
AH-40G	AH-50G	AH-63G
4000	5000	6300
4000	5000	6300
(0.4 ~ 1.0) × In max		
4000	5000	6300
1,000		
690		
12		
50/60		
3/4		
150		
150		
100		
100%		
330		
330		
220		
100		
85		
75		
40		
80		
10,000		
2,000		
○		
●		
-		
-		
181/223		186/230
179/221		184/228
97/117		102/124
98/123		103/130
96/121		101/128
460×785×375		
460×1015×375		
300×751×295		
300×981×295		
N, A, P, S type		
KS / KEMA / KERI / GOST / CCC		
LR, ABS, DNV, KR, BV, GL, RINA, NK		

※ Derating of the rated current is required according to the ambient temperature around the breaker in a panel if it is higher than the reference value.

Air Circuit Breakers

Susol ACB Series

Switch-Disconnecter



Frame				DH-D					
Type				DH-06D	DH-08D	DH-10D	DH-13D	DH-16D	DH-20D
Ampere frame	(AF)			630	800	1000	1250	1600	2000
Rated current(A)	(In max) at 40℃			200	400	1000	1250	1600	2000
				400	630				
				630	800				
				(0.4 ~ 1.0) × In max					
Setting current (A) *	Control trip relay (... × In max)			400 630	400 630 800	1000	1250	1600	2000
Rated current of neutral pole (A)									
Rated insulation voltage(V)	(Ui)								
Rated operational voltage(V)	(Ue)								
Rated impulse withstand voltage (kV)	(Uimp)			12					
Frequency(Hz)				50/60					
Number of poles (P)				3/4					
Rated service breaking capacity (kA)	(Ics)	... % × Icu		100%					
Rated making capacity (kA peak)	(Icm)	IEC 60947-3 AC		143					
Rated short-time withstand current (kA)	(Icw)		1 sec	65					
			2 sec	60					
			3 sec	50					
Operating time (ms)			Maximum total breaking time	40					
			Maximum closing time	80					
Life cycle (time)	Mechanical		20,000						
	Electrical		5,000						
Connections **	Draw-out / Fixed		Horizontal connection	●					-
			Vertical connection	○					●
			Front connection	○					-
			Mixed connection	○					-
Weight (kg) (3P/4P)	Draw-out type	Main body (With cradle)	Motor charging type	63/74					70/85
			Manual charging type	61/72					68/83
				29/32					33/40
	Fixed type		Motor charging type	34/44					38/47
			Manual charging type	32/42					36/45
External dimensions (mm) (H×W×D)		Draw-out type	3P	430×334×375					
			4P	430×419×375					
		Fixed type	3P	300×300×295					
			4P	300×385×295					
Trip relay			N, A, P, S type						

Note) 1. Life time means not guarantee, but limitation.

Quality guarantee: On/Off frequency on the basis of IEC60947-3 within the term of guarantee

2. In case of Marine ACB, please contact us.

3. DH-20D, DH-40E types are equipped with vertical-only terminals.



DH-E								
DH-06E	DH-08E	DH-10E	DH-13E	DH-16E	DH-20E	DH-25E	DH-32E	DH-40E
630	800	1000	1250	1600	2000	2500	3200	4000
630	800	1000	1250	1600	2000	2500	3200	4000
(0.4 ~ 1.0) × In max								
630	800	1000	1250	1600	2000	2500	3200	4000
1,000								
690								
12								
50/60								
3/4								
100%								
187								
85								
78								
65								
40								
80								
15,000								
5,000								
			●					-
			○					●
			○					-
			○					-
			87/103					107/139
			85/101					102/145
			44/55					65/85
			44/55					61/81
			42/53					60/80
430×412×375								
430×527×375								
300×378×295								
300×493×295								
N, A, P, S type								

※ Derating of the rated current is required according to the ambient temperature around the breaker in a panel if it is higher than the reference value.

Air Circuit Breakers

Metasol ACB Series

Circuit Breaker



Frame				AN-D				
Type				AN-06D	AN-08D	AN-10D	AN-13D	AN-16D
Ampere frame	(AF)			630	800	1000	1250	1600
Rated current (A)	(In max) at 40			200 400 630	400 630 800	1000	1250	1600
Setting current (A)*	Control trip relay (... × In max)			0.4 ~ 1.0				
Rated current of neutral pole (A)				400 630	400 630 800	1000	1250	1600
Rated insulation voltage (V)	(Ui)			1,000				
Rated operational voltage (V)	(Ue)			690				
Rated impulse withstand voltage (kV) (Uimp)				12				
Frequency (Hz)				50/60				
Number of poles (P)				3/4				
Rated breaking capacity (kA sym)				65				
AC 50/60Hz	(Icu) IEC 60947-2 KS C 4620			65				
				550V/600V/690V				
Rated service breaking capacity (kA) (Ics)	... %×Icu			100%				
Rated making capacity (kA peak)				143				
AC 50/60Hz	(Icm) IEC 60947-2 KS C 4620			143				
				550V/600V/690V				
Rated short-time withstand current (kA) (Icw)	1 sec			50				
	2 sec			42				
	3 sec			36				
Operating time (ms)	Maximum total breaking time			40				
	Maximum closing time			80				
Life cycle (time)	Mechanical			20,000				
	Electrical			5,000				
Connections*	Draw-out / Fixed			●				
				○				
				○				
				○				
Weight (kg) (3P/4P)	Draw-out type			63/74				
	Main body (With cradle)			61/72				
	Cradle only			29/32				
	Fixed type			34/44				
				32/42				
External dimensions (mm) (H×W×D)	Draw-out type			430×334×375				
	4P			430×419×375				
	Fixed type			300×300×295				
	4P			300×385×295				
Trip relay				N, A, P type				
Certificate & Approval				KS / KEMA / KERI / GOST				
Marine classification				-				

Note) 1. Life time means not guarantee, but limitation.
 Quality guarantee: On/Off frequency on the basis of IEC60947-2 within the term of guarantee
 2. The use of AN-D, AS-D and AS-F in IT systems is limited to 500 V network voltage.
 3. AS-20D, AS-40E types are equipped with vertical-only terminals.



AS-D						AS-E				AS-F		AS-G		
AS-06D	AS-08D	AS-10D	AS-13D	AS-16D	AS-20D	AS-20E	AS-25E	AS-32E	AS-40E	AS-40F	AS-50F	AS-40G	AS-50G	AS-63G
630	800	1000	1250	1600	2000	2000	2500	3200	4000	4000	5000	4000	5000	6300
200	400	1000	1250	1600	2000	630, 800	2500	3200	4000	4000	5000	4000	5000	6300
400	1000, 1250													
630	1600, 2000													
0.4 ~ 1.0						0.4 ~ 1.0				0.4 ~ 1.0		0.4 ~ 1.0		
630	800	1000	1250	1600	2000	630, 800 1000, 1250 1600, 2000	2500	3200	4000	4000	5000	4000	5000	6300
1,000						1,000				1,000		1,000		
690						690				690		690		
12						12				12		12		
50/60						50/60				50/60		50/60		
3/4						3/4				3/4		3/4		
70						85				100		120		
70						85				100		120		
65						85				85		100		
100%						100%				100%		100%		
154						187				220		264		
154						187				220		264		
143						187				187		220		
65						85				85		100		
50						75				75		85		
42						65				65		75		
40						40				40		40		
80						80				80		80		
20,000						15,000				10,000		10,000		
5,000						5,000				2,000		2,000		
●					-	●			-	○		○		
○					●	○			●	●		●		
○					-	○			-	-		-		
○					-	○			-	-		-		
63/74					70/85	87/103			104/147	107/139		181/223		186/230
61/72					63/83	85/101			102/145	102/145		179/221		184/228
29/32					33/40	44/50			58/70	65/85		97/117		102/124
34/44					38/47	44/55			63/100	61/81		98/123		103/130
32/42					36/45	42/53			61/98	60/80		96/121		101/128
430×334×375						430×412×375				460×629×375		460×785×375		
430×419×375						430×527×375				460×799×375		460×1015×375		
300×300×295						300×378×295				300×597×295		300×751×295		
300×385×295						300×493×295				300×767×295		300×981×295		
N, A, P type						N, A, P type				N, A, P type		N, A, P type		
KS / KEMA / KERI / GOST						KS / KEMA / KERI / GOST				KS / KEMA / KERI / GOST				
LR, ABS, DNV, KR, BV, GL, RINA, NK						LR, ABS, DNV, KR, BV, GL, RINA, NK				LR, ABS, DNV, KR, BV, GL, RINA, NK				

※ Derating of the rated current is required according to the ambient temperature around the breaker in a panel if it is higher than the reference value.

Air Circuit Breakers

Metasol ACB Series

Switch-Disconnecter



Frame				DN-D				
Type				DN-06D	DN-08D	DN-10D	DN-13D	DN-16D
Ampere frame	(AF)			630	800	1000	1250	1600
Rated current (A)	(In max)	at 40°C		200	400	1000	1250	1600
				400	630			
				630	800			
Setting current *	(A)	Control trip relay (... × In max)		0.4~1.0				
Rated current of neutral pole	(A)							
				630	800	1000	1250	1600
Rated insulation voltage (V)	(Ui)			1000				
Rated operational voltage (V)	(Ue)			690				
Rated impulse withstand voltage (kV)	(Uimp)			12				
Frequency	(Hz)			50/60				
Number of poles	(P)			3/4				
Rated service breaking capacity (kA)	(Ics)	... %×Icu		100%				
Rated making capacity (kA peak)	(Icm)	IEC 60947-3 AC 690V / 600V / 550V		105				
Rated short-time withstand current (kA)	(Icw)	1 sec		50				
		2 sec		42				
		3 sec		36				
Operating time (t)	(ms)	Total breaking time		40				
		Closing time		80				
Life cycle	(time)	Mechanical		20000				
		Electrical		5000				
Connections **	Draw-out type/ Fixed type	Horizontal connection		●	●	●	●	●
		Vertical connection		○	○	○	○	○
		Front connection		○	○	○	○	○
		Mixed connection		○	○	○	○	○
Weight (kg) (3P/4P)	Draw-out type	Main body	Motor charging type	63/74				
		(With cradle)	Manual charging type	61/72				
		Cradle only		29/32				
	Fixed type		Motor charging type	34/44				
External dimensions (mm) (H×W×D)			Manual charging type	32/42				
		Draw-out type	3P	430×334×375				
			4P	430×419×375				
		Fixed type	3P	300×300×295				
			4P	300×385×295				

Note) 1. Life time means not guarantee, but limitation.

Quality guarantee: On/Off frequency on the basis of IEC60947-3 within the term of guarantee

2. DS-20D, DS-40E types are equipped with vertical-only terminals.



DS-D					
DS-06D	DS-08D	DS-10D	DS-13D	DS-16D	DS-20D
630	800	1000	1250	1600	2000
200	400	1000	1250	1600	2000
400	630				
630	800				
0.4~1.0					
630	800	1000	1250	1600	2000
1000					
690					
12					
50/60					
3/4					
100%					
143					
65					
50					
42					
40					
80					
20000					
5000					
●	●	●	●	●	-
○	○	○	○	○	●
○	○	○	○	○	-
○	○	○	○	○	-
63/74					70/85
61/72					68/83
29/32					33/40
34/44					38/47
32/42					36/45
430×334×375					
430×419×375					
300×300×295					
300×385×295					

DS-E			
DS-20E	DS-25E	DS-32E	DS-40E
2000	2500	3200	4000
630, 800, 1000, 1250, 1600, 2000	2500	1000	1250
0.4~1.0			
630, 800, 1000, 1250, 1600, 2000	2500	3200	4000
1000			
690			
12			
50/60			
3/4			
100%			
187			
85			
75			
65			
40			
80			
15000			
5000			
●	●	●	-
○	○	○	●
○	○	○	-
○	○	○	-
87/103			107/139
85/101			102/145
44/50			65/85
44/55			61/81
42/53			60/80
430×412×375			
430×527×375			
300×378×295			
300×493×295			

※ Derating of the rated current is required according to the ambient temperature around the breaker in a panel if it is higher than the reference value.

Trip relay(OCR)

The trip relay of Susol ACB provides the additional protection functions for voltage, frequency, unbalance, and others in addition to main protection functions for over current, short-circuit, ground fault. It supports the advanced measurement functions for voltage, current, power, electric energy, harmonics, communication function, and others.

Analog trip function interlocked with mechanism enhanced a durability of devices as well as the breaking capacity of ACB.

Zone selective interlocking function makes the protective coordination more simple and thermal memory can be applied to various loads.



Trip relay types

Classification	N type	A type	P type	S type
Externals				
Current protection	• L / S / I / G / Thermal	• L / S / I / G(or EL) • Thermal • ZSI (Protective coordination)	• L / S / I / G(or EL) • Thermal (linear hot start) • ZSI (Protective coordination)	• L / S / I / G(or EL) • Thermal (linear hot start) • ZSI (Protective coordination)
Other protection	-	-	• Over/Under voltage • Over/Under frequency • Unbalance(Voltage/Current) • Reverse power • Reverse power	• Over/Under voltage • Over/Under frequency • Unbalance(Voltage/Current)
Measurement function	-	• Current (R / S / T / N)	• 3 Phase Voltage/Current RMS/Vector • Power(P, Q, S), PF(3-Phase) • Energy(Positive/Negative) • Frequency, Demand	• 3 Phase Voltage/Current RMS/Vector • Power(P, Q, S), PF(3-Phase) • Energy(Positive/Negative) • Frequency, Demand • Voltage/Current harmonics (1st~63th) • 3 Phase Waveforms • THD, TDD, K-Factor
Fine adjustment	-	-	• Fine adjustment for long/short time delay/instantaneous/ground	• Fine adjustment for long/short time delay/instantaneous/ground
Pre Trip Alarm	-	-	• Overload protection relays : DO (Alarm) (Ground fault is not available when using Pre trip alarm)	• Overload protection relays : DO (Alarm) (Ground fault is not available when using Pre trip alarm)
Digital Output	-	• 3DO (Fixed) • L, S/I, G Alarm	• 3DO (Programmable) • Trip, Alarm, General	• 3DO (Programmable) • Trip, Alarm, General
IDMTL setting	-	-	• Compliance with IEC60255-3 SIT, VIT, EIT, DT	• Compliance with IEC60255-3 SIT, VIT, EIT, DT
Communication	-	• Modbus/RS-485 • Profibus-DP	• Modbus / RS-485 • Profibus-DP	• Modbus / RS-485 • Profibus-DP
Power supply	• Self Power - Power source works over 20% of load current.	• Self Power - Power source works over 20% of load current. - External power source are required for comm. • AC/DC 100~250V • DC 15~60V	• AC/DC 100~250V • DC 15~60V * Basic protection function (L / S / I / G) is still under normal operation without control power.	• AC/DC 100~250V • DC 15~60V * Basic protection function (L / S / I / G) is still under normal operation without control power.
RTC timer	-	• Available	• Available	• Available
LED for trip info.	• Long time delay • Short time delay/Instantaneous • Ground fault	• Long time delay • Short time delay/Instantaneous • Ground fault	• Long time delay • Short time delay/Instantaneous • Ground fault	• Long time delay • Short time delay/Instantaneous • Ground fault
Fault recording	-	• 10 records (Fault/Current/Date and Time)	• 256 records (Fault/Current/Date and Time)	• 256 records • Last fault wave form recording (voltage, current are recorded in 3-phase, and can be read only by communication)
Event recording	-	-	• 256 records(Content, Status, Date)	• 256 records(Content, Status, Date)
Operating button	• Reset button	• Reset, Menu Up/Down, Tap, Enter	• Reset, Menu Up/Down, Tap, Enter	• Reset, Menu Up/Down, Tap, Enter

Each OCR type has Battery in itself.

1. Battery lifespan

1) When turned off: 14~28years

2) When using 1 LED consecutively or turned off: 7~14days

2. The recognizable range of OCR current

1) A-Type: When more 15% than rated current(In)

2) P/S-Type: When more 12% than rated current(In)

* L/S/I/G(or EL)configuration as standard

(Only. Unable to select ground fault and earth leakage, simultaneously)

LS Final Distribution Boards

LS Final Distribution Boards is fully type-tested by ASTA and specially designed for residential and commercial area for the protection of people and equipment.



Full range of Residential & Commercial Distribution System



Features:


- Designed to provide higher level of safety for final distribution board
- Pan assembly type busbar systems to provide easier cabling
- Split neutral bars provide easy connection and maximum cable space
- Easy and safe mounting of LS Miniature Circuit Breaker
- Flush and surface mounted
- Tin plate and cooper busbar
- Galvanized 1.2mm steel sheet



Technical Description

- In compliance with standards : IEC 60439-3
- Short-circuit withstand: 17kA/0.2s
- Peak short time withstand: 35kA
- Index of degree: IP 4X
- Rated operational Voltage(Ue): 415V
- Rated insulation Voltage(Ui): 460V
- Rated Frequency: 50/60Hz
- Rated impuls withstand Voltage(Uimp): 4kV
- Rated Current (In): Upto 125A

Internal view

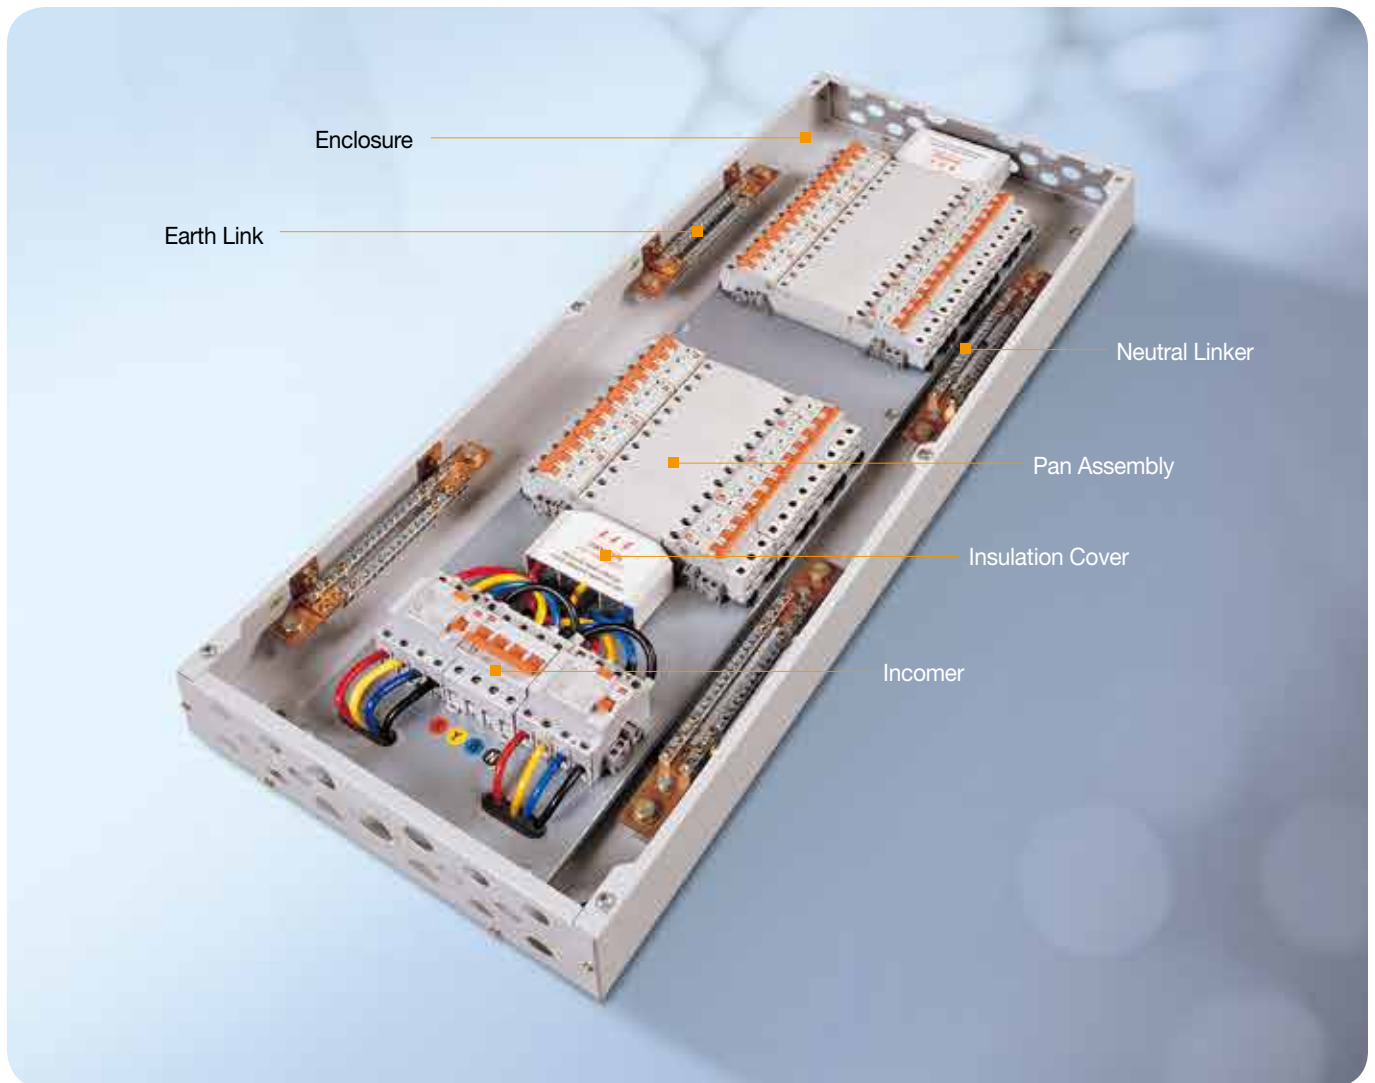

Pan Assembly System




- Rigid and removable pan assembly to provide easier cabling
- Modular panel system
- Flexible connect with CB, RCCB and Disconnect switch

LS Final Distribution Boards

Specific of FDB

Split busbar type

with incoming Isolator feeding two ELCBs

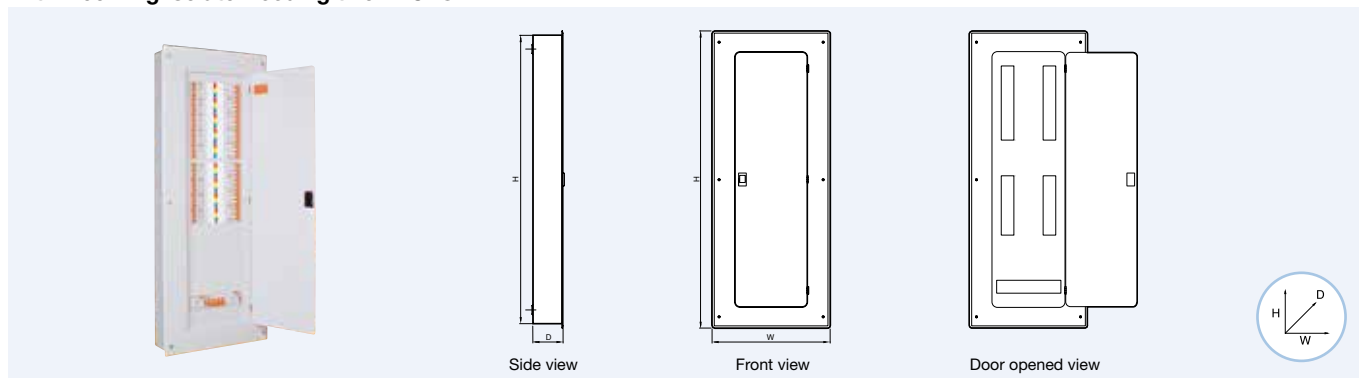


Selection of Enclosure

Code Description	Type	Dimension
02+02 Way Split DB	Flush	530H×430W×110D mm
04+02 Way Split DB		580H×430W×110D mm
04+04 Way Split DB		680H×430W×110D mm
06+04 Way Split DB		780H×430W×110D mm
06+06 Way Split DB		780H×430W×110D mm
08+06 Way Split DB		830H×430W×110D mm
08+08 Way Split DB		980H×430W×110D mm
10+08 Way Split DB		980H×430W×110D mm
12+06 Way Split DB		980H×430W×110D mm
02+02 Way Split DB	Surface	510H×410W×110D mm
04+02 Way Split DB		560H×410W×110D mm
04+04 Way Split DB		660H×410W×110D mm
06+04 Way Split DB		760H×410W×110D mm
06+06 Way Split DB		760H×410W×110D mm
08+06 Way Split DB		810H×410W×110D mm
08+08 Way Split DB		960H×410W×110D mm
10+08 Way Split DB		960H×410W×110D mm
12+06 Way Split DB		960H×410W×110D mm

Single busbar & Single Incomer type

With Incoming 4P ELCB/MCB/Isolator

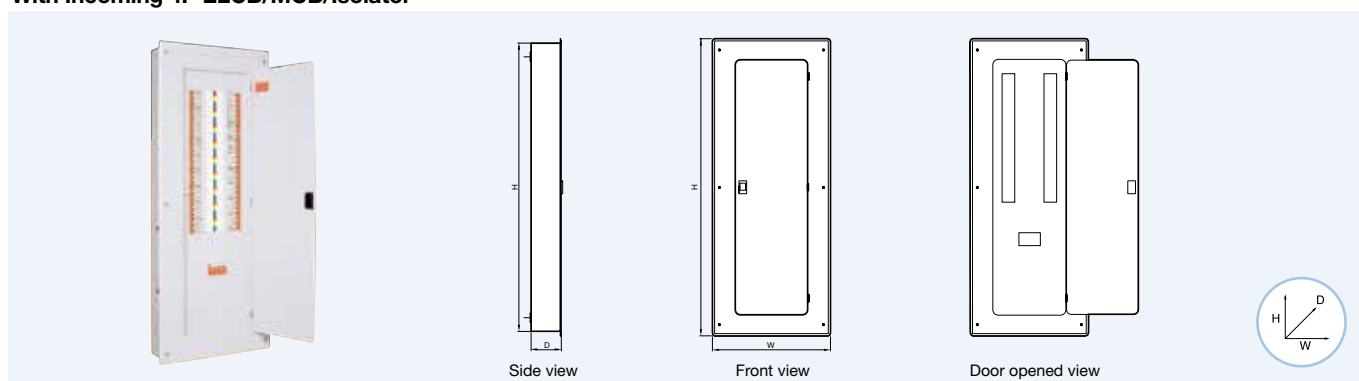

Selection of Enclosure

Code Description	Type	Dimension
4 Way DB 1 INC	Flush	530H×430W×110D mm
6 Way DB 1 INC		580H×430W×110D mm
8 Way DB 1 INC		680H×430W×110D mm
12 Way DB 1 INC		780H×430W×110D mm
14 Way DB 1 INC		830H×430W×110D mm
18 Way DB 1 INC		980H×430W×110D mm
20 Way DB 1 INC		Customized available
24 Way DB 1 INC	Surface	Customized available
4 Way DB 1 INC		510H×410W×110 D mm
6 Way DB 1 INC		560H×410W×110 D mm
8 Way DB 1 INC		660H×410W×110 D mm
12 Way DB 1 INC		760H×410W×110 D mm
14 Way DB 1 INC		810H×410W×110 D mm
18 Way DB 1 INC		960H×410W×110 D mm
20 Way DB 1 INC		Customized available
24 Way DB 1 INC		Customized available


Specific of FDB

Single busbar & Dual Incomer type


With Incoming Isolator & ELCB



Side view



Front view



Door opened view




Selection of Enclosure


Code Description	Type	Dimension
4 Way DB 2 INC	Flush	530H×430W×110D mm
6 Way DB 2 INC		580H×430W×110D mm
8 Way DB 2 INC		680H×430W×110D mm
12 Way DB 2 INC		780H×430W×110D mm
14 Way DB 2 INC		830H×430W×110D mm
18 Way DB 2 INC		980H×430W×110D mm
20 Way DB 2 INC		Customized available
24 Way DB 2 INC		Customized available
4 Way DB 2 INC	Surface	510H×410W×110D mm
6 Way DB 2 INC		560H×410W×110D mm
8 Way DB 2 INC		660H×410W×110D mm
12 Way DB 2 INC		760H×410W×110D mm
14 Way DB 2 INC		810H×410W×110D mm
18 Way DB 2 INC		960H×410W×110D mm
20 Way DB 2 INC		Customized available
24 Way DB 2 INC		Customized available

SP&N Consumer Unit

Incoming 2P ELCB / MCB / Isolator



Side view



Front view



Selection of Enclosure

Code Description	Type	Dimension
6 Way 1P C.Unit		320H×240W×100D mm
9 Way 1P C.Unit		370H×240W×100D mm
12 Way 1P C.Unit		420H×250W×100D mm
15 Way 1P C.Unit		490H×250W×100D mm
18 Way 1P C.Unit		550H×250W×100D mm
22 Way 1P C.Unit		Customized available

- LS SMDB Solutions are arranged for 3 Phase and neutral incoming supply and specially designed easy to install MCCBs.
- These are fitted with Form 3b and 2 busbar assemblies, tested and ASTA Certified.



Rating

- A wide choice of incoming MCCBs make LS SMDB panesboards flexible to suit most of the requirements and represent excellent value and will appeal to consultants, contractors. end users and OEMs. These are offered in ratings of 125A, 250A, 400A, 630A.
- All incoming and outgoing MCCBs have Thermal/Magnetic fixed and adjustable tripping mechanisms incorporated with a trip-to-test button. These are available in ratings as follows : 16, 20, 25, 32, 40, 50, 63, 80, 100, 125, 160, 250, 400, 630A.

Technical Specifications

Constructional Characteristics


- Complied with IEC 60947-1
- Fully Type Tested, ASTA Certified
- Degree of protection : IP41 as per IEC 60529
- Form of separation: Form 3b
- Enclosure constructed from rigid folded zinc phosphate and protected both internally and externally with polyester powder coating

Electrical Characteristics

- Rated Operational Voltage U_e : upto 690V
- Rated Insulation voltage U_i : upto 750V
- Rated Frequency: 50/60Hz
- Rated Impulse withstand voltage U_{imp} : 8kV
- Rated Short time I_{cw} & peak withstand I_{pk} Current: 36kA/1S

Incoming Devices

MCCB Panelboards

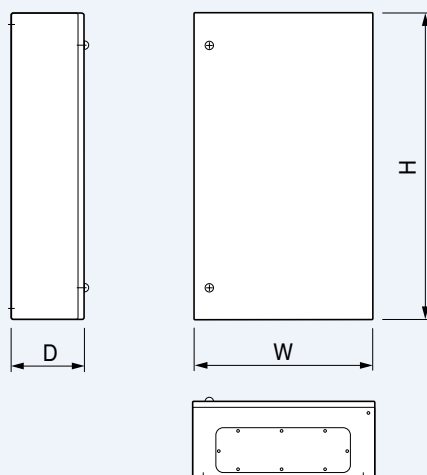

Metasol Series

Incoming Breaker 250 Amps Outgoing Breaker 100 Amps				Incoming Breaker 400 Amps Outgoing Breaker 100 Amps				Incoming Breaker 630 Amps Outgoing Breaker 100 Amps			
No of Ways	Width	Height	Depth	No of Ways	Width	Height	Depth	No of Ways	Width	Height	Depth
2	700	800	180	4	700	1000	250				
4	700	800	180	6	700	1000	250	6	800	1000	250
6	700	800	180	8	700	1200	250	8	800	1200	250
8	700	1000	180	10	700	1400	250	10	800	1400	250
10	700	1200	180	12	700	1400	250	12	800	1400	250
12	700	1200	180	14	700	1600	250	14	800	1600	250

Susol TD/TS Series

Incoming Breaker 250 Amps Outgoing Breaker 100 Amps				Incoming Breaker 400 Amps Outgoing Breaker 100 Amps				Incoming Breaker 630 Amps Outgoing Breaker 100 Amps			
No of Ways	Width	Height	Depth	No of Ways	Width	Height	Depth	No of Ways	Width	Height	Depth
2	700	800	180	4	700	1000	250				
4	700	800	180	6	700	1000	250	6	800	1000	250
6	700	800	180	8	700	1200	250	8	800	1200	250
8	700	1000	180	10	700	1400	250	10	800	1400	250
10	700	1200	180	12	700	1400	250	12	800	1400	250
12	700	1200	180	14	700	1600	250	14	800	1600	250


LS SMDB Solution

Incoming Devices

LSIS “Susol series” range of MCCBs

Rated current, In	250A 630A								
Rated operational voltage, Ue	750V								
MCCB breaker type	TS250			TS400			TS630		
Ultimate breaking capacity, Icu (kA rms) at 415V	N	H	L	N	H	L	N	H	L
	50	85	150	50	85	150	50	85	150
Service breaking capacity, Ics.....% Icu	100% Icu			100% Icu			100% Icu		
Protection trip unit	Thermal magnetic / Electronic								
Switch disconnector type TS	TS250NA			TS400NA			TS630NA		
Short-circuit making capacity Icm (kApeak) (with upstream circuit breaker)	4.9			7.1			8.5		


Incoming application

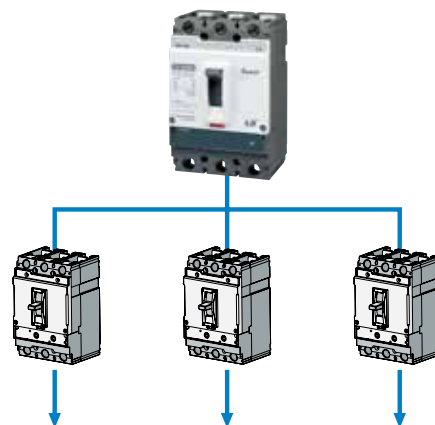

LSIS “Metasol series” range of MCCBs

Rated current, In	250A 630A		
Rated operational voltage, Ue	690V		
Breaker type	ABS203c	ABS403c	ABS803c
Ultimate breaking capacity, Icu (kA rms) at 415V	37	50	65
Service breaking capacity, Ics.....% Icu	100% Icu	100% Icu	100% Icu
Protection trip unit	Thermal magnetic		

Incoming application

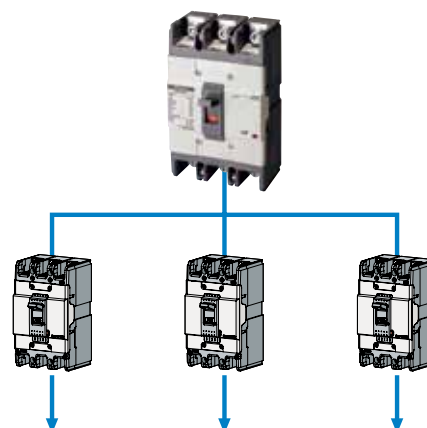


Outgoing devices

LSIS “Susol series” range of MCCBs

Rated current, I_n	16A 250A					
Rated operational voltage, U_e	upto 750V					
Breaker type	TD100, TD160, TS100, TS160, TS250					
	N		H		L	
No. of poles	1P	3P	1P	3P	1P	3P
Ultimate breaking capacity, I_{cu} (kA rms) at 240V	30	100	50	120	-	200
Service breaking capacity, I_{cs}% I_{cu}	100% I_{cu}					
Protection trip unit	Thermal magnetic / Electronic					


Incoming application

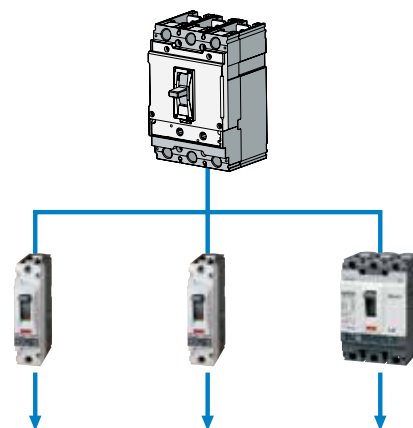

LSIS “Metasol series” range of MCCBs

Rated current, In	15A 100A					
Rated operational voltage, Ue	upto 415V - Single pole upto 690V - Three pole					
Breaker type	ABS103c					
	N		H		L	
No. of poles	2P	3P	2P	3P	2P	3P
Ultimate breaking capacity, Icu (kA rms) at 240V	35		85		100	
Ultimate breaking capacity, Icu (kA rms) at 415V	18		37		50	
Service breaking capacity, Ics.....% Icu	100% Icu					
Protection trip unit	Thermal magnetic					

Incoming application

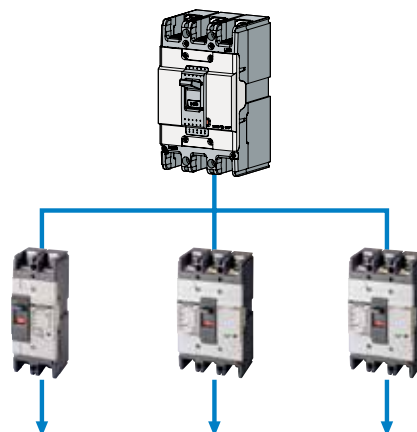

Vacuum Circuit Breakers

Susol VCB Series

VL-06

Type			VL-06□08□04	VL-06□13□06
Rated voltage	Ur (kV)		7.2	
Rated normal current	Ir (A)		400	630
Rated frequency	fr (Hz)		50/60	
Rated short-circuit current	Isc (kA)		8	12.5
Rated short-time withstand current	Ik/tk (kA/s)		8/3	12.5/3
Rated short-circuit breaking capacity	(MVA)		100	160
Rated short-circuit making current	Ip (kA)		2.5×Isc (50Hz)/2.6×Isc (60Hz)	
Rated breaking time	(cycle)		3	
Rated withstand voltage	Power frequency (1 min)	Ud (kV)	20	
	Impulse (1.2×50μs)	Up (kV)	60	
Rated operating sequence			O-0.3s-CO-15s-CO	
Control voltage	Closing coil	(V)	AC/DC 100~130, AC/DC 200~250, DC 125, DC 24~30, DC 48~60, AC 48	
	Trip coil	(V)	AC/DC 100~130, AC/DC 200~250, DC 125, DC 24~30, DC 48~60, AC 48	
Auxiliary contacts			2a2b, 4a4b, 6a6b	
Rated opening time		(sec)	≤ 0.04	
No-load closing time		(sec)	≤ 0.06	
Type test class	Mechanical		M2	
	Electrical		E2 (List1)	
	Capacitive current switching		C2	
Installation version	Fixed		P type	
	Drawout		E, F, G type (for MESG)	
Phase distance		(mm)	130	
Weight	Breaker (E, F, G type)	(kg)	37	37
	Cradle (E, F, G type)	(kg)	18, 25, 32	19, 26, 33
Standards			IEC 62271-100, KS C 4611, JEC 2300/JIS C 4603, V-check (KESCO)	

VL-06/12/17

Type			VL-06□20/25□06/13/20			VL-12□20/25□06/13/20			VL-17□20/25□06/13/20		
Rated voltage		Ur (kV)	7.2			12			17.5		
Rated normal current		Ir (A)	630	1250	2000	630	1250	2000	630	1250	2000
Rated frequency		fr (Hz)	50/60								
Rated short-circuit current		Isc (kA)	20, 25								
Rated short-time withstand current		Ik/tk (kA/s)	20/3, 25/3								
Rated short-circuit breaking capacity		(MVA)	250/310			410/520			600/750		
Rated short-circuit making current		Ip (kA)	2.5×Isc (50Hz)/2.6×Isc (60Hz)								
Rated breaking time		(cycle)	3								
Rated withstand voltage	Power frequency (1 min)	Ud (kV)	20			28 (42)			38		
	Impulse (1.2×50μs)	Up (kV)	60			75 (82)			95		
Rated operating sequence			O-0.3s-CO-15s-CO								
Control voltage	Closing coil	(V)	DC 24~30, DC 48~60, DC 110, DC 125, DC 220~250, AC 48, AC 100~130, AC 220~250								
	Trip coil	(V)	DC 24~30, DC 48~60, DC 110, DC 125, DC 220~250, AC 48, AC 100~130, AC 220~250								
Auxiliary contacts			4a4b, 10a10b								
Rated opening time		(sec)	≤ 0.04								
No-load closing time		(sec)	≤ 0.06								
Type test class	Mechanical		M2								
	Electrical		E2 (List3)								
	Capacitive current switching		C2								
Installation version *	Fixed		P type			P type					
	Drawout		E, F, G type (for MESG), H type (for MCSG)			E, F type (for MESG), H type (for MCSG)					
Phase distance **		(mm)	150			150 (210)			150 (210)		
Weight	Breaker (E, F, G, K type)	(kg)	100	100	130	115 (120)	115 (120)	130 (140)	115 (120)	115 (120)	130 (140)
	Cradle (E, F, G, K type)	(kg)	170	170	180	170 (200)	170 (200)	180 (200)	170 (200)	170 (200)	180 (200)
Standards			IEC 62271-100, KERI/KEMA, V-check (KESCO)								

* H type is a box type cradle with CB compartment style structure.

** () displays option of phase distance.

VL-06/12/17

Type			VL-06□32□06/13/20			VL-12□32□06/13/20/25				VL-17□32□06/13/20/25			
Rated voltage		Ur (kV)	7.2			12				17.5			
Rated normal current		Ir (A)	630	1250	2000	630	1250	2000	2500	630	1250	2000	2500
Rated frequency		fr (Hz)	50/60										
Rated short-circuit current		Isc (kA)	31.5										
Rated short-time withstand current		Ik/tk (kA/s)	31.5/3(4 ^{Note 1)})										
Rated short-circuit breaking capacity		(MVA)	393			655				955			
Rated short-circuit making current		Ip (kA)	2.5 × Isc (50Hz)/2.6 × Isc (60Hz)										
Rated breaking time		(cycle)	3										
Rated withstand voltage	Power frequency (1 min)	Ud (kV)	20			28 (42) ^{Note 2)}				38			
	Impulse(1.2 × 50μs)	Up (kV)	60			75				95			
Rated operating sequence			O-0.3s-CO-3min-CO										
Control voltage	Closing coil	(V)	DC 24~30, DC 48~60, DC 110, DC 125, DC 220~250, AC 48, AC 100~130, AC 220~250										
	Trip coil	(V)	DC 24~30, DC 48~60, DC 110, DC 125, DC 220~250, AC 48, AC 100~130, AC 220~250										
Auxiliary contacts			4a4b, 10a10b										
Rated opening time		(sec)	≤ 0.04										
No-load closing time		(sec)	≤ 0.06										
Type test class	Mechanical		M2										
	Electrical		E2 (List 3)										
	Capacitive current switching		C2										
Installation version *	Fixed		Tip P										
	Drawout		H type (for MCSG)	E, F, Fs, G, Gs, K type (for MESG) H type (for. MCSG)		H type (for MCSG)	Gs, K type (for MESG) H type (for MCSG)	H type (for MCSG)		H type (for MCSG)			
Phase distance **		(mm)	150			150 (210)			210 (275)	150 (210)			210 (275)
Weight	Breaker (H type)	(kg)	100	100	130	115/120	115/120	130/140	160/175	115/120	115/120	130/140	160/175
	Cradle (H type)	(kg)	170	170	200	170/200	170/200	170/200	260/290	170/200	170/200	170/200	260/290
	Breaker (P, E, F, G, K type)	(kg)	85	85	100	85/100	85/100	100/115	120/135	85/100	85/100	100/115	120/135
Standards			IEC 62271-100, KERI, V-check (KESCO)										

* H type is a box type cradle with CB compartment style structure. ** () displays option of phase distance.

Nota 1) For low 4s, please contact us.

2) Contact us.

VL-20/25

Type			VL-20,25□13□06/13		VL-20,25□16□06/13		VL-20,25□25□06/13/20/25			
Rated voltage		Ur (kV)	24/25.8							
Rated normal current		Ir (A)	630	1250	630	1250	630	1250	2000	2500
Rated frequency		fr (Hz)	50/60 ^{Note 1)}							
Rated short-circuit current		Isc (kA)	12.5		16		25			
Rated short-time withstand current		Ik/tk (kA/s)	12.5/3 ^{Note 2)}		16/3 ^{Note 2)}		25/3 ^{Note 2)}			
Rated short-circuit breaking capacity		(MVA)	520/560		665/715		1040/1120			
Rated short-circuit making current		Ip (kA)	2.5×Isc (50Hz)/2.6×Isc (60Hz)							
Rated breaking time		(cycle)	3							
Rated withstand voltage	Power frequency (1 min)	Ud (kV)	50/60							
	Impulse(1.2×50μs)	Up (kV)	125							
Rated operating sequence			O-0.3s-CO-3min-CO							
Control voltage	Closing coil	(V)	DC 24~30, DC 48~60, DC 110, DC 125, DC 220~250, AC 48, AC 100~130, AC 220~250							
	Trip coil	(V)	DC 24~30, DC 48~60, DC 110, DC 125, DC 220~250, AC 48, AC 100~130, AC 220~250							
Auxiliary contacts			4a4b, 10a10b							
Rated opening time		(sec)	≤ 0.04							
No-load closing time		(sec)	≤ 0.06							
Type test class	Mechanical		M2							
	Electrical		E2 (List 3)							
	Capacitive current switching		C2							
Installation version *	Fixed		P type							
	Drawout		E, F, G type (for MESG), K, H type (for MCSG)							H type (for MCSG)
Phase distance **		(mm)	210/265/275							275
Weight	Breaker (H type)	(kg)	120 (130)		130 (140)		150 (160)			
	Cradle (H type)	(kg)	200 (220)		200 (220)		200 (220)			
	Breaker (P, E, F, G, K, H type)	(kg)	110	115	120		135	-		
Standards			IEC 62271-100, KERI, V-check (KESCO)							

* H type is a box type cradle with CB compartment style structure. ** () displays option of phase distance.

Nota 1) 24/25.8kV 25kA 2000A(Phase distance 210mm): 60Hz available only 2) For low 4s, please contact us.

Vacuum Circuit Breakers

Susol VCB Series

VL-36

Type			VH-36□25□06	VH-36□25□13	VH-36□25□20	VH-36□25□25
Rated voltage	Ur (kV)		36			
Rated normal current	Ir (A)		630	1250	2000	2500
Rated frequency	fr (Hz)		50/60			
Rated short-circuit current	Isc (kA)		60			
Rated short-time withstand current	Ik/tk (kA/s)		25/3(4 ^{Note 1)})			
Rated short-circuit breaking capacity	(MVA)		1560			
Rated short-circuit making current	Ip (kA)		62.5/65			
Rated short-circuit making current	(Cycle)		3			
Rated withstand voltage	Power frequency (1 min)	Ud (kV)	70			
	Impulse (1.2 × 50μs)	Up (kV)	170			
Rated operating sequence			O-0.3s-CO-15s-CO			
Control voltage	Closing coil	(V)	DC 24~30, DC 48~60, DC 110, DC 125, DC 220, AC 48, AC 100~130, AC 220~250			
	Trip coil	(V)	DC 24~30, DC 48~60, DC 110, DC 125, DC 220, AC 48, AC 100~130, AC 220~250			
Auxiliary contacts			4a4b, 10a10b			
Rated opening time		(sec)	≤ 0.04			
No-load closing time		(sec)	≤ 0.07			
Type test class	Mechanical		M2			
	Electrical		E2 (List3)			
	Capacitive current switching		C2			
Installation version	Fixed		P type			
	Drawout		H type (for MCSG)			
Phase distance		(mm)	275			
Weight	Breaker (H type)	(kg)	260	260	280	300
	Cradle (H, type)	(kg)	440	440	450	460
Standards			IEC 62271-100			

Note 1) Pour Icw 4s, contactez-nous

LVB-06/12

Type			VH-06□32□32	VH-06□40□12, 20, 32			VH-12□32□32	VH-12□40□12, 20, 32		
Rated voltage		Ur (kV)	7.2	7.2			12	12		
Rated normal current		Ir (A)	3150 *	1250	2000	3150 *	3150 *	1250	2000	3150 *
Rated frequency		fr (Hz)	50/60							
Rated short-circuit current		Isc (kA)	31.5	40			31.5	40		
Rated short-time withstand current		Ik/tk (kA/s)	31.5/3	40/3			31.5/3	40/3		
Rated short-circuit breaking capacity		(MVA)	393	499			655	831		
Rated short-circuit making current		Ip (kA)	2.5×Isc (50Hz)/2.6×Isc (60Hz)							
Rated short-circuit making current		(Cycle)	3							
Rated withstand voltage	Power frequency (1 min)	Ud (kV)	20				28			
	Impulse (1.2×50μs)	Up (kV)	60				75			
Rated operating sequence			O-0.3s-CO-3min-CO							
Control voltage	Closing coil	(V)	DC 48, DC 110, DC 125, DC 220~250, AC 48, AC 110, AC 220							
	Trip coil	(V)	DC 48, DC 110, DC 125, DC 220~250, AC 48, AC 110, AC 220							
Auxiliary contacts			4a4b, 10a10b							
Rated opening time		(sec)	≤ 0.04							
No-load closing time		(sec)	≤ 0.06							
Type test class	Mechanical		M2							
	Electrical		E2 (List1)							
	Capacitive current switching		C2							
Installation version *	Fixed		P type				-			
	Drawout		E,F,G type (for MESG), MCSG Cradle				MCSG Cradle			
Phase distance		(mm)	210	150	210	210	150	210		
Weight	Breaker (MESG, MCSG type)	(kg)	210, 220	135, 160	135, 160	210, 220	220	164	165	220
	Cradle (MESG, MCSG type)	(kg)	135, 155	55, 110	63, 117	135, 155	155	110	117	155
Standards			IEC 62271-100, KERI/KEMA, V-check/KESCO)							

* MCSG style drawout type provide a cradle for building in the switchgear, not a box type for CB compartment. Ordering type is LVB.

Note 1) H type that is a box type cradle for enabling a CB compartment in MCSG is under development. Consult us for ordering.

2) Some LVB is the ordering name of the switchboard for export

VH-06/12/17

Type			VH-06/12□40□13/20				VH-06/12/17□40□13/20					
Rated voltage		Ur (kV)	7.2		12		7.2		12		17.5	
Rated normal current		Ir (A)	1250	2000	1250	2000	1250	2000	1250	2000	1250	2000
Rated frequency		fr (Hz)	50/60									
Rated short-circuit current		Isc (kA)	40									
Rated short-time withstand current		Ik/tk (kA/s)	40/4									
Rated short-circuit breaking capacity		(MVA)	499		831		499		831		1212	
Rated short-circuit making current		Ip (kA)	2.5×Isc (50Hz)/2.6×Isc (60Hz)									
Rated short-circuit making current		(Cycle)	3									
Rated withstand voltage	Power frequency (1 min)	Ud (kV)	20		28 (42)		20		28 (42)		38	
	Impulse (1.2×50μs)	Up (kV)	60		75		60		75		95	
Rated operating sequence			O-0.3s-CO-3min-CO				O-0.3s-CO-15s-CO					
Control voltage	Closing coil	(V)	DC 48, DC 110, DC 125, DC 220~250, AC 48, AC 110, AC 220									
	Trip coil	(V)	DC 48, DC 110, DC 125, DC 220~250, AC 48, AC 110, AC 220									
Auxiliary contacts			4a4b, 10a10b									
Rated opening time		(sec)	≤ 0.04									
No-load closing time		(sec)	≤ 0.06									
Type test class	Mechanical		M2									
	Electrical		E2 (List3)									
	Capacitive current switching		C2									
Installation version	Drawout		Fs, Gs, K, H type				K, H type					
Phase distance		(mm)	150				210					
Weight	Breaker (H type)	(kg)	165				215					
	Cradle (H, type)	(kg)	205				226					
Standards			IEC 62271-100									

VH-06/12/17

Type			VH-06/12/17□32/40□32						
Rated voltage		Ur (kV)	7.2		12		17.5		
Rated normal current		Ir (A)	3150						
Rated frequency		fr (Hz)	50/60						
Rated short-circuit current		Isc (kA)	31.5/40						
Rated short-time withstand current		Ik/tk (kA/s)	40/4						
Rated short-circuit breaking capacity		(MVA)	393/499		655/831		955/1212		
Rated short-circuit making current		Ip (kA)	2.5×Isc (50Hz)/2.6×Isc (60Hz)						
Rated short-circuit making current		(Cycle)	3						
Rated withstand voltage	Power frequency (1 min)	Ud (kV)	20		28 (42)		38		
	Impulse (1.2×50μs)	Up (kV)	60		75		95		
Rated operating sequence			O-0.3s-CO-15s-CO						
Control voltage	Closing coil	(V)	DC 48, DC 110, DC 125, DC 220~250, AC 48, AC 110, AC 220						
	Trip coil	(V)	DC 48, DC 110, DC 125, DC 220~250, AC 48, AC 110, AC 220						
Auxiliary contacts			4a4b, 10a10b						
Rated opening time		(sec)	≤0.04						
No-load closing time		(sec)	≤0.06						
Type test class	Mechanical		M2						
	Electrical		E2 (List3)						
	Capacitive current switching		C2						
Installation version	Drawout		Fs, Gs, K, H type		Gs, K, H type		K, H type	K type	H type
Phase distance		(mm)	210		210		210	254	275
Weight	Breaker (H type)	(kg)	240		240		240	280	280
	Cradle (H, type)	(kg)	235		235		235	250	250
Standards			IEC 62271-100						

Vacuum Circuit Breakers

Susol VCB Series

VH-06/12/17

Type			VH-06□50□13/20/25/32				VH-12□50□13/20/25/32				VH-17□50□13/20/25/32			
Rated voltage		Ur (kV)	7.2				12				17.5			
Rated normal current		Ir (A)	1250	2000	2500	3150	1250	2000	2500	3150	1250	2000	2500	3150
Rated frequency		fr (Hz)	60											
Rated short-circuit current		Isc (kA)	50											
Rated short-time withstand current		Ik/tk (kA/s)	50/3											
Rated short-circuit breaking capacity		(MVA)	623				1039				1515			
Rated short-circuit making current		Ip (kA)	2.6×Isc (60Hz)											
Rated breaking time		(cycle)	3											
Rated withstand	Power frequency (1 min)	Ud (kV)	20				28 (42) Note)				38			
voltage	Impulse (1.2 × 50μs)	Up (kV)	60				75 (82) Note)				95			
Rated operating sequence			O-0.3s-CO-3min-CO											
Control voltage	Closing coil	(V)	DC 48, DC 110, DC 125, DC 220~250, AC 48, AC 110, AC 220											
	Trip coil	(V)	DC 48, DC 110, DC 125, DC 220~250, AC 48, AC 110, AC 220											
Auxiliary contacts			4a4b, 10a10b											
Rated opening time		(sec)	≤ 0.04											
No-load closing time		(sec)	≤ 0.06											
Type test class	Mechanical		M2											
	Electrical		E2 (List3)											
	Capacitive current switching		C2											
Installation version	Fixed		P type											
	Drawout		H type (for MCSG)											
Phase distance		(mm)	210	275			210	275			210	275		
Weight	Breaker (H type)	(kg)	230	287	290		230	287	290		230	287	290	
	Cradle (H, type)	(kg)	175	320	320		175	320	320		175	320	320	
Standards			IEC 62271-100, KERI/KEMA, V-check(KESCO)											

* H type is a box type cradle with CB compartment style structure.

Note) Contact us.

VH-06/12/17

Type			VH-06/12/17□40□40			VH-06/12/17□50□40		
Rated voltage		Ur (kV)	7.2	12	17.5	7.2	12	17.5
Rated normal current		Ir (A)	4000					
Rated frequency		fr (Hz)	50/60					
Rated short-circuit current		Isc (kA)	40			50		
Rated short-time withstand current		Ik/tk (kA/s)	40/4			50/4		
Rated short-circuit breaking capacity		(MVA)	499	831	1212	624	1040	1515
Rated short-circuit making current		Ip (kA)	104			130		
Rated short-circuit making current		(Cycle)	3					
Rated withstand voltage	Power frequency (1 min)	Ud (kV)	20	28 (42)	38	20	28 (42)	38
	Impulse (1.2 × 50μs)	Up (kV)	60	75	95	60	75	95
Rated operating sequence			O-0.3s-CO-15s-CO					
Control voltage	Closing coil	(V)	DC 48, DC 110, DC 125, DC 220~250, AC 48, AC 110, AC 220					
	Trip coil	(V)	DC 48, DC 110, DC 125, DC 220~250, AC 48, AC 110, AC 220					
Auxiliary contacts			4a4b, 10a10b					
Rated opening time		(sec)	≤ 0.04					
No-load closing time		(sec)	≤ 0.06					
Type test class	Mechanical		M2					
	Electrical		E2 (List3)					
	Capacitive current switching		C2					
Installation version	Fixed		-	-	P type	-	-	P type
	Drawout		H type	H type	H type	H type	H type	H type
Phase distance		(mm)	275					
Weight	Breaker (H type)	(kg)	395					
	Cradle (H, type)	(kg)	200					
Standarde aplicate			IEC 62271-100					

VH-06/12

Type			VH-06H40,50L50	VH-12H40,50L50
Rated voltage	Ur (kV)		7.2	12
Rated normal current	Ir (A)		5000	5000
Rated frequency	fr (Hz)		50/60	
Rated short-circuit current	Isc (kA)		40/50	
Rated short-time withstand current	Ik/tk (kA/s)		50/4	
Rated short-circuit breaking capacity	(MVA)		624	1040
Rated short-circuit making current	Ip (kA)		2.5 × Isc (50Hz)/2.6 × Isc (60Hz)	
Rated breaking time	(Cycle)		3	
Rated withstand voltage	Power frequency (1 min)	Ud (kV)	20	20
	Impulse (1.2 × 50μs)	Up (kV)	60	75
Rated operating sequence			O-0.3s-CO-3min-CO	
Control voltage	Closing coil	(V)	DC 48, DC 110, DC 125, DC 220~250, AC 48, AC 110, AC 220	
	Trip coil	(V)	DC 48, DC 110, DC 125, DC 220~250, AC 48, AC 110, AC 220	
Auxiliary contacts			4a4b, 10a10b	
Rated opening time		(sec)	≤ 0.04	
No-load closing time		(sec)	≤ 0.06	
Type test class	Mechanical		M2	
	Electrical		E2 (List3)	
	Capacitive current switching		C2	
Installation version	Fixed		P type	
	Drawout		H type (for MCSG)	
Phase distance		(mm)	320	
Weight	Breaker (H type)	(kg)	430	
	Cradle (K type)	(kg)	200	
Standards			IEC 62271-100	

VH-20/25

Type			VH-20,25□25□25	VH-20,25□32□13/20/32			VH-20,25□40□13/20/32			
Rated voltage		Ur (kV)	24/25.8							
Rated normal current		Ir (A)	2500	1250	2000	3150	1250	2000	3150	
Rated frequency ***		fr (Hz)	50/60	60			50/60			
Rated short-circuit current		Isc (kA)	25	31.5			40			
Rated short-time withstand current		Ik/tk (kA/s)	25/3	31.5/3			40/3			
Rated short-circuit breaking capacity		(MVA)	1039/1117	1309/1407			1662/1787			
Rated short-circuit making current		Ip (kA)	2.6 ×Isc (60Hz)							
Rated breaking time		(cycle)	3							
Rated withstand voltage	Power frequency (1 min)	Ud (kV)	50 (65) Note							
	Impulse (1.2 × 50μs)	Up (kV)	125							
Rated operating sequence ****			O-0.3s-CO-3min-CO							
Control voltage	Closing coil	(V)	DC 48, DC 110, DC 125, DC 220~250, AC 48, AC 110, AC 220							
	Trip coil	(V)	DC 48, DC 110, DC 125, DC 220~250, AC 48, AC 110, AC 220							
Auxiliary contacts			4a4b, 10a10b							
Rated opening time		(sec)	≤ 0.04							
No-load closing time		(sec)	≤ 0.06							
Type test class	Mechanical		M2							
	Electrical		E2 (List3)							
	Capacitive current switching		C2							
Installation version *	Fixed		P type							
	Drawout		H type (for MCSG)							
Phase distance **		(mm)	275	210 (275)	210 (275)	275	210 (275)	210 (275)	275	
Weight	Breaker (H type)	(kg)	295	256 (273)	256 (273)	318	256 (273)	256 (273)	318	
	Cradle (H type)	(kg)	316	257 (284)	257 (284)	316	257 (284)	257 (284)	316	
Standards			IEC 62271-100, KERI/KEMA, V-check (KESCO)							

* H type is a box type cradle with CB compartment style structure. ** () displays option of phase distance. *** Rated frequency(fr) 50Hz is certified only to 24kV.

**** Rated operating sequence O-0.3s-CO-15s-CO is certified only to 24kV 40kA.

Note) Contact us.

Vacuum Circuit Breakers

Susol VCB Series

VH-36


Type			VH-36□25□13/20/32			VH-36□32□13/20/32			VH-36□40□13/20/32		
Rated voltage		Ur (kV)	36								
Rated normal current		Ir (A)	1250	2000	3150	1250	2000	3150	1250	2000	3150
Rated frequency		fr (Hz)	50/60								
Rated short-circuit current		Isc (kA)	25			31.5			40		
Rated short-time withstand current		Ik/tk (kA/s)	25/3			31.5/3			40/3		
Rated short-circuit breaking capacity		(MVA)	1559			1964			2494		
Rated short-circuit making current		Ip (kA)	2.5 × Isc (50Hz)/2.6 × Isc (60Hz)								
Rated breaking time		(cycle)	3								
Rated withstand voltage	Power frequency (1 min)	Ud (kV)	70 (95) Note)								
	Impulse (1.2 × 50μs)	Up (kV)	170								
Rated operating sequence			O-0.3s-CO-3min-CO								
Control voltage	Closing coil	(V)	DC 48, DC 110, DC 125, DC 220~250, AC 48, AC 110, AC 220								
	Trip coil	(V)	DC 48, DC 110, DC 125, DC 220~250, AC 48, AC 110, AC 220								
Auxiliary contacts			4a4b, 10a10b								
Rated opening time		(sec)	≤ 0.04								
No-load closing time		(sec)	≤ 0.06								
Type test class	Mechanical		M2								
	Electrical		E2 (List3)								
	Capacitive current switching		C2								
Installation version *	Fixed		P type								
	Drawout		H type (for MCSG)								
Phase distance		(mm)	300								
Weight	Breaker (H type)	(kg)	400	490		400	490		400	490	
	Cradle (H type)	(kg)	700	750		700	750		700	750	
Standards			IEC 62271-100, KERI/KEMA, V-check (KESCO)								

* H type is a box type cradle with CB compartment style structure.
 Note) Contact us.

Accessories

Dimensions	Main	Cradle
	• Secondary trip coil • Under voltage trip release • Current trip coil • Position S/W • Keylock • Button padlock • Button cover • Mechanical position indicator	• Mechanical position indicator
	• Secondary trip coil • Under voltage trip release • Current trip coil • Position S/W • Keylock • Button padlock • Button cover • Plug interlock • Mechanical position indicator	• Earthing S/W • Earthing with electromechanical interlock • Earthing S/W with position S/W • Earthing S/W with keylock • Door interlock • MOC • TOC • Shutter padlock • Emergency mechanical trip device
	• Secondary trip coil • Under voltage trip release • Current trip coil • Position S/W • Keylock • Button padlock • Button cover • Plug interlock • Mechanical position indicator	• Earthing S/W • Earthing with electromechanical interlock • Earthing S/W with position S/W • Earthing S/W with keylock • Door interlock • MOC • TOC • Shutter padlock • Emergency mechanical trip device

Various type of Cradle




E type

- No Shutter
- For MESG



F type

- Insulation Shutter
- For MESG



G type

- Bushing
- Insulation Shutter
- For MESG



K type

- Bushing
- Closed Compartment structure
- For MCSG



H type

- Bushing
- Metal Insulation Shutter
- Closed Compartment structure
- Earthing Switch & Interlock
- For MCSG
- Door Interlock

Global Network

LSIS is engaged in business all over the world.

LSIS global network includes 7 overseas corporations, 12 overseas branches, and 224 clients in 77 countries.



► R&D



R&D campus

Focuses on gaining competitive advantages through development of next generation platforms



Power device R&D center

Leading technology in electric industry and continuously developing future-growth dynamic engines



Automation R&D Center

Serves as the main research institute for LSIS



PT&T (Testing laboratory)


Internationally-renowned testing center that has formed partnerships with the UL, CE, KEMA and CESI

► Factory



Cheongju factory (Korea)

Electric products, mold TR, MV/LV switchgear, HV GIS

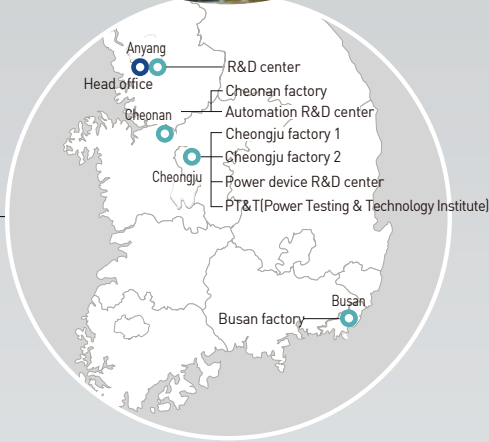

Cheonan factory (Korea)

PLC, AC drive, HMI, DCS, PV module



Busan factory (Korea)

HV TR, HVDC, FACTS



Wuxi factory (China)

Electric products



Dalian factory (China)

MV/LV switchgear,
MV contactor



Hanoi factory (Vietnam)

MV/LV switchgear,
Mold TR



Safety Instructions

- For your safety, please read user's manual thoroughly before operating.
- Contact the nearest authorized service facility for examination, repair, or adjustment.
- Please contact qualified service technician when you need maintenance.
Do not disassemble or repair by yourself!
- Any maintenance and inspection shall be performed by the personnel having expertise concerned.



- According to The WEEE Directive, please do not discard the device with your household waste.



www.lsis.com

■ Head Quarter

127 LS-ro (Hogye-dong) Dongan-gu, Anyang-si,
Gyeonggi-Do, 14119, Korea
Tel. 82-2-2034-4848, 4671, 4429 Fax: 82-2-2034-4555

■ Overseas Subsidiaries

- **LSIS(Dalian) Co., Ltd.** (Dalian, China)
Tel: 86-411-8730-7510 Fax: 86-411-8730-7560 E-Mail: jiheo@lsis.com
- **LSIS(Wuxi) Co., Ltd.** (Wuxi, China)
Tel: 86-510-8534-6666-8005 Fax: 86-510-8534-4078 E-Mail: sunhwank@lsis.com
- **LS VINA Industrial Systems Co., Ltd** (Hanoi, Vietnam)
Tel: 84-24-3882-0222 Fax: 84-24-3882-0220 E-Mail: jhchoi4@lsis.com
- **LSIS Middle East FZE** (Dubai, U.A.E.)
Tel: 971-4-886-5360 Fax: 971-4-886-5361 E-Mail: hschoib@lsis.com
- **LSIS Europe B.V.** (Hoofddorp, Netherlands)
Tel: 31-20-654-1424 Fax: 31-20-654-1429 E-Mail: europartner@lsis.com
- **LSIS Japan Co., Ltd.** (Tokyo, Japan)
Tel: 81-3-6268-8241 Fax: 81-3-6268-8240 E-Mail: jschuna@lsis.com
- **LSIS USA Inc.** (Chicago, U.S.A)
Tel: 1-800-891-2941 Fax: 1-847-383-6543 E-Mail: sales.us@lsis.com



Technical Question or After-sales Service

Customer Center-Quick Responsive
Service, Excellent technical support

82-1644-5481

■ Overseas Branches

- **LSIS Shanghai Office** (China)
Tel: 86-21-5237-9977 Fax: 86-21-5237-7189 E-Mail: tsjun@lsis.com
- **LSIS Beijing Office** (China)
Tel: 86-10-5761-3127 Fax: 86-10-5761-3128 E-Mail: chendm@lsis.com.cn
- **LSIS Guangzhou Office** (China)
Tel: 86-20-8326-6784 Fax: 86-20-8326-6287 E-Mail: chenxs@lsis.com.cn
- **LSIS Qingdao Office** (China)
Tel: 86-532-8501-6058 Fax: 86-532-8501-6057 E-Mail: wangzy@lsis.com.cn
- **LSIS Chengdu Office** (China)
Tel: 86-28-8670-3200 Fax: 86-28-8670-3203 E-Mail: yangcf@lsis.com.cn
- **LSIS ShenYang Office** (China)
Tel: 86-24-2321-9050 Fax: 86-24-8386-7210 E-Mail: lixf@lsis.com.cn
- **LSIS Tokyo Office** (Japan)
Tel: 81-3-6268-8241 Fax: 81-3-6268-8240 E-Mail: jschuna@lsis.com
- **LSIS Hochiminh Office** (Vietnam)
Tel: 84-28-3823-7890 E-Mail: sjbaik@lsis.com
- **LSIS Moscow Office** (Russia)
Tel: 7-499-682-6130 E-Mail: jdpark1@lsis.com
- **LSIS Jakarta Office** (Indonesia)
Tel: 62-21-2933-7614 E-Mail: diroh@lsis.com
- **LSIS Bangkok Office** (Thailand)
Tel: 66-90-950-9683 E-Mail: sjleet@lsis.com