
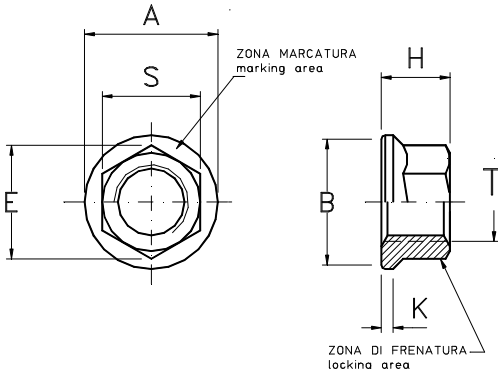
 PAOLO ASTORI s.r.l. via Mirabella 9-MAGGIATE SUP. I 28013-GATTICO (NO)			DS10 DS11					
 dimensions in mm.								
dimensions code	thread T	A max.	B min.	E min.	H max.	K ref	S h13	mass kg x 1000
03	3x0,5 4H-6H	6,0	4,9	4,4	3,0	0,5	4	0,28
04	4x0,7 4H-6H	8,0	6,5	5,5	4,0	0,6	5	0,50
05	5x0,8 4H-6H	9,2	8,0	6,7	5,0	0,6	6	0,80
06	6x1 4H-5H	10,5	9,4	7,8	5,4	0,9	7	1,15
07	7x1 4H-5H	12,6	11,3	8,9	6,2	1,0	8	1,7
08F	8x1 4H-5H	13,6	12,3	11,1	7,2	1,1	10	3,1
08	8x1,25 4H-5H	13,6	12,3	11,1	7,2	1,1	10	3,1
09F	9x1 4H-5H	16,6	15,2	13,3	8,5	1,3	12	5,0
09	9x1,25 4H-5H	16,6	15,2	13,3	8,5	1,3	12	5,0
10x1	10x1 4H-5H	16,6	15,2	13,3	8,5	1,3	12	4,5
10F	10x1,25 4H-5H	16,6	15,2	13,3	9,0	1,3	12	4,5
10	10x1,5 4H-5H	16,6	15,2	13,3	9,0	1,3	12	4,5
11x1	11x1 4H-5H	19,8	18,2	15,5	10,8	2,0	14	10,5
12x1	12X1 4H-5H	19,8	18,2	15,5	10,8	2,0	14	10,2
12F	12 x 1,25 4H-5H	19,8	18,2	15,5	10,8	2,0	14	10,2
12	12x1,5 4H-5H	19,8	18,2	15,5	10,8	2,0	14	10,2
12x1,75	12x1,75 4H-5H	19,8	18,2	15,5	10,8	2,0	14	10,2
14x1	14x1 4H-5H	23,0	21,8	17,8	12,0	2,0	16	11,8
14F	14x1,25 4H-5H	23,0	21,8	17,8	12,0	2,0	16	11,8
14	14x1,5 4H-5H	23,0	21,8	17,8	12,0	2,0	16	11,8
14x2	14x2 4H-5H	23,0	21,8	17,8	12,0	2,0	16	11,8
16	16X1,5 4H-5H	26,0	25,3	21,1	13,5	2,2	19,0	T.B.A-
18	18X1,5 4H-5H	29,0	28,3	24,5	15,0	2,2	22,0	
MATERIAL CODE	MATERIAL	FINISH		HARDNESS HR _C		CLASS	TEMPERATURE	
DS10L	W1.7220, AISI8740, 35CrMo4	Cadmium plate +MoS ₂		44 max.		1100 MPa	235°C	
DS10C		Cadmium plate						
DS11X	Passivation		28 min.		650°C			
DS11L	Passivation +MoS ₂ + green dot				425°C			
DS11A	Silver plate				650°C			

THREAD: thread profile according to ISO68
(unless MJ is required – see NOTE)

MARKING : α symbol
PROCUREMENT SPEC : LN65016

CALL OUT: material code-dimension (e.g. DS10L-04)

NOTE:
for left thread add S at dimension code (e.g. DS10L-04S)
for MJ thread profile according to ISO 5855 add J in front of material code (e.g. JDS10L-04).

NUT, REDUCED HEX, SELF-LOCKING	DS10 DS11
Rev 3 dated 20 Jan 2012.	