

URS

E180276

Rated Voltage
690V_{AC}/600V_{AC}
700V_{AC}

Rated Breaking Test
Capacity Voltage
200kA IEC - 1.1Un
UL - 1.0Un

Class
aR

Standard(s)
UL 248-13
IEC 60269-4
VDE 0636- Part 40



Size SQB3 - North American

Rated Current I _n [A]	US-Blade Short With fitting for microswitch		US-Long Long With fitting for microswitch		US-Threaded 1/2" UNC With fitting for microswitch	
	Article Number	UL rec	Article Number	UL rec	Article Number	UL rec
500	2063632.500	✓	2063832.500	✓	2068432.500	✓
550	2063632.550	✓	2063832.550	✓	2068432.550	✓
630	2063632.630	✓	2063832.630	✓	2068432.630	✓
700	2063632.700	✓	2063832.700	✓	2068432.700	✓
800	2063632.800	✓	2063832.800	✓	2068432.800	✓
900	2063632.900	✓	2063832.900	✓	2068432.900	✓
1000	2063632.1000	✓	2063832.1000	✓	2068432.1000	✓
1100	2063632.1100	✓	2063832.1100	✓	2068432.1100	✓
1250	2063632.1250	✓	2063832.1250	✓	2068432.1250	✓
1400	2063632.1400	✓	2063832.1400	✓	2068432.1400	✓
1500	2063632.1500*		2063832.1500*		2068432.1500*	
1600	2063632.1600*		2063832.1600*		2068432.1600*	
* Rated 600Vac - IEC						
Weight [kg / 1]						
0.80	0.80		0.80	0.80	0.50	0.50
Units per Package						
3	3		3	3	3	3

Accessories

 E309038				
Microswitch		Page		
2800104	Standard	448 - 449		
2801104	Low level			

URS

E180276

Rated Voltage
 $690V_{AC}/600V_{AC}$
 $700V_{AC}$

Rated Breaking Test
 Capacity

200kA

Voltage
 IEC - $1.1U_n$
 UL - $1.0U_n$

Class
 aR

Standard(s)

UL 248-13


IEC 60269-4

VDE 0636- Part 40




Size SQB3 - North American

	US-Blade Short With fitting for microswitch	US-Long Long With fitting for microswitch	US-Threaded 1/2" UNC With fitting for microswitch
	2063632	2063832	2068432
	Dimensions [in / mm]		
A	1.93 / 49	1.93 / 49	1.93 / 49
B	1.38 / 35	1.38 / 35	1.10 / 28
C	0.63 / 16	0.63 / 16	
D	2.87 / 73	2.87 / 73	2.87 / 73
E ₁	4.29 / 109	5.04 / 128	
E ₂	2.87 / 73	3.70 / 94	
F	0.24 / 6	0.24 / 6	
G	3.46 / 88	3.46 / 88	3.46 / 88
H	4.37 / 111	4.37 / 111	4.37 / 111
L	5.28 / 134	6.06 / 154	2.00 / 51
M			1/2-UNC - Thread Depth 0.47 / 12
Torque Max			52N•m / 38.3lb•ft

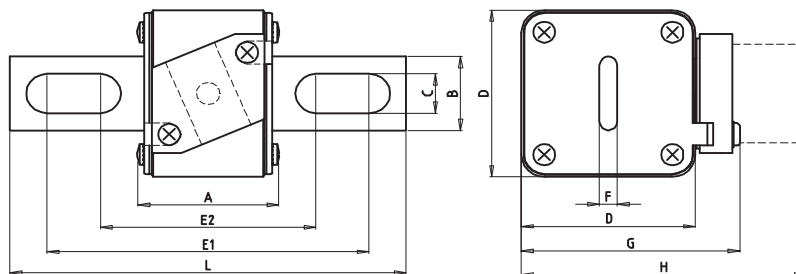

2063632 / 2063832

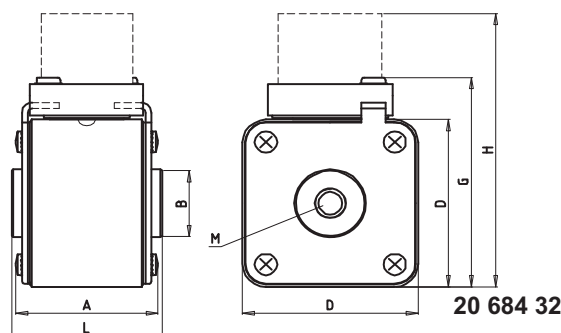

2068432

SIBA LLC

29 Fairfield Place
 West Caldwell, New Jersey 07006

Phone 1-973-575-7422
 Fax 1-973-575-5858

e-mail: info@sibafuse.com
www.siba-fuses.us