

[Article Page](#)

Product Description

Name
Order number
Matchcode
Switching distance
Switch type

reflex light probe
KORT500-M18MB71-DPU-IR
08361250219
M18B-D0500P-CX9C4U2
500 mm

100110



Programmable

DC PNP

IR Infrared light 880 nm

Signal Type


Illuminant

Connection



Cable

Connection diagramm

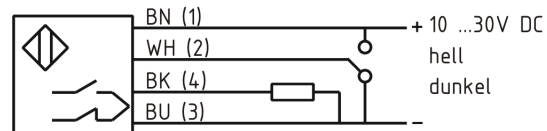

M18 x 71

Dimension (in mm)

Technical Specification

Signal type
Operating voltage
Max. load current
No load current
Switching frequency
Operating temperature
Switching state
Sensitivity adjustable
Sensing range adjustable
Short-circuit proof
Overload protection
Reverse voltage protection
Protection category
EMC-level
Termination

Diffuse mode sensor

10 - 30 V DC

200 mA

< 30 mA

300

-25 ° C to 55 ° C

LED

ja

nein

yes

yes

yes

IP67

DIN EN 60947-5-2:2008

2m PVC 4x0,5mm²

Errors and omissions exceptet