


PU Series Solenoid Valve



Symbol




How to Order

PU	220	-	01	-	AC110V	-	E
PU: Two-position two-way	Acting type 220: Direct acting 225: Pilot actuated		Port connection 01: 1/8 02: 1/4 03: 3/8 04: 1/2 06: 3/4 08: 1 12: 1 1/4 14: 1 1/2 20: 2		Voltage DC12V DC24V AC24V 50Hz/60Hz AC110V 50Hz/60Hz AC220V 50Hz/60Hz AC380V 50Hz/60Hz		Seal Blank: NBR V: VITON E: EPDM

Technical data

Model	PU220-01	PU220-02	PU220-03	PU220-04	PU220-06	PU220-08	PU225-03	PU225-04	PU225-06
Working medium	Air, Water, Oil								
Acting type	220: Direct acting / 225: Pilot actuated								
State when not actuated	Normal Closed Type						N.O. and N.C. for option		
CV	0.10	0.18	1.00	4.00	8.60	11.00	4.50	4.50	12.00
Port connection	G1/8	G1/4	G3/8	G1/2	G3/4	G1	G3/8	G1/2	G3/4
Fluid viscosity	Below 50 CST								
Working pressure	0~0.7MPa								
Proof pressure	1.05MPa								
Operating temperature range	-5+80℃								

Dimensions(mm)

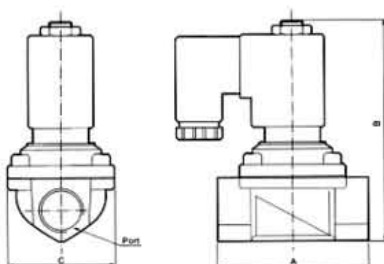

Model	Port	A	B	C
PU220-01	G1/8	22	72	22
PU220-02	G1/4	35	75.5	25.4
PU220-03	G3/8	55	79.5	30
PU220-04	G1/2	66.5	101	48
PU220-06	G3/4	71	107	58
PU220-08	G1	96	120	70
PU225-03	G3/8	66.5	107.5	48
PU225-04	G1/2	66.5	106.5	48
PU225-06	G3/8	96.5	125.0	70