



ASK 81.4




PB_ASK81.4_online-zoom.jpg

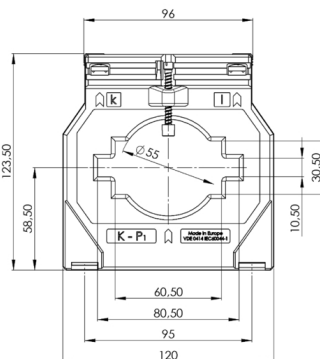

TZ_ASK81.4_F_online-zoom.jpg

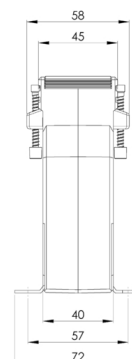

TZ_ASK81.4_S_online-zoom.jpg



TZ_ASK81.4_T_online-zoom.jpg

Description

Plug-in current transformer for primary nominal currents from 400 A up to 2000 A, secondary nominal current 5 A or 1 A (optional 2 A), accuracy class 0.2s, 0.5 and 1 (optional in class 0.2 and 0.5s).

Technical Data

- Therm. nominal continuous current I_{cth} : $1,0 \times I_N$
- Therm. nominal short-time current I_{th} : $60 \times I_N$, 1 sec.
- Max. operating voltage U_m : 0.72 kV
- Isolation test voltage: 3 kV, U_{eff} , 50 Hz, 1 min.
- Nominal rated frequency: 50...60 Hz
- Isolation class: E
- Bus bar 1: 80 x 10 mm
- Bus bar 2: 60 x 30 mm
- Bus bar 3: 2 x 60 x 10 mm
- Round conductor: 55 mm
- Width: 120 mm
- Height: 123,5 mm
- Depth: 58 mm

type description	type name	type number	primary current	secondary current VA	accuracy
ASK 81.4 400/5A	ASK	81.4	400	5 2,5	1

2,5VA KI.1

ASK 81.4 400/5A	ASK	81.4	400	5	5	1
-----------------	-----	------	-----	---	---	---

5VA KI.1

ASK 81.4 400/5A	ASK	81.4	400	5	10	1
-----------------	-----	------	-----	---	----	---

10VA KI.1

ASK 81.4 500/5A	ASK	81.4	500	5	2,5	1
-----------------	-----	------	-----	---	-----	---

2,5VA KI.1

ASK 81.4 500/5A	ASK	81.4	500	5	5	1
-----------------	-----	------	-----	---	---	---

5VA KI.1

ASK 81.4 500/5A	ASK	81.4	500	5	10	1
-----------------	-----	------	-----	---	----	---

10VA KI.1

ASK 81.4 600/5A	ASK	81.4	600	5	2,5	1
-----------------	-----	------	-----	---	-----	---

2,5VA KI.1

ASK 81.4 600/5A	ASK	81.4	600	5	5	1
-----------------	-----	------	-----	---	---	---

5VA KI.1

ASK 81.4 600/5A	ASK	81.4	600	5	10	1
-----------------	-----	------	-----	---	----	---

10VA KI.1

ASK 81.4 750/5A	ASK	81.4	750	5	2,5	1
-----------------	-----	------	-----	---	-----	---

2,5VA KI.1

ASK 81.4 750/5A	ASK	81.4	750	5	5	1
-----------------	-----	------	-----	---	---	---

5VA KI.1

ASK 81.4 750/5A	ASK	81.4	750	5	10	1
-----------------	-----	------	-----	---	----	---

10VA KI.1

ASK 81.4 750/5A	ASK	81.4	750	5	15	1
-----------------	-----	------	-----	---	----	---

15VA KI.1

ASK 81.4 800/5A	ASK	81.4	800	5	2,5	1
-----------------	-----	------	-----	---	-----	---

2,5VA KI.1

ASK 81.4 800/5A	ASK	81.4	800	5	5	1
-----------------	-----	------	-----	---	---	---

5VA KI.1

ASK 81.4 800/5A	ASK	81.4	800	5	10	1
-----------------	-----	------	-----	---	----	---

10VA KI.1

ASK 81.4 800/5A	ASK	81.4	800	5	15	1
-----------------	-----	------	-----	---	----	---

15VA KI.1

ASK 81.4 1000/5A	ASK	81.4	1000	5	2,5	1
------------------	-----	------	------	---	-----	---

2,5VA KI.1

ASK 81.4 1000/5A	ASK	81.4	1000	5	5	1
------------------	-----	------	------	---	---	---

5VA KI.1

ASK 81.4 1000/5A	ASK	81.4	1000	5	10	1
------------------	-----	------	------	---	----	---

10VA KI.1

ASK 81.4 1000/5A	ASK	81.4	1000	5	15	1
------------------	-----	------	------	---	----	---

15VA KI.1

ASK 81.4 1000/5A	ASK	81.4	1000	5	30	1
------------------	-----	------	------	---	----	---

30VA KI.1

ASK 81.4 1200/5A ASK	81.4	1200	5	5	1
----------------------	------	------	---	---	---

5VA KI.1

ASK 81.4 1200/5A ASK	81.4	1200	5	10	1
----------------------	------	------	---	----	---

10VA KI.1

ASK 81.4 1200/5A ASK	81.4	1200	5	15	1
----------------------	------	------	---	----	---

15VA KI.1

ASK 81.4 1250/5A ASK	81.4	1250	5	5	1
----------------------	------	------	---	---	---

5VA KI.1

ASK 81.4 1250/5A ASK	81.4	1250	5	10	1
----------------------	------	------	---	----	---

10VA KI.1

ASK 81.4 1250/5A ASK	81.4	1250	5	15	1
----------------------	------	------	---	----	---

15VA KI.1

ASK 81.4 1500/5A ASK	81.4	1500	5	5	1
----------------------	------	------	---	---	---

5VA KI.1

ASK 81.4 1500/5A ASK	81.4	1500	5	10	1
----------------------	------	------	---	----	---

10VA KI.1

ASK 81.4 1500/5A ASK	81.4	1500	5	15	1
----------------------	------	------	---	----	---

15VA KI.1

ASK 81.4 1500/5A ASK	81.4	1500	5	30	1
----------------------	------	------	---	----	---

30VA KI.1

ASK 81.4 1600/5A ASK	81.4	1600	5	5	1
----------------------	------	------	---	---	---

5VA KI.1

ASK 81.4 1600/5A ASK	81.4	1600	5	10	1
----------------------	------	------	---	----	---

10VA KI.1

ASK 81.4 1600/5A ASK	81.4	1600	5	15	1
----------------------	------	------	---	----	---

15VA KI.1

ASK 81.4 1600/5A ASK	81.4	1600	5	30	1
----------------------	------	------	---	----	---

30VA KI.1

ASK 81.4 2000/5A ASK	81.4	2000	5	10	1
----------------------	------	------	---	----	---

10VA KI.1

ASK 81.4 2000/5A ASK	81.4	2000	5	15	1
----------------------	------	------	---	----	---

15VA KI.1

ASK 81.4 2000/5A ASK	81.4	2000	5	30	1
----------------------	------	------	---	----	---

30VA KI.1

ASK 81.4 400/1A ASK	81.4	400	1	2,5	1
---------------------	------	-----	---	-----	---

2,5VA KI.1

ASK 81.4 400/1A ASK	81.4	400	1	5	1
---------------------	------	-----	---	---	---

5VA KI.1

ASK 81.4 400/1A ASK	81.4	400	1	10	1
---------------------	------	-----	---	----	---

10VA KI.1

ASK 81.4 500/1A ASK	81.4	500	1	2,5	1
---------------------	------	-----	---	-----	---

2,5VA KI.1

ASK 81.4 500/1A	ASK	81.4	500	1	5	1
-----------------	-----	------	-----	---	---	---

5VA KI.1

ASK 81.4 500/1A	ASK	81.4	500	1	10	1
-----------------	-----	------	-----	---	----	---

10VA KI.1

ASK 81.4 600/1A	ASK	81.4	600	1	2,5	1
-----------------	-----	------	-----	---	-----	---

2,5VA KI.1

ASK 81.4 600/1A	ASK	81.4	600	1	5	1
-----------------	-----	------	-----	---	---	---

5VA KI.1

ASK 81.4 600/1A	ASK	81.4	600	1	10	1
-----------------	-----	------	-----	---	----	---

10VA KI.1

ASK 81.4 750/1A	ASK	81.4	750	1	2,5	1
-----------------	-----	------	-----	---	-----	---

2,5VA KI.1

ASK 81.4 750/1A	ASK	81.4	750	1	5	1
-----------------	-----	------	-----	---	---	---

5VA KI.1

ASK 81.4 750/1A	ASK	81.4	750	1	10	1
-----------------	-----	------	-----	---	----	---

10VA KI.1

ASK 81.4 750/1A	ASK	81.4	750	1	15	1
-----------------	-----	------	-----	---	----	---

15VA KI.1

ASK 81.4 800/1A	ASK	81.4	800	1	2,5	1
-----------------	-----	------	-----	---	-----	---

2,5VA KI.1

ASK 81.4 800/1A	ASK	81.4	800	1	5	1
-----------------	-----	------	-----	---	---	---

5VA KI.1

ASK 81.4 800/1A	ASK	81.4	800	1	10	1
-----------------	-----	------	-----	---	----	---

10VA KI.1

ASK 81.4 800/1A	ASK	81.4	800	1	15	1
-----------------	-----	------	-----	---	----	---

15VA KI.1

ASK 81.4 1000/1A	ASK	81.4	1000	1	5	1
------------------	-----	------	------	---	---	---

5VA KI.1

ASK 81.4 1000/1A	ASK	81.4	1000	1	10	1
------------------	-----	------	------	---	----	---

10VA KI.1

ASK 81.4 1000/1A	ASK	81.4	1000	1	15	1
------------------	-----	------	------	---	----	---

15VA KI.1

ASK 81.4 1000/1A	ASK	81.4	1000	1	30	1
------------------	-----	------	------	---	----	---

30VA KI.1

ASK 81.4 1200/1A	ASK	81.4	1200	1	5	1
------------------	-----	------	------	---	---	---

5VA KI.1

ASK 81.4 1200/1A	ASK	81.4	1200	1	10	1
------------------	-----	------	------	---	----	---

10VA KI.1

ASK 81.4 1200/1A	ASK	81.4	1200	1	15	1
------------------	-----	------	------	---	----	---

15VA KI.1

ASK 81.4 1250/1A	ASK	81.4	1250	1	5	1
------------------	-----	------	------	---	---	---

5VA KI.1

ASK 81.4 1250/1A ASK	81.4	1250	1	10	1
----------------------	------	------	---	----	---

10VA KI.1

ASK 81.4 1250/1A ASK	81.4	1250	1	15	1
----------------------	------	------	---	----	---

15VA KI.1

ASK 81.4 1500/1A ASK	81.4	1500	1	5	1
----------------------	------	------	---	---	---

5VA KI.1

ASK 81.4 1500/1A ASK	81.4	1500	1	10	1
----------------------	------	------	---	----	---

10VA KI.1

ASK 81.4 1500/1A ASK	81.4	1500	1	15	1
----------------------	------	------	---	----	---

15VA KI.1

ASK 81.4 1500/1A ASK	81.4	1500	1	30	1
----------------------	------	------	---	----	---

30VA KI.1

ASK 81.4 1600/1A ASK	81.4	1600	1	5	1
----------------------	------	------	---	---	---

5VA KI.1

ASK 81.4 1600/1A ASK	81.4	1600	1	10	1
----------------------	------	------	---	----	---

10VA KI.1

ASK 81.4 1600/1A ASK	81.4	1600	1	15	1
----------------------	------	------	---	----	---

15VA KI.1

ASK 81.4 1600/1A ASK	81.4	1600	1	30	1
----------------------	------	------	---	----	---

30VA KI.1

ASK 81.4 2000/1A ASK	81.4	2000	1	10	1
----------------------	------	------	---	----	---

10VA KI.1

ASK 81.4 2000/1A ASK	81.4	2000	1	15	1
----------------------	------	------	---	----	---

15VA KI.1

ASK 81.4 2000/1A ASK	81.4	2000	1	30	1
----------------------	------	------	---	----	---

30VA KI.1