


Restrained Plug

AF364R3 - AF314R3
AF364RS3 - AF314RS3

300 Amp Series

660V - 1100V

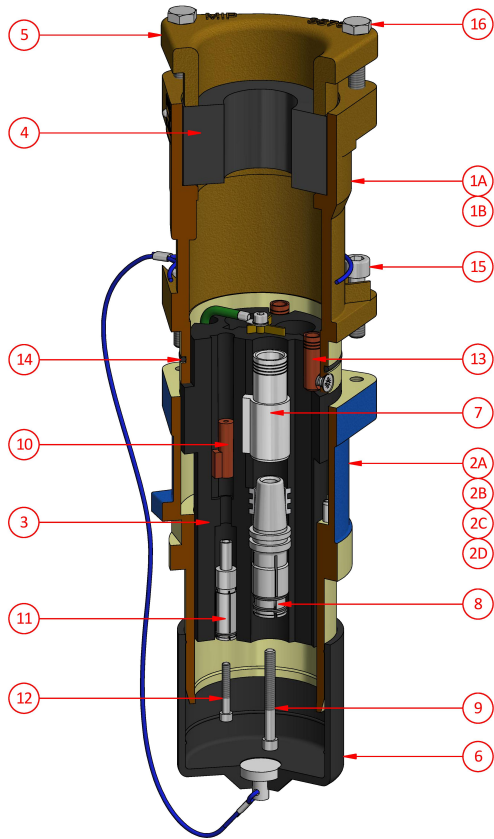

Weight
Dimensions
Compliance
Materials
IP Rating

12kg
L 150mm W 150mm H 410mm
Explosion protected to AS/NZS1299 & IEC60079 Series
Manganese Bronze / Neoprene / Stainless Steel
IP66/68

Ordering Procedure

- 1 Select complete Plug from Table 1
- 2 Select Phase Thimble from Table 2 (3 Required)
- 3 Select Grommet from Table 3

Table 1

Part Number	Description	Colour
AF364R3	660V Restrained Plug	Orange
AF314R3	1100V Restrained Plug	Blue
AF364RS3	660V Restrained Plug (Stainless steel nose cone)	Orange
AF314RS3	1100V Restrained Plug (Stainless steel nose cone)	Blue

NB: Plug supplied with Pilot Thimble

Table 2

Phase Thimble - c/w screw AH009868 1/4" x 2 1/4" skt. head			
Part Number	CSA	ID mm	Utilux Die No.
F-3347-00	25	8.0	38-92 Cu
F-3347-0	35	10.0	38-115 Cu
F-3347-1	50	11.0	38-115 Cu
F-3347-2	70	13.5	38-142 Cu
F-3347-3	95	14.5	38-165 Cu
F-3347-4	120	16.6	38-165 Cu
F-3347-5	150	18.0	38-183 Cu
F-3347-6	185	20.7	Solder Only

Table 3

Neoprene Grommets	
Part Number	Cable Acceptance mm
3054-25	22.0-25.0
3054-31	24.0-31.0
3054-35	30.0-35.0
3054-38	34.0-38.0
3054-41	37.0-41.0
3054-45	40.0-45.0
3054-47	44.0-47.0
3054-51	46.0-51.0
3054-54	50.0-54.0
3054-57	53.0-57.0
3054-60	56.0-60.0
3054-64	59.0-64.0
3054-67	63.0-67.0
3054-70	66.0-70.0
3054-73	69.0-73.0
3054-76	72.0-76.0

Options

Earth Thimble - c/w screw AH151028 M6 x 16 csk. head			
Part Number	Cable Acceptance mm	ID mm	Utilux Die No.
F-4648	10	4.7	38-57 Cu
F-4648-1	16	5.5	38-63 Cu
F-4648-2	25	7.1	38-77 Cu
F-4648-3	35	8.4	38-92 Cu

NB: F-4648-3 supplied with Plug

Spare Parts

#	Part Number	Description
1A	F-3339-364	660V Small Gland Body c/w items 1A, 5, 14, 15 & 16
1B	F-3339-314	1100V Small Gland Body c/w items 1A, 5, 14, 15 & 16
2A	F-3342-364	660V Nose Cone
2B	F-3342-314	1100V Nose Cone
2C	F-3342-364SS	660V Nose Cone Stainless Steel
2D	F-3342-314SS	1100V Nose Cone Stainless Steel
3	F-3340	Interior c/w Earth lead, Screw & Washer
4	See Table 3	Neoprene Grommet
5	3576B	Clamping Cap
6	F-264L	Protection Cap

#	Part Number	Description
7	See Table 2	Phase Thimble
8	F-201-299	Phase Socket
9	AH009868	Screw 1/4" x 2 1/4" skt. head
10	F-3589-1	Pilot Thimble c/w screw AH009834 3/16" x 1 1/4" skt. head
11	F-3138-2	Pilot Socket
12	AH009834	Screw 3/16" x 1 1/4" skt. head
13	F-4648-3	Earth Thimble c/w screw AH151028 M6 x 16 csk. head
14	AI019011	O-ring ID 91.67 x sect. 3.53
15	AH117113	Screw M10 x 40 skt. head
16	AH113116S	Screw M10 x 50 hex. head