

**Single Output with DC Bus Bars, AC Input 1P Terminal Block &
DB25 Option Connector**

**Replacement for Cherokee Model CAR1432FP
32.5V @ 43A, 1.4kW, 90 to 264VACVAC 1P**

**Air Flow
Built-in Fan**

Right View




5" x 5" x 11.25"

**Option Connector DB25 Pin
Definition: (Typical Options)**

Pin 1: Remote Sense +
Pin 4: Remote Sense -
Pin 3: DC Good with LED (-128L)
Pin 5: Logic Return
Pin 7: AC Fail (1C)
Pin 8: Current Monitor (-33)
Pin 9: Output Enable/Disable (-2T)
All Other Pins NC

IO Connections

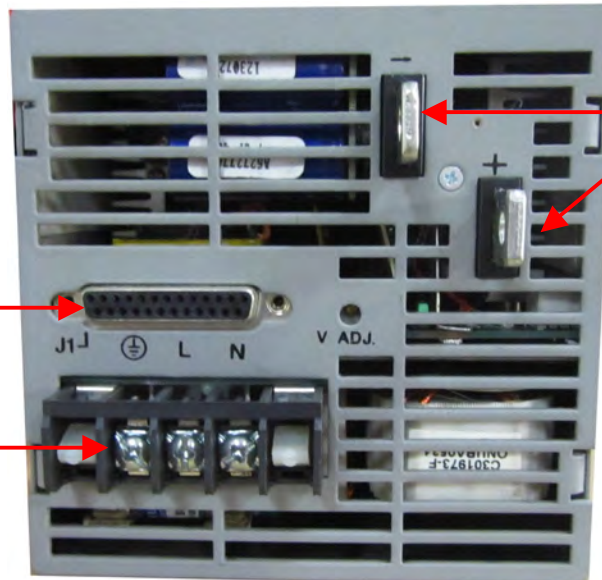

**DC Output
Bus Bars
32.5V @ 43A**

**DB25 Option
Connector**

**90 to 264VAC, 1P
AC Input**

On request, All I/O wire harnesses will be provided with the unit

PM3327-6-1-3-F, 1.4kW, 10/27/2016

Pioneer Magnetics' reserves the right to change the specifications at any time without prior notice.
It is Pioneer Magnetics' policy to improve products as new techniques and components become available.
1745 Berkeley Street, Santa Monica CA 90404. Tel: (310) 829-6751 Fax: (310) 453-3929.
E-mail: pmi@pioneeermagnetics.com. Web Address: <http://www.pioneeermagnetics.com>